

Twist-Lock® Devices  
 30A, 3 Phase 600V AC, 3 Pole, 4 Wire  
 Grounding  
 Insulgrip® Plug

# HUBBELL



## Features

- Ribbed nylon housing provides a secure grip and impact and chemical resistance.
- Superior cord grip design protects terminations from excess strain.
- Clear, funnel shaped wire entry for ease of termination.
- Integral dust shield protects wiring chamber from dust or contaminants.

## Ordering Information

| Description            | Cord Diameter       | UPC          | Catalog Number |
|------------------------|---------------------|--------------|----------------|
| Black and white nylon. | .350"-1.150" (9-29) | 783585039374 | HBL2741        |

## Listings


Listed to UL 498  
 Fed.Spec. W-C-596  
 Certified to CSA C22.2 No.42

## Specifications

|                      |   |
|----------------------|---|
| Housing / Cord Clamp | Nylon   |
| Terminal Retainer    | Clear polycarbonate                           |
| Blades               | Brass   |
| Terminal Screws      | #10-32 Brass (Phillips / Slotted / Robertson) |
| Terminal Clamp       | Cold rolled steel – nickel plated             |
| Assembly Screws      | Steel - nickel plated                         |

## Performance

|                         |  |
|-------------------------|--|
| <b>Electrical</b>       |  |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |  |
| Terminal Accommodation  | #16 AWG - #8 AWG stranded copper wire only.              |
| Terminal Identification | Terminals identified in accordance with UL 498           |
| <b>Environmental</b>    |  |
| Flammability            | HB or better per UL94/CSA 22.2 No.0.17                   |
| Moisture Resistance     | IP20 Suitability   |
| Operating Temperatures  | Maximum Continuous 75°C; Minimum -40°C (w/o impact)      |

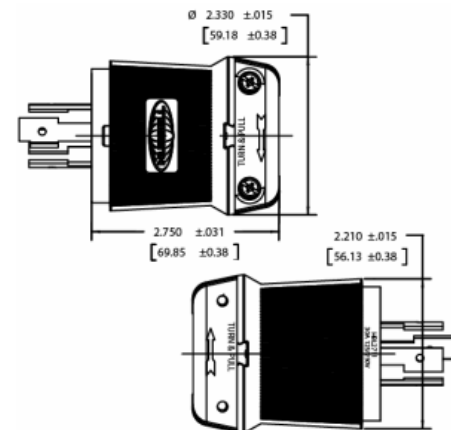

## Accessories

|                    |         |
|--------------------|---------|
| Connector          | HBL2743 |
| Single Receptacle  | HBL2740 |
| Flanged Receptacle | HBL2746 |
| Weatherproof Boot  | HBL6035 |

## Resources

Customer Use Drawing  
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

