

## Single Pole Devices and Temporary Power

30A, 120/240V AC

### Spider® II Temporary Power Boxes

#### Features

- Individual GFCI modules
- TYPE 3R metallic enclosure and heavy duty, abuse resistant legs
- Standard stab termination circuit breakers with gasketed lift cover

#### Ordering Information

Description	Product Type	UPC	Catalog Number
Spider Box, 30A, Straight Blade	Spider II Boxes	783585370897	SDSB1A

#### Standards

UL 1640 cUL and CSA, UL 943

#### Specifications

Enclosure Type	3R, rainproof, suitable for use in damp locations
Code Compliance	NEC®, ANSI/NFPA 70


#### Performance

Environment	
Moisture Resistance	Indoor and outdoor wet and dry locations


#### Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

# HUBBELL

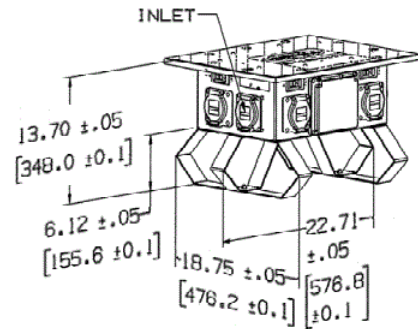

GFCI MODULES ON ALL  
20A INLETS/RECEPTACLES  
REPLACEMENT CAT NO. GFM20

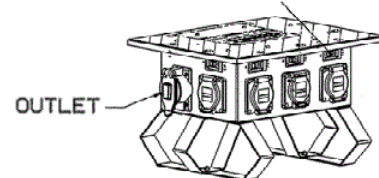

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

