

Straight Blade Devices

20A, 125V, 2 Pole, 3 Wire Grounding

HBL<sup>®</sup> Extra Heavy Duty MAX Specification Grade Single Receptacle


- Features
- One-piece brass integral ground strap
  - Unique bypass contact design

Ordering Information			
Description	Device Color	UPC Number	Catalog Number
Panel mount on 1.94 in. (49.3) centers	Brown	783585014722	HBL5357

- Listings
- UL Listed to UL498 File No. E2186  
Certified to CSA 22.2, No. 42 File 285  
Fed. Spec. W-C-596  
NEMA<sup>®</sup> WD-6 Compliant

Specifications	
Face	Nylon
Base	PBT
Power Contacts	.037 in. (.9) Brass
Ground Contact	Brass
Mounting Strap	.050" (1.3) Brass
Auto Self-grounding Clip	Stainless steel
Mounting Screws	Zinc plated steel

Performance	
<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#12-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
<b>Environmental</b>	
Flammability	Top: UL 94V-2, Base: UL 94V-0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

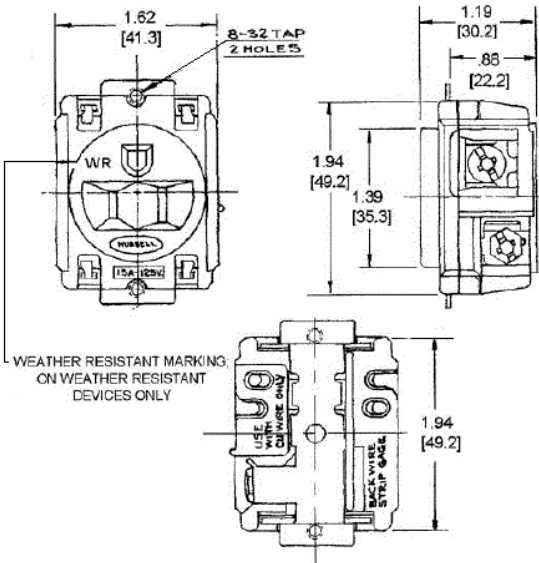

Online Resources

Customer Sales Drawings  
eCatalog

