

Data sheet for three-phase Squirrel-Cage-Motors

Totally Enclosed Fan Cooled (TEFC)



MLFB-Ordering data: 1LE2321-2AB21-4GA3

Motor type: SD100 - NEMA Premium Efficiency

Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

U [V]	Δ / Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]					Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque	T _A /T _N	T _k /T _N	
						4/4	3/4	1/2	0	LRC	4/4	3/4	1/2	4/4	3/4	1/2	[lb-ft]	LRT [%]	BDT [%]	
460	Y	60	10.00	7.50	1,755	12.50	10.00	8.00	6.10	81.0	91.7	92.2	91.7	81.7	76.2	63.8	30.0	270	410	
230	YY	60	10.00	7.50	1,755	25.00	19.99	16.00	12.20	162.0	91.7	92.2	91.7	81.7	76.2	63.8	30.0	270	410	
Frame Type 215TC			Type of constr.: (G) Round body - C-Face							Ins. Cl.: F		Motor Prot.: (A) Without Protection					NEMA Des.: B		S.F.: 1.15	
Mtr WT: 180 lbs			Mounting: (3) F-1, Standard Floor Mount, T. Box LHS							Temp. Rise Cl.: B		Amb. Temp.: +40 to -20 °C @1000 m					kVA: H		IP55	

Mechanical data

WK2

Rotor Moment of Inertia: 1 Lb-ft²

Ext Load Inertia Capability: 51.0 Lb-ft²

Safe Stall Time

Hot: 20.0 s

Cold: 36.0 s

Typical Noise Data

A-weighted Sound

Sound Pressure: 69.0 dB(A)

Sound Power: 57.0 dB(A)

Octave Band Center Frequencies Hertz

	250	500	1000	2000	4000	8000	Hz
SPL@3 feet	37.0	44.0	54.0	53.0	44.0	35.0	dB(A)

Bearings

	DE	NDE
Bearing size:	6208 Z C3 S0	6208 Z C3 S0
Bearing Type:	Ball Bearing	Ball Bearing
AFBMA:	40BC02JP30	40BC02JP30

Grease

Capacity:	0.30 oz	0.30 oz
Type:	Exxon Mobile EM	
Thickener:	Polyurea	

Frame

Frame material:	cast iron
Coating (paint finish):	Standard Paint
Color, paint shade:	RAL 7030

Terminal box

Terminal box position: (3) F-1, Standard Floor Mount, T. Box LHS

Lead Wire Connection

Description:	9 LEAD - WYE				
Voltage	L1	L2	L3	Connected together	
LOW	T1 T7	T2 T8	T3 T9	T4 T5 T6	Y Y
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y

Ventilation Type

Type of Cooling:	TEFC
Fan Material:	Polypropylen ESD
Fan Rotation:	Bidirectional

Additional information

VFD Operation:	CT: 20:1	VT: 20:1
Area: classification:	Class I Division 2 Gr. A, B, C or D	


Notes

I_L/I_N = locked rotor current / current nominal T_k/T_N = break down torque / nominal torque
 T_A/T_N = locked rotor torque / torque nominal ¹⁾ Value is valid only for DOL operation with motor design IC411

Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

Generated:
2020-09-17 02:13

Confir® ©tre de secret d'entreprise. Tous droits r serv's.
Comunicado como secreto empresarial. Reservados todos os direitos.
Confirado como secreto de empresa. Nos reservamos todos os derechos.

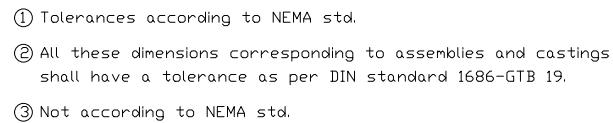


© Siemens AG 2018

Tolerance	Surface	Material	Weight	Scale
1LE2321-2AB21-4GA3 -	Author	Dimensional drawing Maßzeichnung	-	 mm
	Creator DTK			
	Approval			
	Department			
	Change Order	MLFB	Doc. Type	
	Doc. State 9/17/20	Item No	Paper Size	A3
	Revision Index RS	Doc. No	1st Language 2nd Language	en de
© Siemens AG 2018	Project No -	Ref No -	Sheet	1 of 1

SIEMENS INDUSTRY, INC.

HP 10 VOLTS < 600V RPM 1800 TYPE SD100
HZ 60 PHASE 3 FRAME 215T NEMA B


TORQUE & CURRENT VS. SPEED

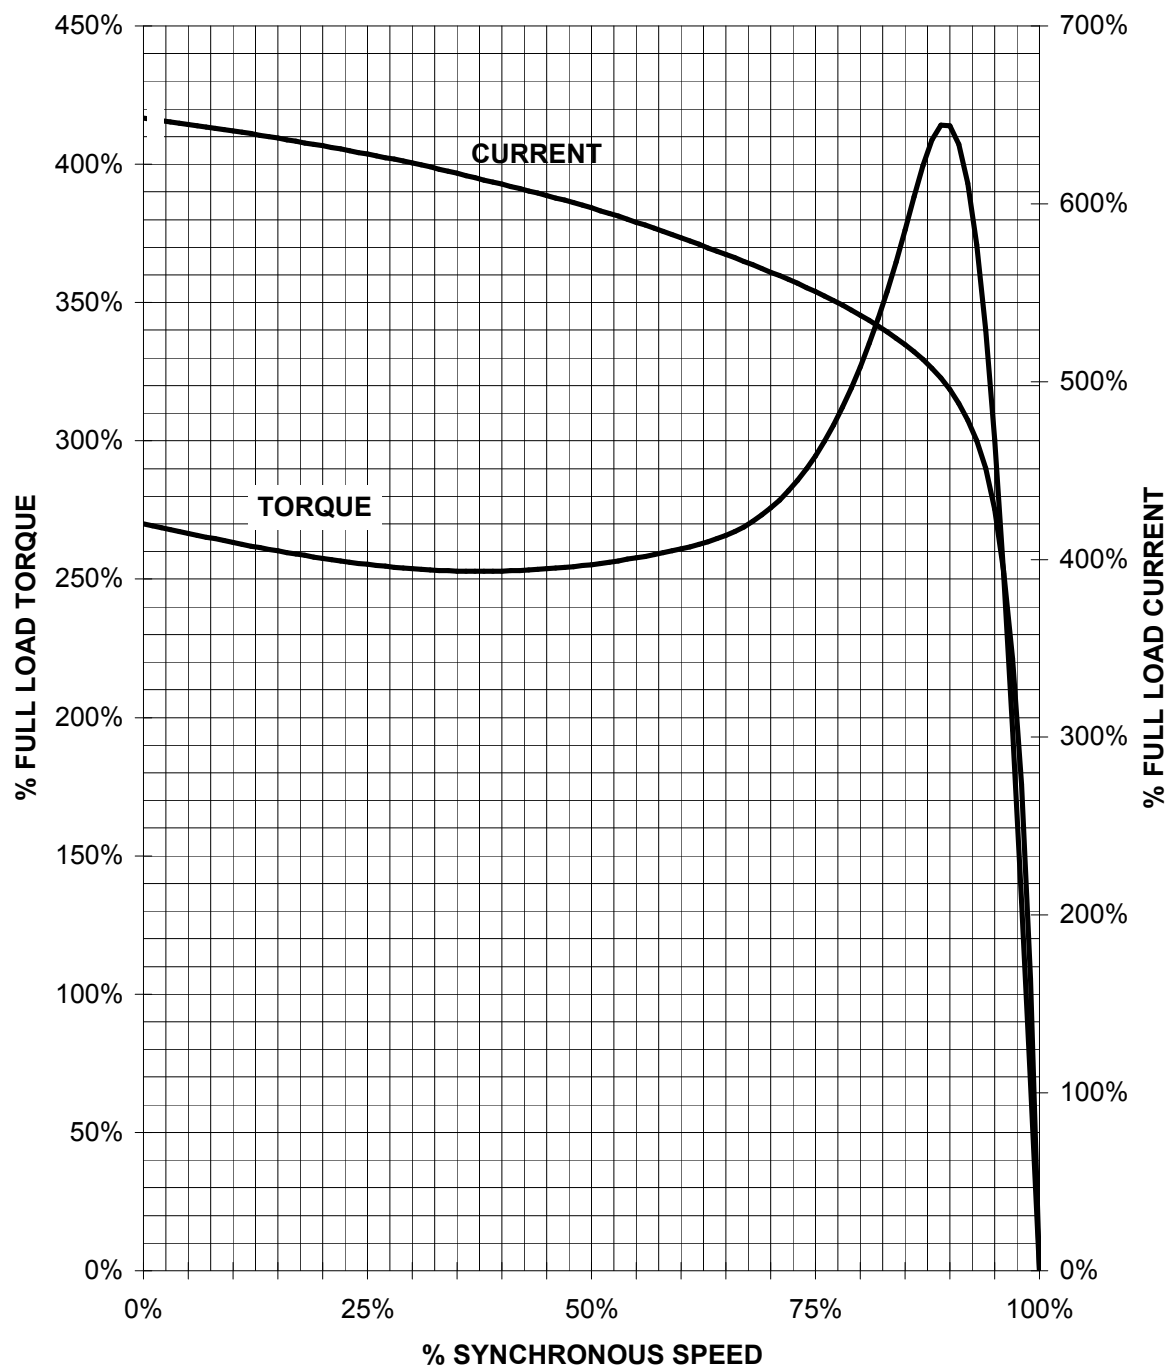

CUSTOMER: ORDER#:

10 HP 1800 RPM 215T FRAME 460 VOLTS 3 PHASE NEMA DESIGN B

SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
SD100

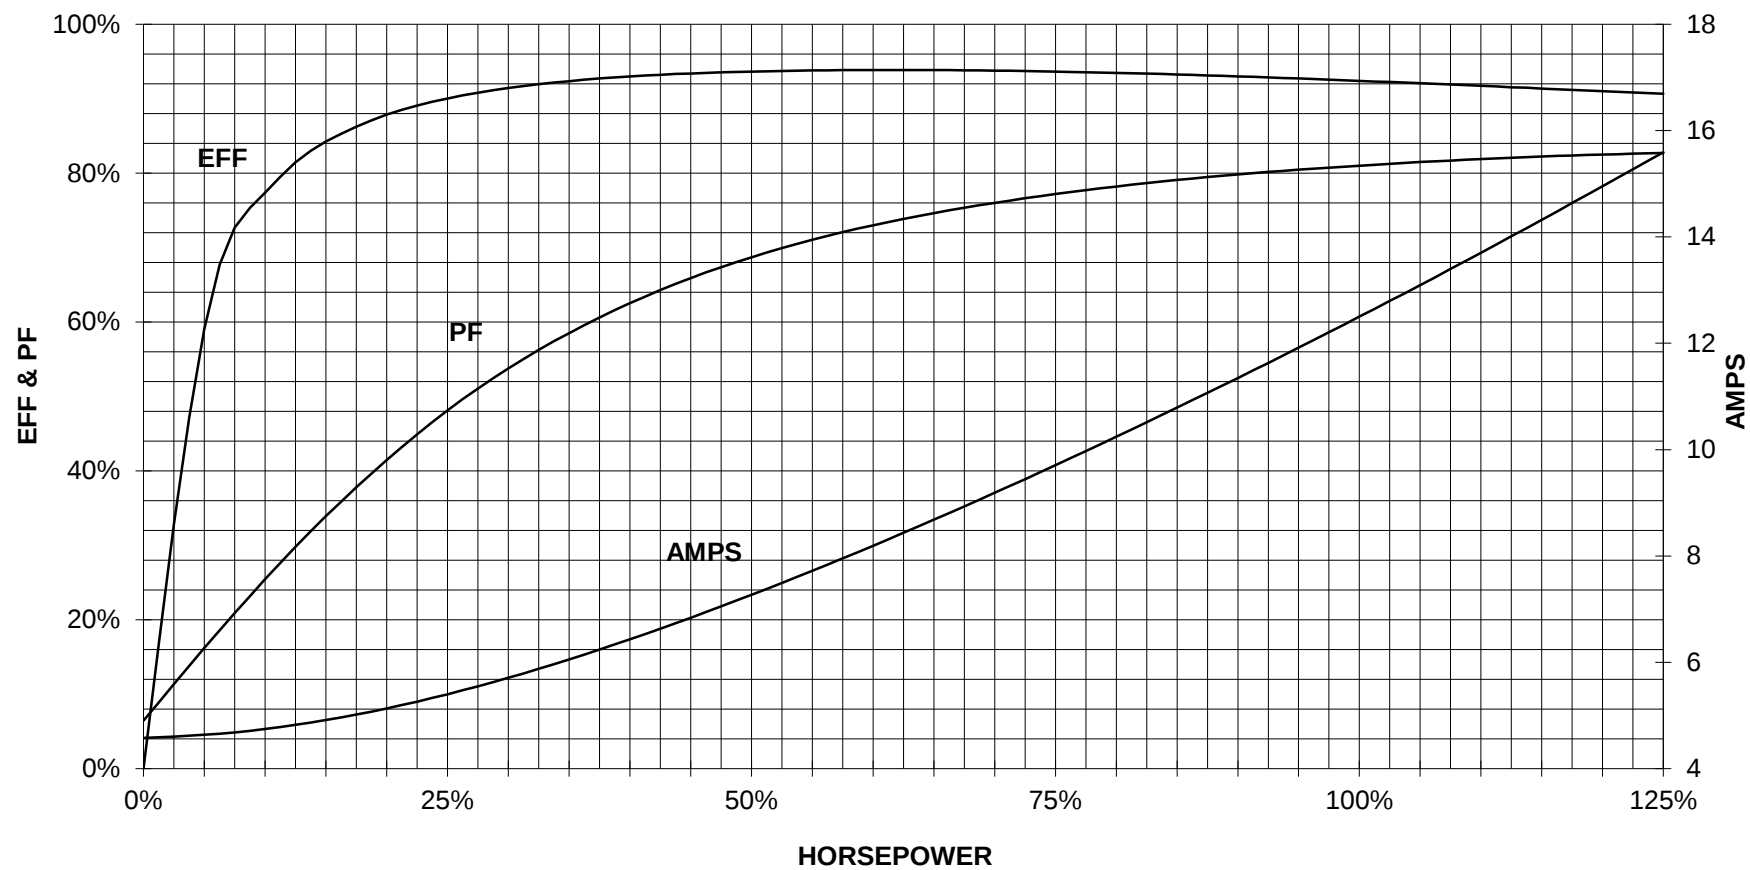

CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

Main terminal diagram



9 LEAD WYE						
Volts	LINES			CONNECTED TOGETHER	CONN.	
	L1	L2	L3			
LOW	T1 T7	T2 T6	T3 T9	T4 T5 T6	Y Y	
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y	

responsible dep.
DI MC LVM

technical reference

created by

approved by

project

SIEMENS

document type
Wiring Diagram

title
1LE2321-2AB21-4GA3

document status

free

document number

customer