

Data sheet for three-phase Squirrel-Cage-Motors

Totally Enclosed Fan Cooled (TEFC)



MLFB-Ordering data: 1LE2321-1CA31-4AA3

Motor type: SD100 - NEMA Premium Efficiency

Client order no.:

Order no.:

Offer no.:

Remarks:

Item no.:

Consignment no.:

Project:

U [V]	Δ / Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]					Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque	T _A /T _N	T _k /T _N
						4/4	3/4	1/2	0	LRC	4/4	3/4	1/2	4/4	3/4	1/2	[lb-ft]	LRT [%]	BDT [%]
460	Y	60	5.00	4.00	3,505	6.00	4.60	3.40	2.00	46.0	88.5	89.1	88.2	88.2	85.9	78.1	7.5	173	427
230	YY	60	5.00	4.00	3,505	12.00	9.18	6.80	4.00	92.0	88.5	89.1	88.2	88.2	85.9	78.1	7.5	173	427

Frame Type 184T	Type of constr.: (A) Foot mounted - End shield	Ins. Cl.: F	Motor Prot.: (A) Without Protection	NEMA Des.: B	S.F.: 1.15
Mtr WT: 129 lbs	Mounting: (3) F-1, Standard Floor Mount, T. Box LHS	Temp. Rise Cl.: B	Amb. Temp.: +40 to -20 °C @1000 m	kVA: J	IP55

Mechanical data

WK2

Rotor Moment of Inertia:	0	Lb-ft ²
Ext Load Inertia Capability:	5.7	Lb-ft ²
Safe Stall Time		
Hot:	15.0	s
Cold:	29.0	s

Typical Noise Data

A-weighted Sound		
Sound Pressure:	81.0	dB(A)
Sound Power:	69.0	dB(A)

Octave Band Center Frequencies Hertz

	250	500	1000	2000	4000	8000	Hz
SPL@3 feet	49.0	61.0	66.0	64.0	60.0	50.0	dB(A)

Bearings

	DE	NDE
Bearing size:	6206 Z C3 S0	6206 Z C3 S0
Bearing Type:	Ball Bearing	Ball Bearing
AFBMA:	30BC02JP30	30BC02JP30

Grease

Capacity:	0.20	oz	0.20	oz
Type:	Exxon Mobile EM			
Thickener:	Polyurea			

Frame

Frame material:	cast iron
Coating (paint finish):	Standard Paint
Color, paint shade:	RAL 7030

Terminal box

Terminal box position:	(3) F-1, Standard Floor Mount, T. Box LHS
------------------------	---

Lead Wire Connection

Description:			9 LEAD - WYE		
Voltage	L1	L2	L3	Connected together	
LOW	T1 T7	T2 T8	T3 T9	T4 T5 T6	Y Y
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y

Ventilation Type

Type of Cooling:	TEFC
Fan Material:	Polypropylen ESD
Fan Rotation:	Bidirectional

Additional information


VFD Operation:	CT: 4:1	VT: 20:1
Area: classification:	Class I Division 2 Gr. A, B, C or D	

Notes


I_L/I_N = locked rotor current / current nominal T_k/T_N = break down torque / nominal torque
 T_A/T_N = locked rotor torque / torque nominal ¹⁾ Value is valid only for DOL operation with motor design IC411

Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

Generated:
2020-09-17 02:03

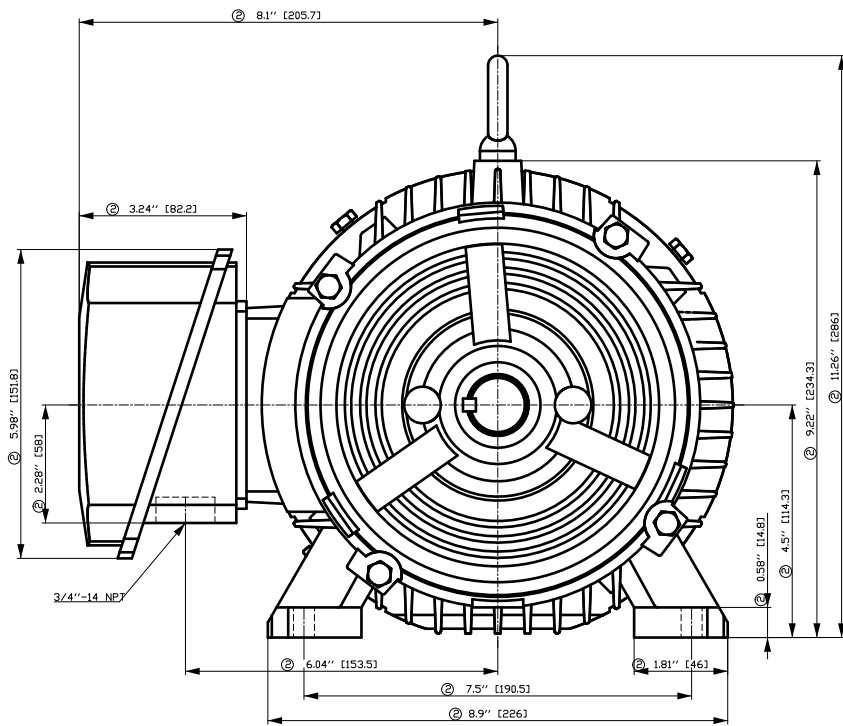

- ① Tolerances according to NEMA std.
- ② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GTB 19.
- ③ Not according to NEMA std.

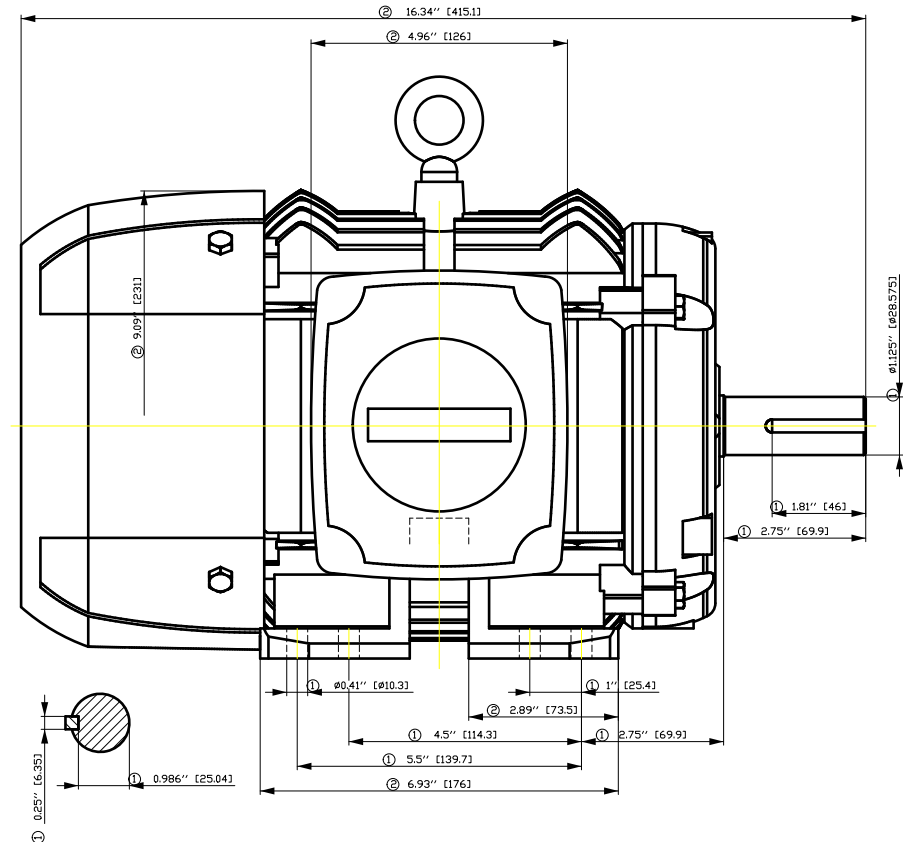


Tolerance	Surface	Material	Weight	Scale
1LE2321-1CA31-4AA3	Author	Dimensional drawing Maßzeichnung	-	mm
-	Creator DTK			
	Approval			
	Department			
SIEMENS	Change Order	MLFB	Doc Type	
	Doc. State 9/17/20	Item No	Paper Size A3	
	Revision Index RS	Doc No	1st Language en	
			2nd Language de	
© Siemens AG 2018	Project No -	Ref No -	Sheet 1 of 1	

SIEMENS INDUSTRY, INC.

HP	5	VOLTS	< 600V	RPM	3600	TYPE	SD100
HZ	60	PHASE	3	FRAME	184T	NEMA	B

TORQUE & CURRENT VS. SPEED

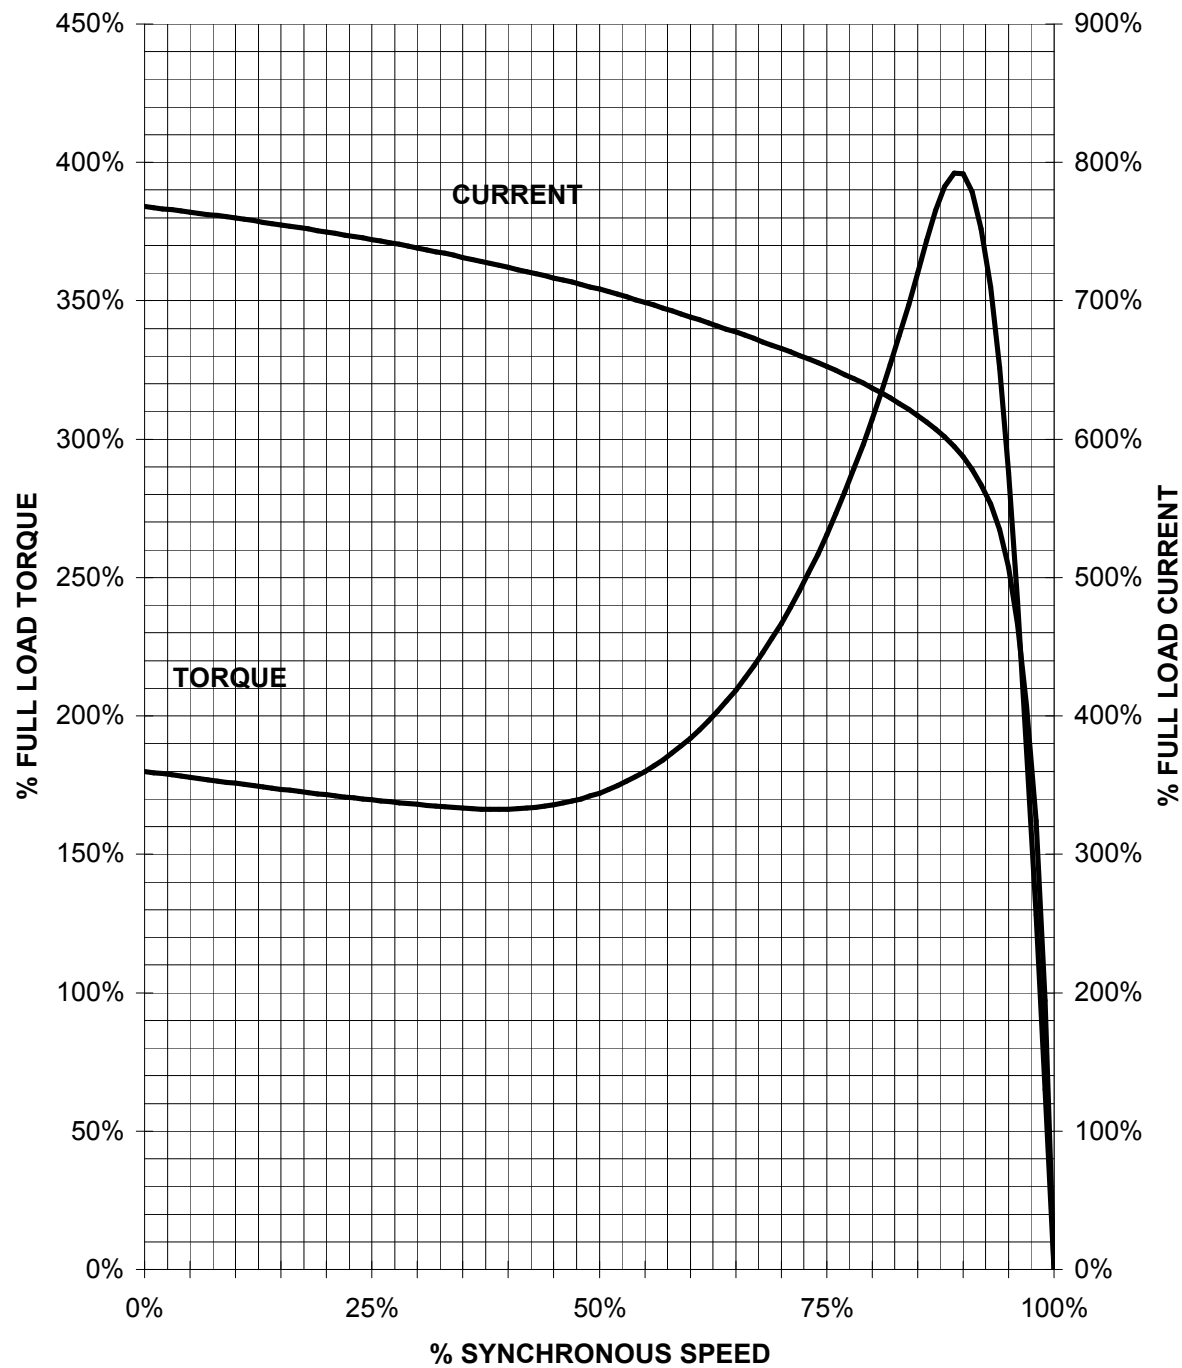


CUSTOMER: _____ ORDER#: _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.
REV. 1

5 HP 3600 RPM 184T FRAME 460 VOLTS 3 PHASE NEMA DESIGN B


SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
SD100

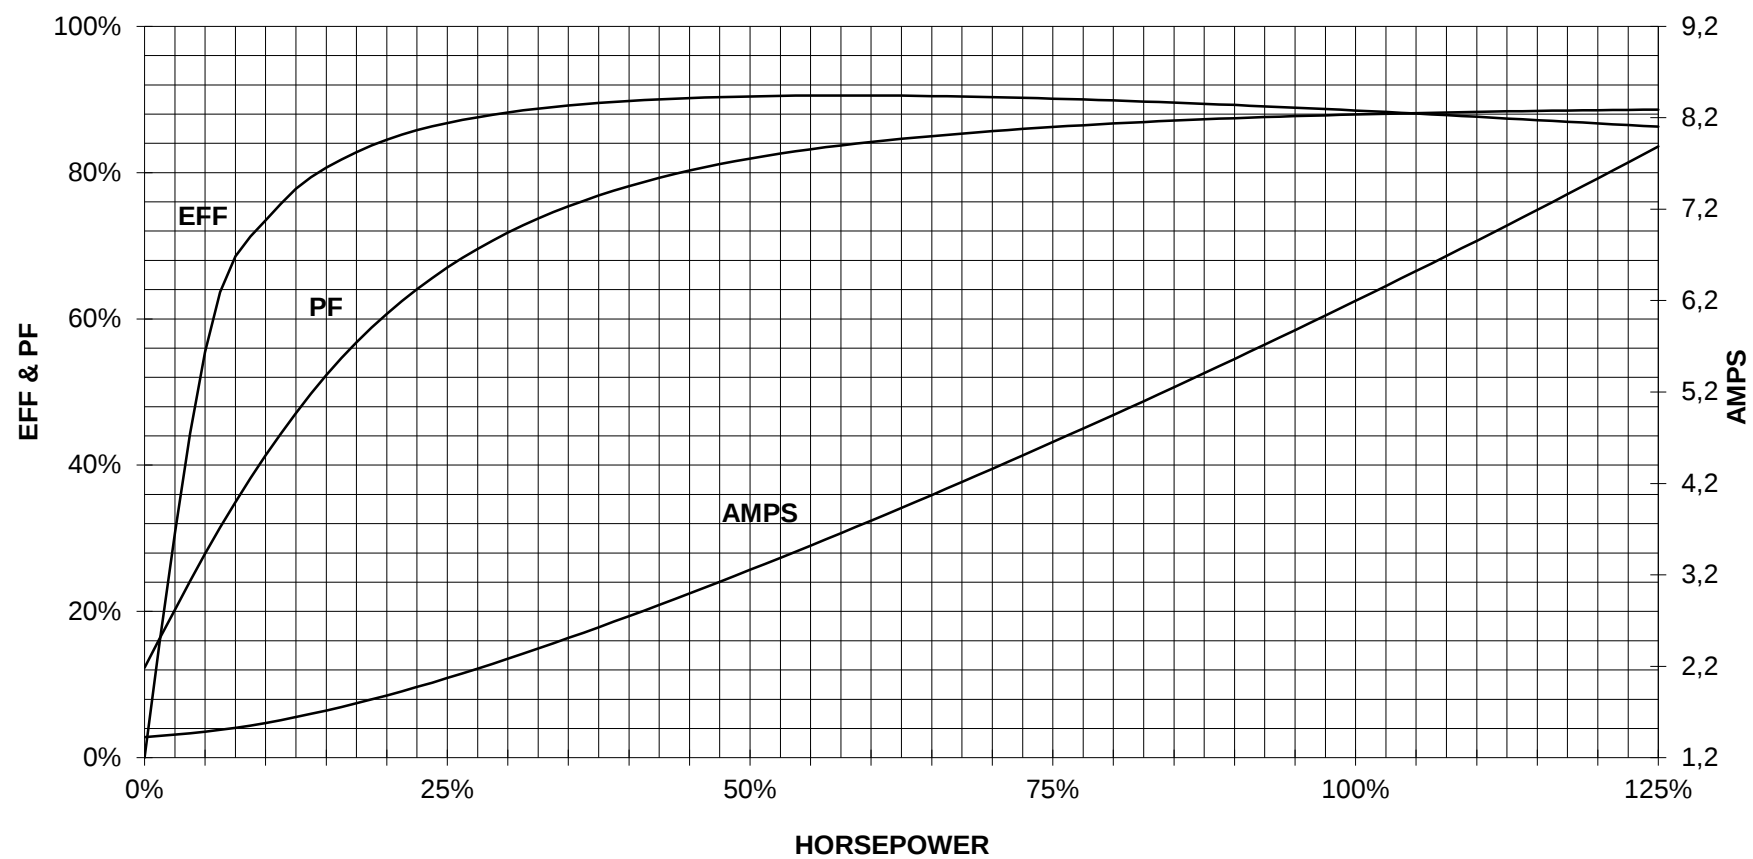

CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

Main terminal diagram



9 LEAD WYE						
Volts	LINES			CONNECTED TOGETHER	CONN.	
	L1	L2	L3			
LOW	T1 T7	T2 T6	T3 T9	T4 T5 T6	Y Y	
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y	

responsible dep. DI MC LVM	technical reference	created by	approved by	project			
	document type Wiring Diagram			document status free		customer	
	title 1LE2321-1CA31-4AA3			document number			
© Siemens AG 2019				rev. 01	creation date 12/03/2019	language en	Page 1/1