


McGILL® Inch Cam Follower Bearings



- Basic Construction Type:** Stud Type Crowned / Cylindrical Outside Diameter
- Rolling Elements:** Full Complement Needle Roller
- Bearing Material:** Bearing Quality Steel
- Seal Type:** LUBRI-DISC®
- Lubrication:** Lithium Soap Grease NLGI #2
- System Configuration:** Concentric / Eccentric / Heavy Stud
- Mounting Feature:** Slot / Hex Hole

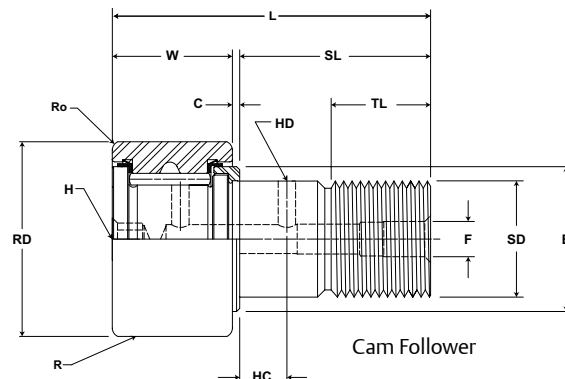

CF, CFE, CFH


Part No.		RD		W		SD		SL	C	TL	L	R	ECC	G	BD	Track Roller Dynamic Rating	Track Roller Static Rating
W/O Seals	With LUBRI-DISC Seals	Roller Diameter		Roller Width		Stud Diameter		Stud Length	Endplate Extension	Min Thread Length	Length Overall	Crown	Eccentric				
		Prefix CCF-XX		Base Modifier CFE-XX													
		inch mm		inch mm		inch mm		inch mm		inch mm		inch mm					
		Nom.	Tol.	Nom.	Tol.	Nom.	Tol.	(Ref)	(Ref)	(Ref)	(Ref)	Radius (Ref)	(Ref)	+0/- .010	±.001	lb/N	
CF 2 1/2	CF 2 1/2 S											Cylindrical				11,720 52,131	16,450 73,170
CF 2 1/2 B	CF 2 1/2 SB	2.500	+0/- .001	1.500	+0 / - .005	1.000	+ .001/-0	2.25	.031	1.125	3.78	30 762	N/A	N/A	N/A		
CCF 2 1/2	CCF 2 1/2 S	63.50	+0/- .03	38.10	+0 / - .13	25.40	+ .03/-0	57.2	.8	28.57	96.0						
CCF 2 1/2 B	CCF 2 1/2 SB																
CFE 2 1/2	CFE 2 1/2 S											Cylindrical				11,720 52,131	16,450 73,170
CFE 2 1/2 B	CFE 2 1/2 SB	2.500	+0/- .001	1.500	+0 / - .005	1.000	+ .001/-0	2.25	.031	1.125	3.78	30 762	.030	1.125	1.375		
CCFE 2 1/2	CCFE 2 1/2 S	63.50	+0/- .03	38.10	+0 / - .13	25.40	+ .03/-0	57.2	.8	28.57	96.0		.76	28.58	34.93		
CCFE 2 1/2 B	CCFE 2 1/2 SB																
CFH 2 1/2	CFH 2 1/2 S											Cylindrical				11,720 52,131	32,900 146,339
CFH 2 1/2 B	CFH 2 1/2 SB	2.500	+0/- .001	1.500	+0 / - .005	1.250	+ .001/-0	2.25	.031	1.125	3.78	30 762	N/A	N/A	N/A		
CCFH 2 1/2	CCFH 2 1/2 S	63.50	+0/- .03	38.10	+0 / - .13	31.75	+ .03/-0	57.2	.8	28.57	96.0						
CCFH 2 1/2 B	CCFH 2 1/2 SB																
CF 2 3/4	CF 2 3/4 S											Cylindrical				11,720 52,131	16,450 73,170
CF 2 3/4 B	CF 2 3/4 SB	2.750	+0/- .001	1.500	+0 / - .005	1.000	+ .001/-0	2.25	.031	1.125	3.78	30 762	N/A	N/A	N/A		
CCF 2 3/4	CCF 2 3/4 S	69.85	+0/- .03	38.10	+0 / - .13	25.40	+ .03/-0	57.2	.8	28.57	96.0						
CCF 2 3/4 B	CCF 2 3/4 SB																
CFE 2 3/4	CFE 2 3/4 S											Cylindrical				11,720 52,131	16,450 73,170
CFE 2 3/4 B	CFE 2 3/4 SB	2.750	+0/- .001	1.500	+0 / - .005	1.000	+ .001/-0	2.25	.031	1.125	3.78	30 762	.030	1.125	1.375		
CCFE 2 3/4	CCFE 2 3/4 S	69.85	+0/- .03	38.10	+0 / - .13	25.40	+ .03/-0	57.2	.8	28.57	96.0		.76	28.58	34.93		
CCFE 2 3/4 B	CCFE 2 3/4 SB																
CFH 2 3/4	CFH 2 3/4 S											Cylindrical				11,720 52,131	32,900 146,339
CFH 2 3/4 B	CFH 2 3/4 SB	2.750	+0/- .001	1.500	+0 / - .005	1.250	+ .001/-0	2.25	.031	1.125	3.78	30 762	N/A	N/A	N/A		
CCFH 2 3/4	CCFH 2 3/4 S	69.85	+0/- .03	38.10	+0 / - .13	31.75	+ .03/-0	57.2	.8	28.57	96.0						
CCFH 2 3/4 B	CCFH 2 3/4 SB																

Metric dimensions for reference only.
Hex wrench size for "Broached" version is located in the wrench size chart on page B-158.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.

Inch Cam Follower Bearings **MCGILL®**

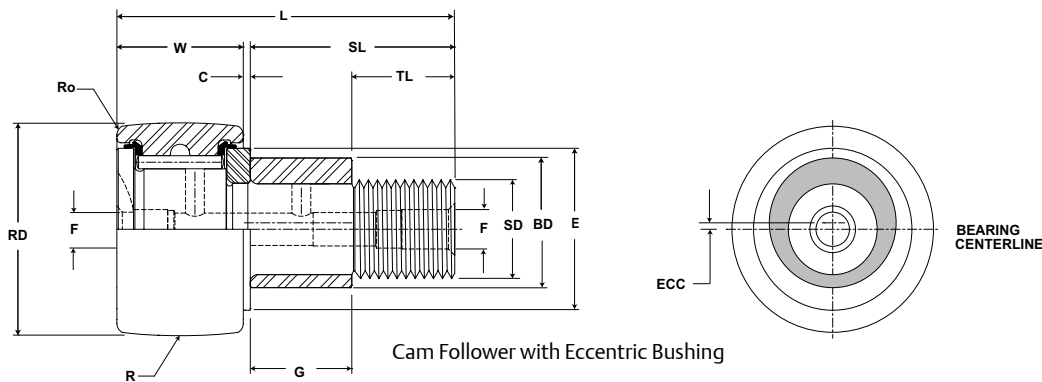

CF, CFE, CFH

Part No.		HC	HD	F	E	Ro	HBD		Thread Type	Clamping Torque	Limiting Speed (Grease)	WT			
W/O Seals	With LUBRI-DISC Seals	Hole Center	Radial Hole Diameter	Axial Hole Dia or Fitting	Min Boss Diameter	Outer Corner	Housing Bore Diameter					Bearing Weight			
		inch mm			inch mm		inch mm			lb kg					
		(Ref)	(Ref)	(Ref)	(Ref)	(Ref)	Nom.	Tol.							
CF 2 1/2	CF 2 1/2 S	.5625 14	.125 3	.1875 5	1.688 42.86	.094 2.38	1.0003 25.408	+.0002/- .0003 +.0005/- .0008	1-14	2,250 254	1,100	2.50 1.13			
CF 2 1/2 B	CF 2 1/2 SB					N/A									
CCF 2 1/2	CCF 2 1/2 S					.5625 14	.125 3	.1875 5					.094 2.38	1.378 35.00	+.001/- .001 +.025/- .025
CCF 2 1/2 B	CCF 2 1/2 SB												N/A		
CFE 2 1/2	CFE 2 1/2 S	.5625 14	.125 3	.1875 5	1.688 42.86								.094 2.38	1.2503 31.758	+.0002/- .0003 +.0005/- .0008
CFE 2 1/2 B	CFE 2 1/2 SB												N/A		
CCFE 2 1/2	CCFE 2 1/2 S					.5625 14	.125 3	.1875 5	1.688 42.86	.094 2.38	1.2503 31.758	+.0002/- .0003 +.0005/- .0008			
CCFE 2 1/2 B	CCFE 2 1/2 SB									N/A					
CFH 2 1/2	CFH 2 1/2 S	.5625 14	.125 3	.1875 5	1.688 42.86					.094 2.38	1.2503 31.758	+.0002/- .0003 +.0005/- .0008			
CFH 2 1/2 B	CFH 2 1/2 SB									N/A					
CCFH 2 1/2	CCFH 2 1/2 S					.5625 14	.125 3	.1875 5	1.688 42.86	.094 2.38	1.0003 25.408	+.0002/- .0003 +.0005/- .0008			
CCFH 2 1/2 B	CCFH 2 1/2 SB									N/A					
CF 2 3/4	CF 2 3/4 S	.5625 14	.125 3	.1875 5	1.688 42.86					.094 2.38	1.0003 25.408	+.0002/- .0003 +.0005/- .0008			
CF 2 3/4 B	CF 2 3/4 SB									N/A					
CCF 2 3/4	CCF 2 3/4 S					.5625 14	.125 3	.1875 5	1.688 42.86	.094 2.38	1.378 35.00	+.001/- .001 +.025/- .025			
CCF 2 3/4 B	CCF 2 3/4 SB									N/A					
CFE 2 3/4	CFE 2 3/4 S	.5625 14	.125 3	.1875 5	1.688 42.86					.094 2.38	1.2503 31.758	+.0002/- .0003 +.0005/- .0008			
CFE 2 3/4 B	CFE 2 3/4 SB									N/A					
CCFE 2 3/4	CCFE 2 3/4 S					.5625 14	.125 3	.1875 5	1.688 42.86	.094 2.38	1.2503 31.758	+.0002/- .0003 +.0005/- .0008			
CCFE 2 3/4 B	CCFE 2 3/4 SB									N/A					
CFH 2 3/4	CFH 2 3/4 S	.5625 14	.125 3	.1875 5	1.688 42.86					.094 2.38	1.2503 31.758	+.0002/- .0003 +.0005/- .0008			
CFH 2 3/4 B	CFH 2 3/4 SB									N/A					
CCFH 2 3/4	CCFH 2 3/4 S					.5625 14	.125 3	.1875 5	1.688 42.86	.094 2.38	1.2503 31.758	+.0002/- .0003 +.0005/- .0008			
CCFH 2 3/4 B	CCFH 2 3/4 SB									N/A					

For positive clamping, use housing thickness equal to G dimension $\approx .010"$.
Clamping torque is based on dry threads. If threads are lubricated, use half of value shown.
Hex wrench size for "Broached" version is located in the wrench size chart on page B-158.