

Product name DC DISCONNECT WITH AUXILIARY AND DOOR MOUNTING KIT

Type DC132 RT 1.5 + OKA/PV 2.P LK6

EAN

Switch-disconnector DC132

Number of poles 1

Terminal size 1,5 - 16 mm²

Terminal torque 1,8 Nm


Auxiliary contact 1 NO

Handle LK6, Polycarbonate, Black

Padlockable

Mechanical endurance 10000 actions (OFF--> ON --> OFF)

Label -

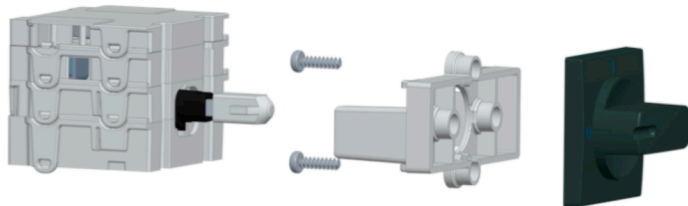

Technical information

IP Code IP20

Ui 1200V

Uimp 8kV

Ithe 32A

Ue 48V DC

DC-23A 32A

Icw 0,8 kA, 1s

Icm 1,128 kA

Test results according to:

IEC/EN 60947_3E

Rated insulation voltage Ui (V)

Rated impulse withstand voltage Uimp (kV)

Conventional enclosed thermal current Ithe (A)

Rated operational voltage Ue (V)

Utilization category, current rating (A)

Rated short-time withstand current Icw (kA)

Rated short-time making capacity Icm (kA)

Standard IEC/EN 60947_3E

RoHS

UL 60947-1; UL 60947-4-1; CSA C22.2 NO. 60947-1-13; CSA C22.2 NO. 60947-4-1-14

