

## Modular Signal Towers / KombiSIGN 72 Siren element 8 tne 115-230VAC BK



Part No.:	645.890.60
Series:	KombiSIGN 71



MECHANICAL DATA	
Height	54 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	93 g
Product weight	74 g

ELECTRICAL DATA	
Operating voltage	115-230V
Operating voltage type	AC
Operating voltage frequency	50Hz at 230V 60Hz at 115V
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	45 mA
Rated inrush current	250 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V


ACUSTICAL DATA	
Volume/dB(max) at 1m distance	102,0 dB (A)
Acoustic signal image	Multi-tone
Number of tones	8 tone
Volume adjustable	Switch
Volume adjustment range	92 - 102 dB (A)
Acoustic service life	5,000 h minimum

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72

**Siren element 8 tne 115-230VAC BK**

**DRAWING**

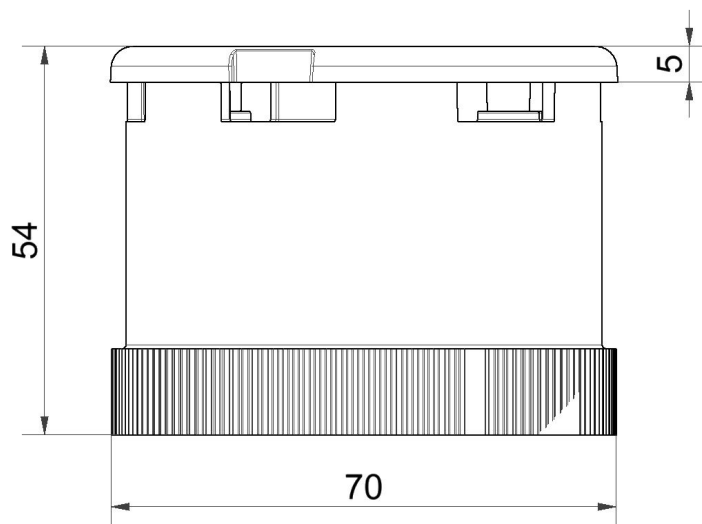

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.