

# LMR<sup>®</sup> Express Assemblies

Two weeks delivery to your door!




### Benefits :

- Corrosion resistant connectors for long life
- IP67 sealed - able to withstand the elements
- Reliable and rugged weather seal boots
- Excellent broadband electrical specs cover a wide variety of applications

## A new program to supply standard LMR assemblies to your door within two weeks of purchase.

These assemblies use our very latest connector designs along with our new WSB weather seal boots. Every one of these assemblies are 100% tested for VSWR and IL, protected with dust caps and individually packaged in labeled poly bags. All assemblies will meet a VSWR of 1.25:1 to 2.5 GHz and a 1.35:1 to 6 GHz, aside from the BNC interface which is limited to 2.5 GHz. The assemblies are labeled as factory made by Times along with a Smart Number and a serial number. The current two-week delivery program encompasses our most popular cables as well as our most popular connectors. Contact your Times Sales Representative for instant pricing.

### Smart Part Number Example:

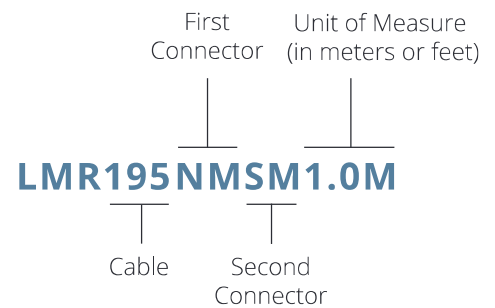

#### Cable

<b>195</b>	=	LMR-195
<b>195DB</b>	=	LMR-195-DB
<b>195FR</b>	=	LMR-195-FR
<b>240</b>	=	LMR-240
<b>240DB</b>	=	LMR-240-DB
<b>240FR</b>	=	LMR-240-FR
<b>400</b>	=	LMR-400
<b>400DB</b>	=	LMR-400-DB
<b>400FR</b>	=	LMR-400-FR

#### LMR-195 Connectors

<b>NM</b>	=	N Male
<b>SM</b>	=	SMA Male
<b>BM</b>	=	BNC Male
<b>TM</b>	=	TNC Male

#### LMR-240 Connectors

<b>NM</b>	=	N Male
<b>SM</b>	=	SMA Male
<b>BM</b>	=	BNC Male
<b>TM</b>	=	TNC Male
<b>QM</b>	=	QMA
<b>NFB</b>	=	N Male Bulkhead
<b>NMR</b>	=	N Male Right Angle
<b>1.0/2.3</b>	=	DIN

#### LMR-400 Connectors

<b>NM</b>	=	N Male
<b>NF</b>	=	N Female
<b>BM</b>	=	BNC Male
<b>TM</b>	=	TNC Male
<b>SM</b>	=	SMA
<b>NFB</b>	=	N Female Bulkhead
<b>NMR</b>	=	N Male Right Angle

Lead-time for all other cable-connector combinations to be determined at time of request

**NOTE: Contact inside sales or your rep for quoting**