


10.0mm Washer Thermocouple, Type K with 2m of Glassfibre stainless steel overbraid

Type K Thermocouple housed in a 10.0mm washer eyelet, Grounded tip for quick response.

Each washer thermocouple has 2m of glassfibre & stainless steel overbraid cable for added protection and mechanical strength.

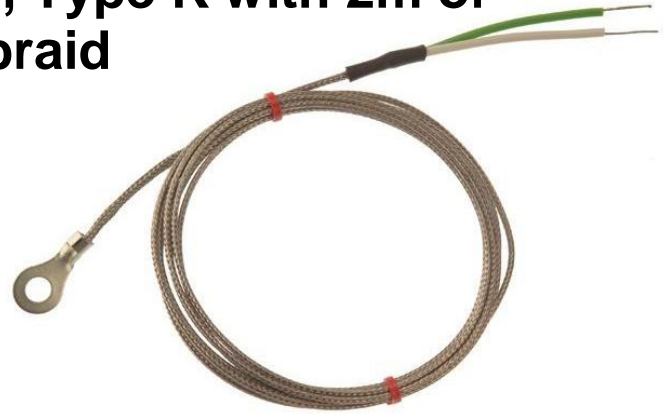

| Specification Table | |
|--------------------------------|---------------------------------------------------------------|
| Sensor Type | Thermocouple housed in a washer eyelet |
| Thermocouple Type | K (Nickel Chromium/Nickel Aluminium) |
| Thermocouple junction | Grounded |
| Tolerance class | 2 |
| Washer size | 10.0mm clearance hole |
| Washer material | Tin plated copper |
| Cable type | Fibreglass insulated flat pair with stainless steel overbraid |
| Conductor wire size | 7/0.2mm |
| Cable length | 2 metres |
| Termination type | Tail wires with stripped ends |
| Colour code (+ Pos) | Green |
| Colour code (-Neg) | White |
| Max. Temperature | +350°C |
| Other | n/a |
| Standards met (colour code) | IEC 60584:3 |
| Standards met (wire tolerance) | IEC 60584:1 |

| Thermocouple Type | Washer Size | RS Order Code |
|-------------------|-------------|---------------|
| K | 10mm | 2000616 |