


D



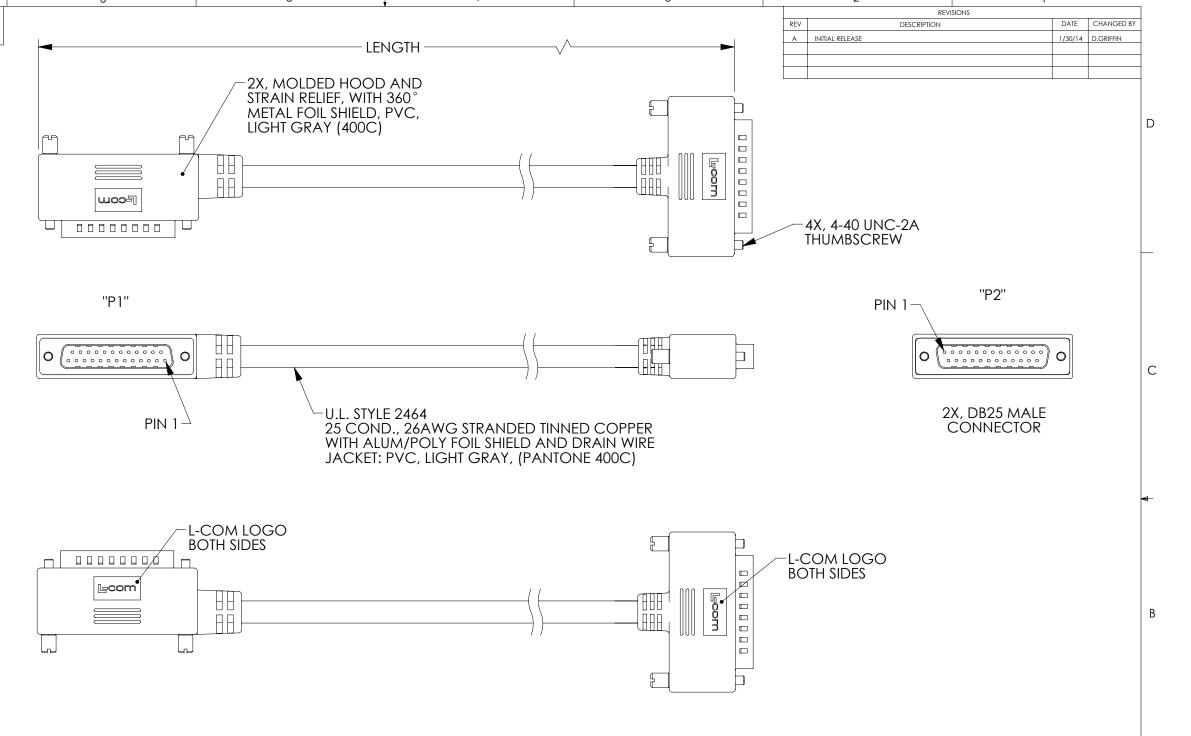

NOTES:

- 1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- 2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

MODEL NUMBER	LENGTH FEET [METERS]
CSMNRA25-2MM-1	1.0 [.31]
CSMNRA25-2MM-2.5	2.5 [.76]
CSMNRA25-2MM-5	5.0 [1.52]
CSMNRA25-2MM-10	10.0 [3.05]
CSMNRA25-2MM-15	15.0 [4.57]
CSMNRA25-2MM-25	25.0 [7.62]

				$\overline{}$		Global 45 BEECH		
UNLESS OTHERWISE SPECIFIED,	APPROVALS	DATE		ارّب	۱۰	Connectivity NORTH A	NDOVER	R, MA
DIMENSIONS ARE IN INCHES [mm]	DRAWN BY					Connectivity	1845	
OVERALL CABLE LENGTH TOLERANCE:	D.FRISIELLO	9/13/13	CATEGORY					
≤12 [305] = +1 [25] / -0 >12 [305] <60 [1524] = +2[51] / -0	CHECKED BY		D-SUBMINIATURE					
>12 [305] <60 [1524] = +2[51] / -0 >60 [1524] <120 [3048] = +4 [102] / -0	R.SCOTT	9/13/13	2 002.7111 113 11.0111					
>120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVED BY	9/13/13	PRODUCT DESCRIPTION					
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08]	S.SMITH			CA DD OCAAAA CTD DA EVIT O				
	CONFIGURATION DETAILS OF		CA DB 25M/M STR-RA EXIT 2					
.XX = ±.02 [.51] .XXX = ± .005 [.13]	UNDIMENSIONEI MAY VA		SIZE	FSC	CM NO.	DWG. NO.		REV.
PROJECTION (T)	COLOR VARIATIONS MAY OCCUR		B 43321		3321	CSMNRA25-2MM		Α
			SCALE: 1:1 CAD FILE: CSMNRA25-2MM.SLDD		E: CSMNRA25-2MM.SLDDRW	SHEET 1 OF 1		