


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/30/13	D.GRIFFIN

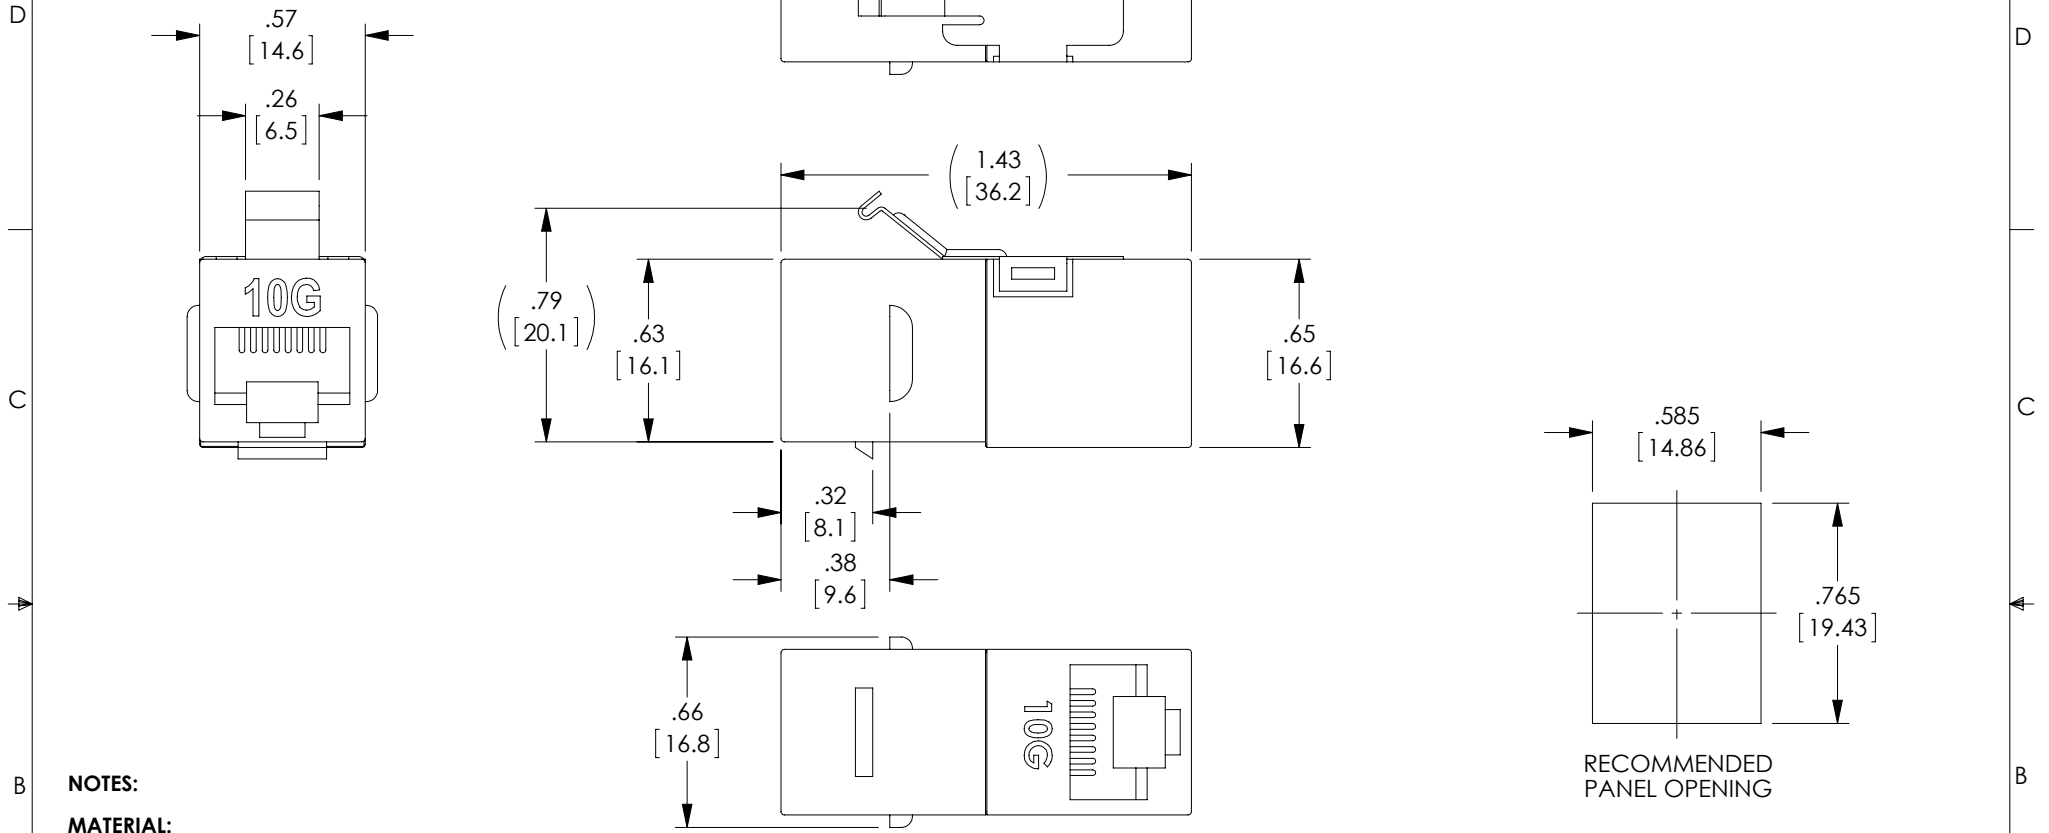

NOTES:

MATERIAL:
 SHIELDED CASE: BRASS, NICKEL PLATED.
 BRACKET: STAINLESS STEEL.
 COUPLER HOUSING: ABS, UL94V-0
 CONTACT HOLDER: ABS, UL94V-0
 JACK CONTACTS: PHOSPHOR BRONZE, 50 μINCHES GOLD PLATE.

ELECTRICAL:
 DC CURRENT RATING: 1.5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.

MISCELLANEOUS:
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C
 APPLICATION: CATEGORY 6.
 WIRING: STRAIGHT THROUGH.
 PANEL THICKNESS: .065" [1.65mm] MAX.
 ALL DIMENSIONS ARE FOR REFERENCE ONLY.

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D. FRISIELLO	10/23/13				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27]	CHECKED BY D. GUITADAURO	10/23/13	CATEGORY TELECOM/MODULAR			
	APPROVED BY D. GALLAGHER	10/23/13	PRODUCT DESCRIPTION C6A SHLD 90° KEYSTONE CPLR			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TDG1026KS-RC6A	REV. A
			SCALE: NONE	CAD FILE: TDG1026KS-RC6A.SLDDRW	SHEET 1 OF 1	