



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 7147: PICTORICALLY CHG'D PLUG, UPDATED PACKAGING, ROHS, FORMAT	11/12/13	D.FRISIELLO



2X, RJ11 PLUG
SHIELDED
(6X6)

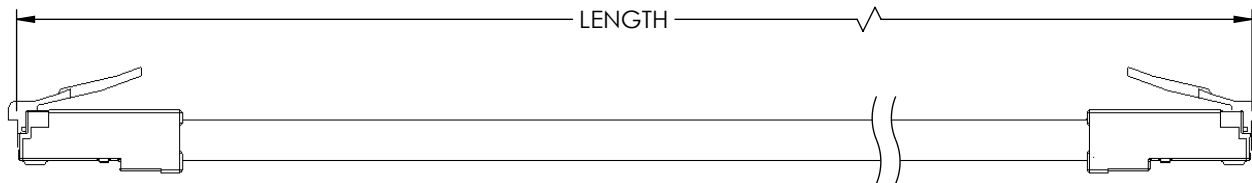

WIRING MAP		
"P1"	COLOR	"P2"
1	----	1
2	WHT / ORN	2
3	BLU	3
4	WHT / BLU	4
5	ORN	5
6	----	6
SHIELD	DRAIN WIRE	SHIELD

NOTES:

MATERIAL:

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
CONTACTS: PHOSPHOR BRONZE
CABLE JACKET: PVC, GRAY (RAL 7044)
SHIELDING: BRASS

FINISH:

CONTACTS: 50 μ INCHES GOLD IN CONTACT AREA
OVER 100 μ INCHES NICKEL PLATE OVERALL.
SHIELDING: NICKEL PLATED

CABLE CHARACTERISTICS:

SHIELDED, ALUMINUM/POLYESTER WITH DRAIN WIRE
TWO TWISTED PAIR MODULAR CABLE, 26 AWG (7X34)
STRANDED COPPER; UL LISTED COMMUNICATIONS CABLE



MISCELLANEOUS:

PLUG CONFORMS TO TIA-1096
OPERATING TEMPERATURE RANGE: -20°C TO +60°C
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

PART NUMBER	LENGTH		PART NUMBER	LENGTH	
	FEET	METERS		FEET	METERS
TRDU45SCR-1	1	0.31	TRDU45SCR-30	30	9.14
TRDU45SCR-2	2	0.61	TRDU45SCR-40	40	12.19
TRDU45SCR-3	3	0.91	TRDU45SCR-50	50	15.24
TRDU45SCR-5	5	1.52	TRDU45SCR-60	60	18.29
TRDU45SCR-7	7	2.13	TRDU45SCR-75	75	22.86
TRDU45SCR-10	10	3.05	TRDU45SCR-80	80	24.38
TRDU45SCR-15	15	4.57	TRDU45SCR-90	90	27.43
TRDU45SCR-20	20	6.1	TRDU45SCR-100	100	30.48
TRDU45SCR-25	25	7.62			

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: X = ± .2 [5.08] XX = ± .02 [51] .XXX = ±.005 [13]	APPROVALS	DATE	 Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		CATEGORY TELECOM/MODULAR	
	DRAWN BY D. PARHAM	1/11/2001				
	CHECKED BY T. CLARK	1/25/2001	PRODUCT DESCRIPTION SHIELDED RJ12 PATCH CORD			
	APPROVED BY ZW	1/25/2001				
<div>PROJECTION</div> 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. TRDU45SCR	REV. F
	COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: TRDU45SCR.SLDDRW	SHEET 1 OF 1	