




Creating Safe Work Solutions During COVID-19

SC-USB2

▶ MECHANICAL SWITCHES

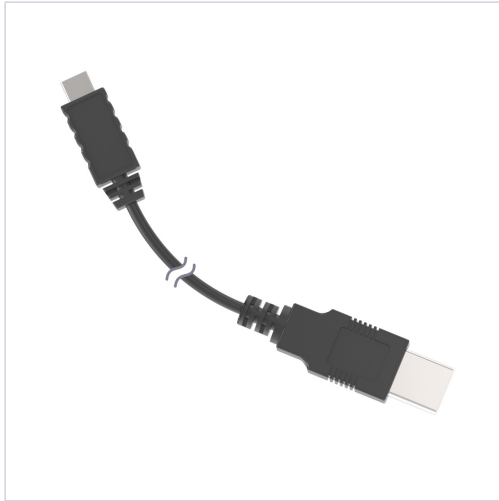

Cable to Connect PC to Safety Controller

Use SC10, SC26 and XS26 Controllers

USB to Micro USB Cable, 6 ft

Part Number: 29480

SPECIFICATIONS

Number of Contacts	9
Number of Connectors	2
Cable Jacket Material	PVC
Cable Jacket Color	Black
Connector Body Material/Color	PUR Black
Outside Cable Diameter (mm)	8
Cordset Length (m)	2
Trunk Length (m)	No Trunk
Shield/No Shield	Shield
Shield Type	Coupling
Coupling Material/Color	Custom


Chat with an Expert

Maximum Temp. (°C)	105
Current Rating (A)	2.0
Minimum Temp. (°C)	-40
Voltage Rating (V)	50 V ac/dc
Primary Connector Type	USB-A
Primary Coupling Method	Friction
Primary Gender	Male
Primary Orientation	Straight
Primary Number of Conductors	4
Primary AWG	28
Secondary Connector Type	USB Micro B
Secondary Coupling Method	Friction
Secondary Gender	Male
Secondary Orientation	Straight
Secondary Number of Conductors	4
Secondary AWG	28
Feature: Hazardous Area	No
Oil/Grease Resistant	No



Banner Engineering Corp. | 9714 Tenth Avenue North | Minneapolis, MN 55441 | United States of America

 Chat with an Expert

 Chat with an Expert