

150 Series In-Line Holders for 2AG or 5x20mm Fuses



**Product Characteristics**

| Compatible Fuses           | 2AG or 5x20mm  |
|----------------------------|--|
| <b>Electrical</b>          | This fuseholder, part number 150274, is intended for use with 2AG and 5 × 20mm fuses. Maximum current ratings are 5 amperes at 350V for the 2AG size fuses and 10 amperes at 350V for the 5 × 20mm size fuses.** |
| <b>Body</b>                | Black Nylon, UL94 V-0  |
| <b>Terminals</b>           | Brass  |
| <b>Wire</b>                | 16 Awg size; Nominal o.d. 0.104"; color Red  |
| <b>Lead Pull Test</b>      | Will withstand 10 lb. pull.  |
| <b>Ambient Temperature</b> | -40°C to +80°C   |

**Notes:**

- \* Refer to [Fuseology](#) for information on proper fuseholder re-rating.
- \*\* If use above 32V, power must be turn off when changing the fuse.

**Agency Approval**

| Agency | Agency File Number |
|--------|--------------------|
|        | E14721             |



**Ordering Information**

| Ordering Number | Packaging            |
|-----------------|----------------------|
| 01500274Z       | Bulk Pack (100 Pcs)  |
| 01500274LXN     | Bulk Pack (50 Pcs)   |
| *01500274ZXU    | Bulk Pack (5000 Pcs) |

**Notes:**

- \* For unassembled Fuseholder, UL Recognition does not apply.
- \*\* Images are illustrative

**Dimensions [mm]**

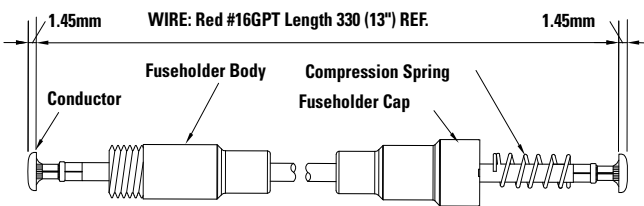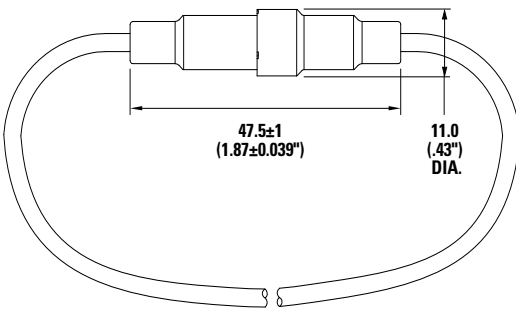

**Warning:** Electrical Shock. Power must be disconnected prior to handling fuse.

**Additional Information**



Datasheet



Resources



Samples