# **PRODUCT INFORMATION PACKET**

## Model No: 056H17F2015 Catalog No: Y363 3/4,1725,TEFC,56C,3/60/575 1000:1 Speed Ratio



Regal and Marathon are trademarks of Regal Beloit Corporation or one of its affiliated companies. ©2018 Regal Beloit Corporation, All Rights Reserved. MC017097E










## **Nameplate Specifications**


Output HP	0.75 Hp	Output KW	0.56 kW
Frequency	60 Hz	Voltage	575 V
Current	1.1 A	Speed	1725 rpm
Service Factor	1	Phase	3
Efficiency	75.5 %	Duty	Continous
Insulation Class	н	Design Code	INV
KVA Code	L	Frame	56C
Enclosure	Totally Enclosed Fan Cooled	Overload Protector	No
Ambient Temperature	40 °C	Drive End Bearing Size	6203
Opp Drive End Bearing Size	6203	UL	Recognized
CSA	Y	CE	Υ

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Duty	Starting Method	Inverter Only
Poles	4	Rotation	Reversible
Mounting	Rigid base	Motor Orientation	Horizontal
Drive End Bearing	Ball	Opp Drive End Bearing	Ball
Frame Material	Rolled Steel	Shaft Type	NEMA 56
Overall Length	11.19 in	Frame Length	6.25 in
Shaft Diameter	0.625 in	Shaft Extension	2.06 in
Assembly/Box Mounting	F3		
Outline Drawing	A-SS75928-625	Connection Diagram	A-EE7300

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created: 07/02/2018

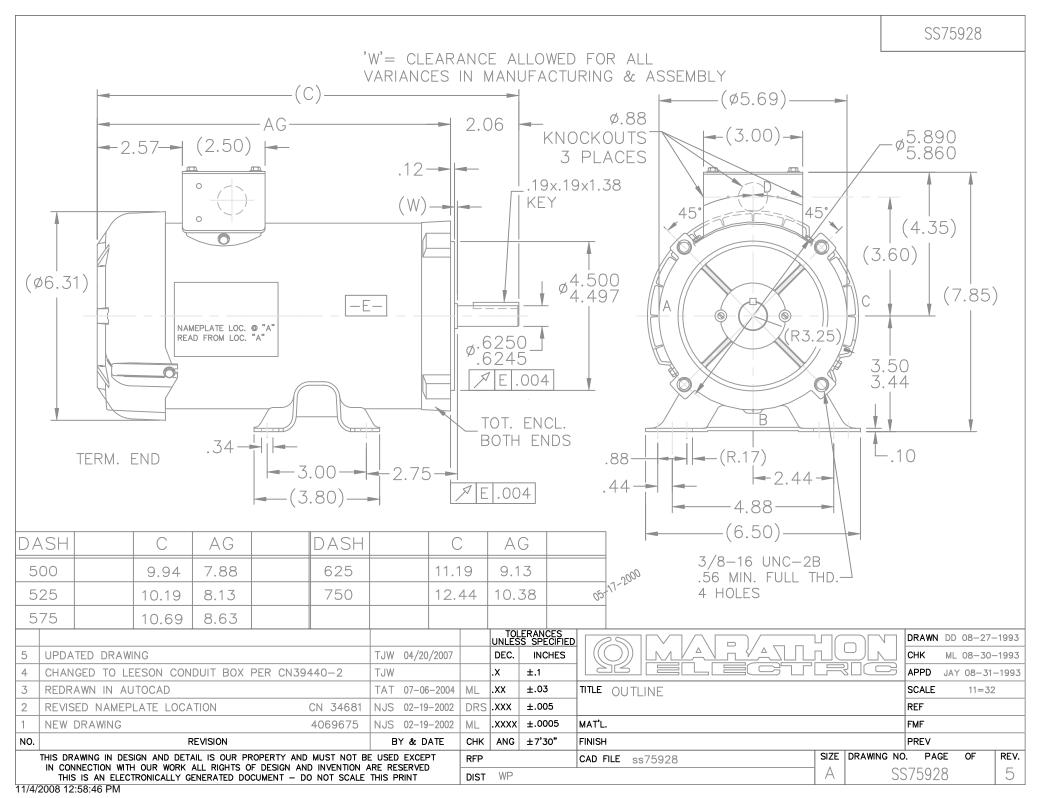

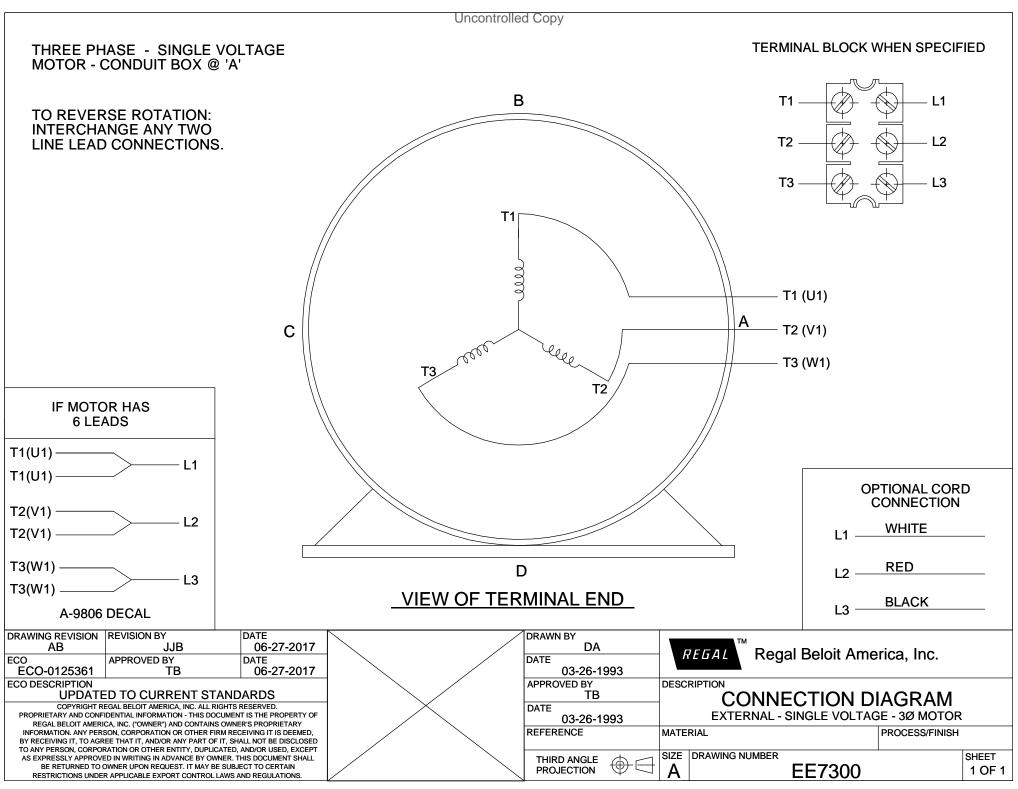

### Uncontrolled Copy

#### CERTIFICATION DATA SHEET

Model#:	56H17F2015 A	WINDING#:	TE48412 R4 5
CONN. DIAGRAM:	A-EE7300	ASSEMBLY:	F3
OUTLINE:	A-SS75928-625		

#### TYPICAL MOTOR PERFORMANCE DATA

HP		ĸw	SYNC. R	РМ	F.L. RPM	FRAME		ENC	LOSURE	KVA (	CODE	DESIGN
3/4		.56	1800		1725	56C		Т	EFC	l	-	INV
РН	Hz	vo	LTS F	L AMPS	START TYPE	DUTY		INSL	s	.F	AMB°C	ELEVATION
3	60	5	75	1.1	INVERTER	CONTINUO	U	H1	1	.0	40	3300
					ONLY	S						
FULL LOAD E	FF: 75.5	3/4 LOAI	D EFF: 73	1/2 L	OAD EFF: 67	GTD.	EFF		ELEC	TYPE	N	O LOAD AMPS
FULL LOAD F	PF: 70.5	3/4 LOA	D PF: 62	1/2 L	OAD PF: 49.5	7	2		SQ CAGE	INV DUTY	JTY .8	
F.L. TO	RQUE	LOC	KED ROTO	R AMPS	L.R. T	DRQUE	7	B.D	. TORQUE		F	.L. RISE°C
2.28 L	B-FT		7.2		8.5 LB-	LB-FT 373 9.5 LB-FT 417			65			
SOUND PRESS @ 3 FT.	SURE	SOUND POW	ER RC	TOR WK	^2 MAX.	WK^2 8	SAFE \$	STALL	ГІМЕ	STARTS /HOUR	;	APPROX. MOTOR WGT
60 dBA		70 dBA	0.0	55 LB-FT	^2 0 LB-	FT^2	0	) SEC.		0		25 LBS.

#### EQUIVALENT WYE CKT.PARAMETERS (OHMS PER PHASE)

R1	R2	X1	X2	ХМ
13.986	12.5874	15.6114	8.316	292.572
RM	ZREF	XR	TD	TD0
10546.2	378	1.37	0.0034	0.063

#### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLACK (POWDER)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	STANDARD 56	NONE	NONE	1144	ROLLED STEEL
6203	6203					STRESSPROOF	
0200						(C-223)	

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

## If Inverter equals NONE, contact factory for further information

	mormation
•	INVERTER TORQUE: CONSTANT 20:1
Ν	INV. HP SPEED RANGE: 2.0 X BASE SPEED
0	ENCODER: NONE
Т	NONE NONE
E	NONE NONE PPR
S	
*	BRAKE: NONE NONE

Uncontrolled Copy

NONE	P/N NONE		
NONE	NONE		
NONE FT-L	B NO	NE V	NONE Hz

DATE: 06/28/2017 12:54:40 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.