

# MODEL 13DVE Rev.A / 15DVE Rev.A HOOK-UP

## WARNING

IMPROPER INSTALLATION OR OPERATION OF THIS CONTROL MAY RESULT IN INJURY TO PERSONNEL OR ELECTRONIC FAILURE. THE CONTROL MUST BE INSTALLED AND GROUNDED IN ACCORDANCE WITH LOCAL, STATE, AND NATIONAL SAFETY CODES. AT NO TIME SHOULD THE CIRCUIT CONTINUITY BE CHECKED BY SHORTING TERMINALS WITH A SCREWDRIVER OR OTHER METAL DEVICE.


## PLEASE READ COMPLETELY BEFORE MAKING ANY ADJUSTMENTS HOOK-UP & TERMINAL IDENTIFICATION

- 1) Before attempting to wire the control, make sure all power is turned off.
- 2) The 15DVE Series controller comes with built-in fusing (250VAC 6.3A, Littlefuse PN 216 06.3 or equivalent) wired in line with AC1.  
**ALL SINGLE PHASE AC SYSTEMS SHOULD HAVE HOT AC CONNECTED TO AC1(L) PIN. FOR 240 VAC SUPPLIES WITH TWO HOT LINES, AN EXTERNAL FUSE WILL NEED TO BE ADDED IN SERIES WITH THE AC2(N) PIN.**  
**CAUTION SHOULD BE USED IN SELECTING THE SIZE OF HOOK-UP WIRING. LIMIT THE VOLTAGE DROP THROUGH THE WIRING TO 5% OF THE LINE VOLTAGE AT FULL LOAD.**
- 3) +ARM: Connect to plus (+) Armature wire on motor:    15DVA's - 0-90 VDC for 120 VAC input, and 0-180 VDC for 240 VAC input.  
                        13DVA's - 0-11 VDC for 12 VAC input, and 0-22 VDC for 24 VAC input
- 4) -ARM: Connect to minus (-) Armature wire on motor.
- 5) AC1 and AC2:    15DVA's - 120/240 VAC - Connect one of the incoming AC lines to AC1 and the other AC line to AC2  
                        13DVA's - 12/24 VAC - Connect one of the incoming AC lines to AC1 and the other AC line to AC2
- 6) +FIELD: Do not use for permanent magnet motor. This supplies +Field voltage for a Shunt Wound Motor. For motors with dual voltage field (ie; 50/100V or 100/200V), make sure the highest value is connected.
- 7) -FIELD: Connect to minus (-) Field wire of Shunt Wound Motor.


**CAUTION: DO NOT ATTEMPT TO PERFORM A HI-POT TEST ACROSS AC LINES WITH CONTROL IN CIRCUIT.  
THIS WILL RESULT IN IMMEDIATE OR LONG TERM DAMAGE TO THE CONTROL.**

## ADJUSTMENTS

- 1) Preset trimpots in the counter-clockwise (CCW) position.
- 2) Apply power and set the power on/off switch to the on position.
- 3) Rotate the Speedpot fully CW and adjust MAX trimpot in the CW direction until the maximum desired speed is obtained.
- 4) Rotate the Speedpot fully counter-clockwise (CCW) and adjust the MIN trimpot in the CW direction until deadband or the minimum desired speed is obtained.
- 5) The IR COMP trimpot is used as a regulation adjustment. If better motor regulation is needed between minimum and maximum loads, then adjust IR COMP trimpot as follows. Rotate the Speedpot CW to the 50% position and rotate the IR COMP trimpot CW as needed to increase regulation.
- 6) Recheck and readjust trimpots if necessary. Trimpot interaction with each other will be minimal.

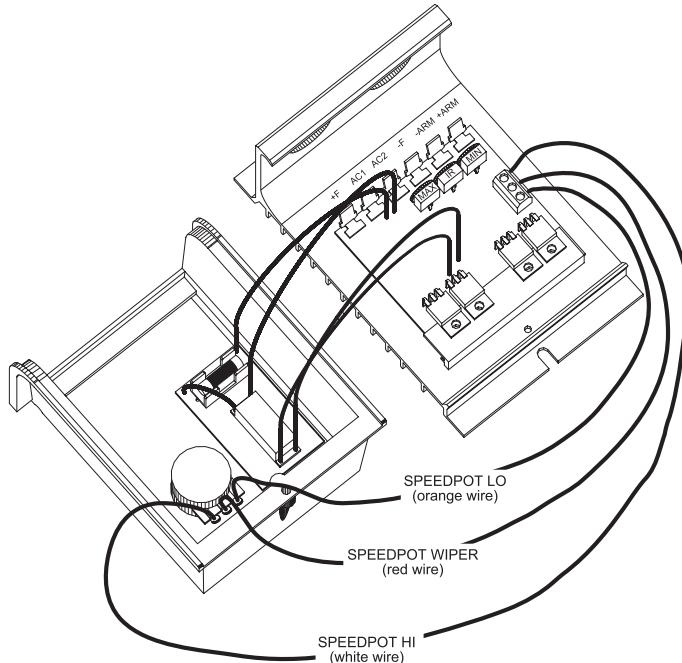

# HEATSINK DIMENSIONS & IDENTIFICATION

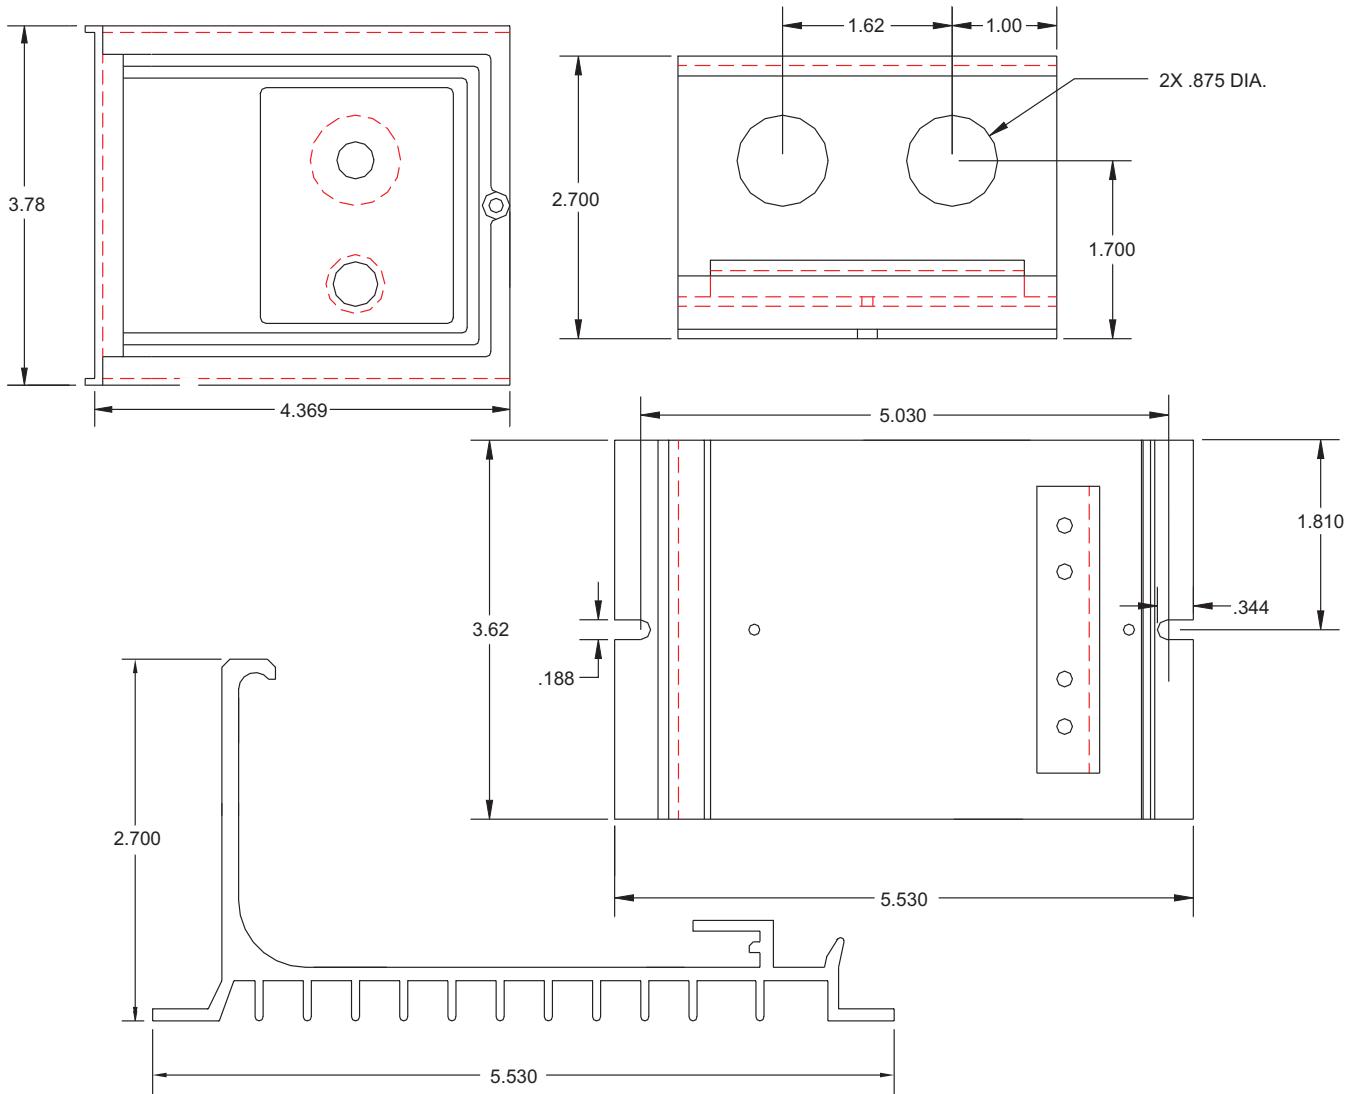

## 13DVE Rev.A /15DVE Rev.A MODEL SPECIFICATIONS

AC Input Voltage .....	$\pm 10\%$ Rated Line Voltage
Input Voltage - 13DVE Rev.A .....	12 VAC or 24 VAC
- 15DVE Rev.A .....	120 VAC or 240 VAC
Amps - DC Output .....	150mA to 3 Amps
Input Frequency .....	50 / 60 Hertz
I.R. Compensation .....	Adjustable - full range
Max. Speed .....	Adjustable (40 - 120% of Base Speed)
Min. Speed .....	Adjustable (0 - 30% of Max)
Output Voltage - 13DVE Rev.A(12 or 24 VAC Input) .....	0-12 or 0-24 VDC
- 15DVE Rev.A(120 or 240 VAC Input) .....	0-105 or 0-210 VDC
Overload Capacity .....	200% for 1 minute
Shunt Field Voltage - 13DVE Rev.A .....	.75 Amp max, 10 VDC at 12 VAC
.....	.75 Amp max, 20 VDC at 24 VAC
- 15DVE Rev.A .....	.75 Amp max, 100 VDC at 120 VAC
.....	.75 Amp max, 200 VDC at 240 VAC
Speed Control .....	5K Ohm Speed Potentiometer
Speed Range .....	25:1
Speed Regulation .....	$\pm 1\%$ of Base Speed
Temperature Range .....	-10° to 40° C. Ambient (15° to 105° F.)
Transient Protection .....	G-Mov
Dimensions .....	13DVE Rev.A / 15DVE Rev.A: 3.78" wide, 5.53" high, 3.49" deep
Weight .....	13DVE Rev.A / 15DVE Rev.A weighs 13.76 oz.