



Datasheet

RS PRO 15cm USB 3.1 Type C Male to USB 3.0 Type A Female Adapter



Stock number: 182-8849

EN

The RS PRO 15cm USB version 3.1 type C male to USB version 3.0 type A female cable has a black PVC jacket and connector hoods. The cable flex has copper wire conductors and drain wire, with an aluminium braid, foil shielding and has an outer diameter of 4.5mm.

The connectors are nickel and have a strain relief to help avoid the cable splitting around the edge of the boot.

USB 3.1 supports 20 volt, 3 amp power delivery, this cable has a 5.1KΩ resistor to prevent too much power getting to a USB 3.0 device.

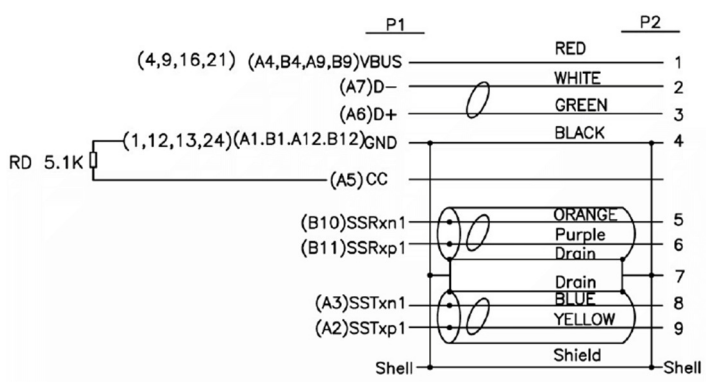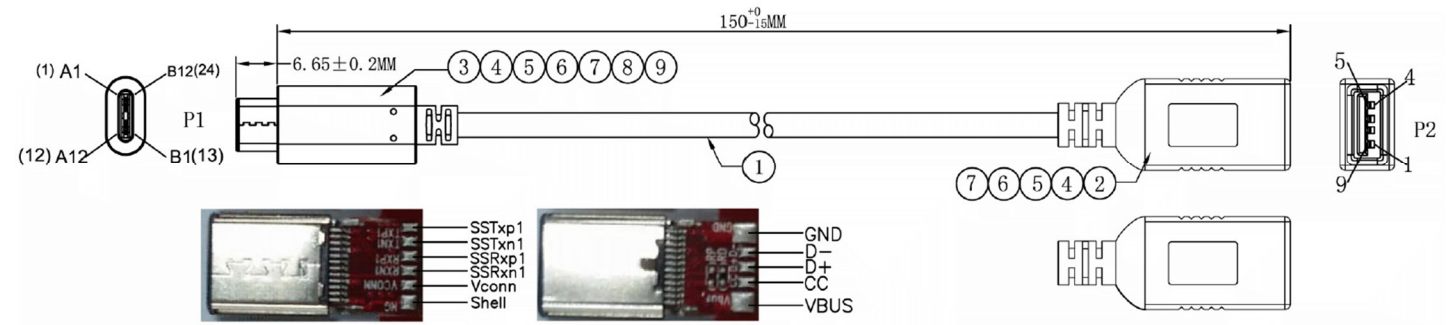

9	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel up ~ (No riveting claw)
8	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel Down~ (No riveting claw)
7	H.S.T φ 1.0 Thin wall
6	H.S.T φ 2.5 Thin wall
5	TRANSPARENT PE ROHS LDPE
4	45P Black PVC ROHS
3	TYPE-C Connector With~EMPTY PCB+SMT (Stick a 5.1 k resistor Used for USB3.0 CM / BM, CM/ Micro BM, CM/AF)
2	USB3.0 (A)F SOLDER TYPE BLUE INSULATION SHELL PLATED:GOLD W/HOOD PLATED:NICKEL
1	USB3.0 UL2725 [30AWG (7/0.10TC)+EAM]*2P+ [30AWG (7/0.10TC)+A]*1P+24AWG (7/0.20TC)*2C+ AEB (16/7/0.12TC 85%TC) OD:4.5MM BLACK NO MARKING

RoHS / REACH / CE