



Datasheet

ENGLISH

RS Unshielded Test Lead Wire 0.75 mm² CSA 500 V Red Silicone Rubber Single Core, 149 Strands 25m

RS Stock number 748-2024



Product Code: Silicone lead wire 0.75mm²

Product Description

Reference Standard

Customer's sample spec.and the general standard

Multi-construction

Single

Cable Construction

Conductor

Tinned Copper

Cross section

0.75mm²

Construction(±0.003mm)

T0.08× 149

Standard Dia.

1.13

Jacket

silicone rubber

Thickness

1.0

Jacket Dia.(mm)

3.30±0.15

Color

Red: Black;

Marking


No Printing

PACKAGING

25M/ Reel

Suitable Reels/Box

Design

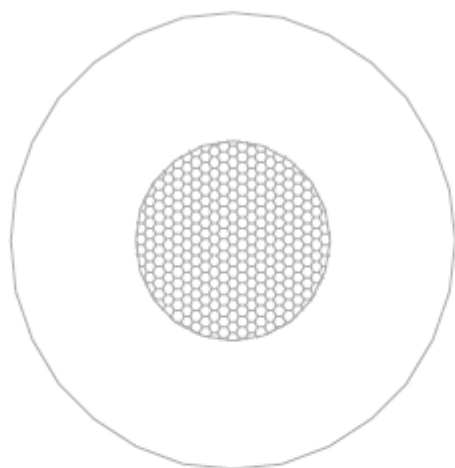

Electrical Characteristics

Max.Conductor DC Resistance at 20°C (Ω /Km)	24.7
Min.Insulation DC Resistance at 20 °C (M Ω *Km)	>500
Rated Temperature(°C)	-55~+200
Rated Voltage (V)	300/500