

Type 3110

Analog Circuit-Card Regulators


Description

The compact Type 3110 (one-loop) and 3120 (two-loop) Circuit-Card Pressure Regulators are perfect for size-conscious OEM's, without sacrificing any of the high-end performance normally associated with full-size I/P's.

Industry-standard analog control signals (0-10V or 4-20 mA) are user-selectable (V or mA) and configurable (zero and span). Industry-standard analog monitor output signal (0-10V) available for user-monitoring of actual output pressure. Industry-standard logic output signals (high or low) are available for user-monitoring of setpoint status – 'at setpoint' or 'still searching'.

Features

- Small Footprint
- User Selectable Input
- Analog Monitor Output
- Single Loop and Dual Loop Control
- Economical

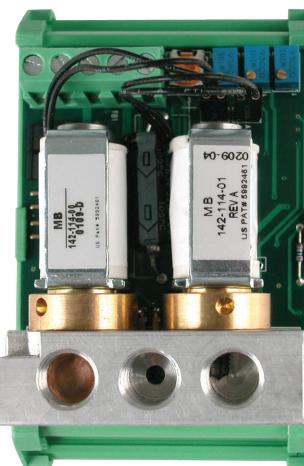

Type 3110

Analog Circuit-Card Regulators

Type 3110	
Performance	Full-Scale Accuracy 0.5%
Electrical Inputs	
Supply Voltage	15-24VDC (12VDC option)
Stand by Supply Current	80 mA
Maximum Supply Current	250 mA
E/P Control	0-10V, 10K OHMS
I/P Control	4-20 mA, 250 OHMS
Electrical Outputs	
Monitor Output	0-10V
Logic Output	TTL
Pneumatic Inputs	
Supply Pressure	Max. Output PSIG (BAR)
	Up to 5 (.35)
	>5 to 15 (.35-1.03)
	>15 to 30 (1.03-2.1)
	>30 to 100 (2.1-6.9)
	>100 to 150 (6.9-10.3)
	>150 to 300 (10.3-20.7)
>300 to 600 (20.7-41.4)	Max. Supply PSIG (BAR)
	650 (44.8)
Pneumatic Outputs	
Full-scale Atmospheric Pressure Ranges	1, 5, 15, 30, 100, 150, 300, 500, 600 psig
	0.07, 0.35, 1.03, 2.07, 6.9, 10.34, 20.68, 34.47, 68.95 BAR
Vacuum Pressure Ranges	30" Hg, 30,150 PSIA (2.1 BAR, 10.3 BAR)
Forward Flow Capacity	1.25 SCFM (35.4 LPM)
Exhaust Flow Capacity	1.25 SCFM (35.4 LPM)
Environmental	
Operating Temperature	32-141°F (0-60°C)
Media-Wetted Materials	Aluminum, copper alloys, nickel, buna-n, silicon, 316SS
Recommended Accessories	Manifold, Power Supply, Control Knob, Remote Pressure Sensor, External Volume Booster