
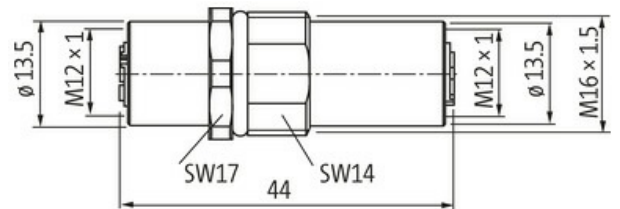


M12 gender-changer female / female D-cod.

Ethernet CAT5
Control cabinet entry system
Female - female
M12, 4-pole
D-coded
shielded



[Link to Product](#)

Illustration

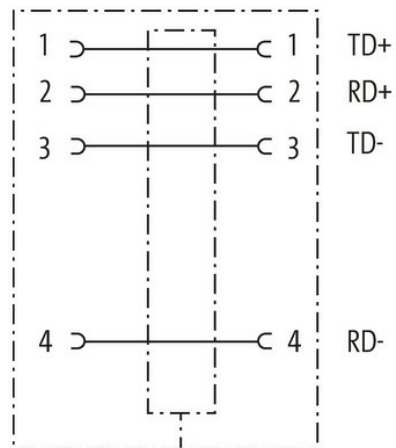

Female

Female



Product may differ from Image

Approvals

Approvals

More Info

**Form**

Form 44611

General data

Temperature range -25...+85 °C

Technical Data

Operating voltage max. 60 V AC/DC

Rated surge voltage 0.8 kV

Operating current per contact max. 4 A

Transfer parameters CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)

Transfer rate up to 100 Mbit/s full duplex

Coding M12, D-coded

Locking of ports Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing

Compression gland M16 (SW19)

Protection IP67 inserted and tightened (EN 60529)

Material Brass, nickel plated

Commercial data

country of origin DE

customs tariff number 85366990

EAN 4048879140928

eClass 27279220

Packaging unit 1.000