

M12 Bu. D-cod. / RJ45 Ethernet adapter 0° 4-pol.

Ethernet CAT5

Control cabinet entry system

Female straight – female straight

M12 – RJ45, 4-pole

D-coded

shielded


suitable for sheet thickness 2.0...5.0 mm

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)


Illustration

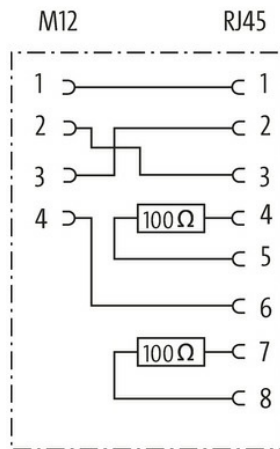



Female



Female



panel cut out



Product may differ from Image

Approvals

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Approvals

More Info



EtherNet/IP

EtherCAT

Form

Form 44671

General data

Temperature range -25...+85 °C

Technical Data

Operating voltage	max. 60 V DC
Operating current per contact	max. 1.76 A
Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	up to 100 Mbit/s full duplex
Coding	M12, D-coded
Protection	IP68 (M12) - IP20 (RJ45)
Material	PUR
Locking material	Brass, chrome plated

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879566896
eClass	27143423
Packaging unit	1.000