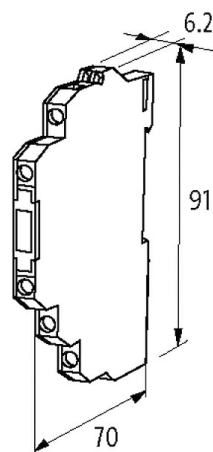
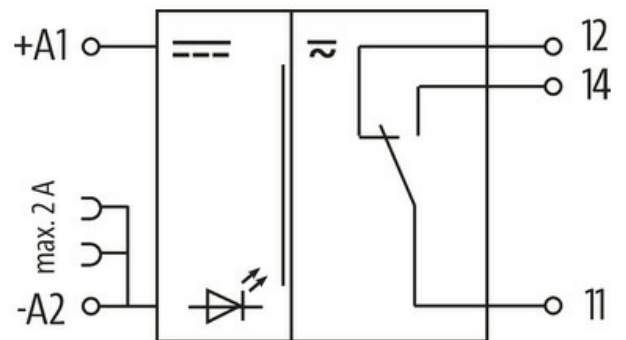




**MIRO 6.2 24VDC-1U OUTPUT RELAY**

IN: 24 VDC - OUT: 250 VAC/DC / 6 A

1 NO/NC contact  
6 A  
24 V DC  
Screw terminals

[Link to Product](#)**Illustration**

115 100 100

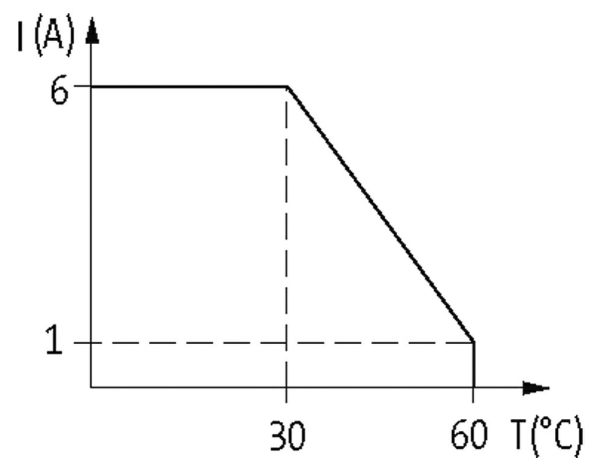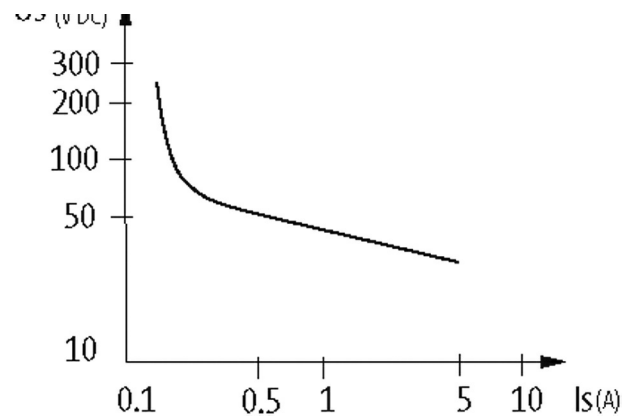

Product may differ from Image

#### Approvals



#### More Info

Bus technologies

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Test isolation voltage	22604
Mech./ elect. life	20 000 000 switching cycles/load dependent
Dimensions H×W×D	91×6.2×70 mm

#### Output

Min. load current	100 mA (12 V DC)
Contact material	Ag Sn O <sub>2</sub>
Energize/release/contact bounce time	10/15/1.5 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 0.1 Hz (with load)
Power rating (voltage dependent)	max. 1500 VA/120 W

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Switching current per output max. 6 A

**Input**

Connection voltage - current 24 V DC (19.2...30 V DC) - 14 mA

LED display LED (green)

**Utilization category**

AC-15 3 A (24/110/230 V AC)

AC-12 6 A (24/110/230 V AC)

DC-13 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

**Commercial data**

country of origin CZ

customs tariff number 85364900

EAN 4048879027311

eClass 27371001

Packaging unit 1.000