

## Datasheet DIN Connector Socket

RS Stock number 811-8222



## **Specifications:**

Connection Type: Voltage: Approvals: Standard: Mounting: Type:


Socket Type: Mounting: Material For Rubber Gasket: Material Body: Gland Size: Body Colours: Contact Resistance (Initial): Current Caring Parts: Permissible Temp. With/Without Load: Rating: Terminals: H. V. Breakdown Test: Insulation Resistance: 3 Pole + Earth 250V AC N.A. N.A. Screw-type MEM -Socket (Micro DIN Connector) -Non-illuminated Type C M2.5 Screw Nitril / Silicon Nylon-6 GF PG-7 Black / Gray 20 m Ohms max. Copper Alloy, Tin plated 0°C to 90°C 6A, 250VAC Screw-type 2 KV AC For 1 Minute . 100 M Ohms min.

## ENGLISH



ENGLISH

## Unit mm

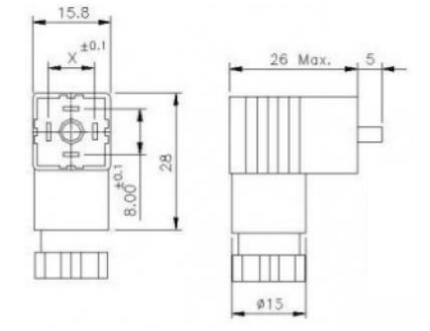

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.