


FEATURES

- Compact and robust, ideal for hard-wearing industrial environments
- High-performance level
- Aesthetically pleasing yellow plate
- Suitable for use in applications where there is a need to disconnect electrical equipment from the circuit
- Disconnect switch can also be used as safety switch
- Performs local isolation, manual override and safety switch function
- The handle is interlocked ensuring removal only if the switch is in "off" position
- The handle is padlockable in the "off" position
- The shaft is hexagonal for rigidity, 8mm across the flats and is supplied at 282mm length
- Maximum panel thickness is 3mm
- All switch ratings at AC22
- 2 rear hole mounting (35mm DIN rail mount)
- Depth behind panel is 355mm

RS PRO Non-Fused Switch Disconnectors

RS Stock No.: 466176

Allied SKU: 70822681

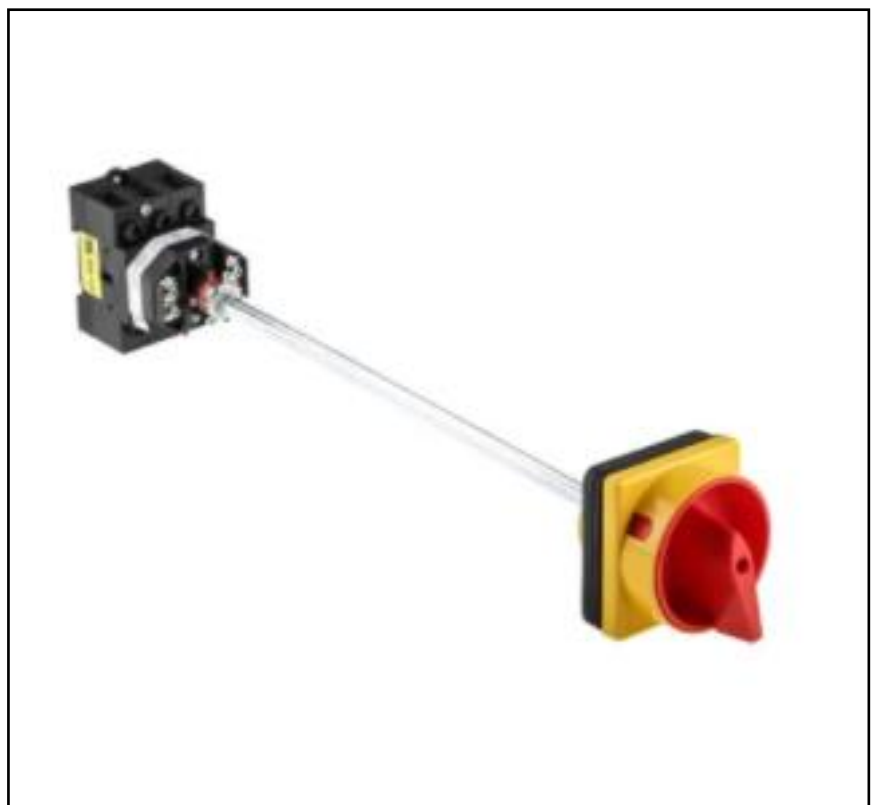

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This Non-fused Isolator Switch from our high-quality own brand RS PRO is designed with strong and durable material that is suitable for a multitude environments. This three-pole version is perfectly suited for manual motor control applications. Super easy to connect and wire as it comes to you undrilled, which enables variable cable entry positions.

General Specifications

Number of Poles	3
Accepts Padlocks	Yes
Handle Type	Handle and shaft included
Handle Colour	Red
Applications	This Non-fused Isolator Switch from our high-quality own brand RS PRO is designed with strong and durable material that is suitable for a multitude environments.

Electrical Specifications

Rated operational voltage Ue IEC &EN	690 V
Rated operational voltage Ue UL	600 V
Rated impulse withstand voltage Uimp	6 kV
Rated uninterrupted current Iu	32 A
Rated operational current Ie AC22A	32 A
Rated operational current Ie AC21A	40 A
Rated operational current Ie AC1	40 A
Rated operational power AC23A (50/60Hz) 230V	15 kW
Rated operational power AC23A (50/60Hz) 415V	18.5 kW
Rated operational power AC23A (50/60Hz) 690V	22 kW
Rated operational power AC3 (50/60Hz) 230V	11 kW
Rated operational power AC3 (50/60Hz) 415V	11 kW
Rated operational power AC3 (50/60Hz) 690V	15 kW
UL power rating 3 phase DOL 110V	3 hp
UL power rating 3 phase DOL 230V	7.5 hp
UL power rating 3 phase DOL 480V	20 hp
UL power rating 3 phase DOL 600V	25 hp
UL power rating 1 phase DOL 110V	2 hp
UL power rating 1 phase DOL 230V	3 hp
UL short circuit fuse rating class J	45 A
UL rated fused short circuit current	10 kA
IEC short circuit capacity max fuse size GI	32 A
IEC rated fused short circuit current	30 kA
Maximum terminal capacity	10 mm ²

Mechanical Specifications

Mounting Type	DIN rail mount
Length/ Height	87mm
Width	68mm
Depth	56mm
Handle Length	64 mm
Handle Width	64 mm
Handle Depth	42 mm
Shaft Length	282 mm
Shaft Weight	0.265 Kg
Recommended Tightening Torque	1.7Nm

Protection Category

IP Rating	IP65
-----------	------

Approvals

Compliance/Certifications	CB, CE, SEMKO; ANSI/UL 508
Declarations	Statement of conformity

Similar Products

Parameters	Stock#773-7960	Stock#773-8002	Stock#773-8018	Stock#773-8008
Brand	RS RPO	RS RPO	RS RPO	RS RPO
Number of Poles	4	3	3	4
Accepts Padlocks	Yes	Yes	Yes	Yes
Auxiliary Contacts Available		Yes	Yes	Yes
Electrical Phase	3	3	3	3
Maximum Current	25A	25A	63A	63A
Rated Operational Current Ie AC21A	25A	25A	63A	63A
Voltage Rating	690V ac	690V ac	690V ac	690V ac
Rated Operational Power AC23A 440V	11 kW (400V)	11 kW (380-440V)	18.5 kW (440V)	30 kW (380-440V)
Power Rating	11 kW	11 kW	18.5kW	30kW

Non-Fused Switch Disconnectors



Switch Rating	5kA	5kA	30kA	30kA
Maximum gL Fuse Size IEC	20A	20A	63A	63A
Rated Fused Short Circuit Capacity IEC	5kA	5kA	30kA	30kA
Maximum Cable Capacity		6mm ²	10mm ²	10mm ²
Mounting Type	Panel Mount	Panel Mount	Panel Mount	Panel Mount
Length	175mm	220mm	220mm	220mm
Width	125mm	145mm	145mm	145mm
Depth	90mm	90mm	90mm	90mm
Depth Including Switch	134mm	134mm	134mm	134mm
Recommended Tightening Torque	1.7Nm	1.7Nm	2Nm	2Nm
IP Rating	IP65	IP54	IP54	IP65
Compliance/Certifications	UL 508, EN60947,	EN60947	UL 508	UL 508, EN60947
Normal Operating Temperature	-25°C to +40°C	-25°C to +40°C	-25°C to +40°C	-25°C to +40°C
Applications	<ul style="list-style-type: none"> • Non-inductive or slightly inductive loads, resistance furnaces • Squirrel - cage motors: starting, switching off motors during running • Control of AC electromagnetic loads • Switching of resistive loads, including moderate overloads • Switching of motor loads or other highly inductive loads • Switching of mixed resistive and inductive loads 	<ul style="list-style-type: none"> • Non-inductive or slightly inductive loads, resistance furnaces • Squirrel - cage motors: starting, switching off motors during running • Control of AC electromagnetic loads • Switching of resistive loads, including moderate overloads • Switching of motor loads or other highly inductive loads • Switching of mixed resistive and inductive loads 	<ul style="list-style-type: none"> Non-inductive or slightly inductive loads, resistance furnaces, Squirrel - cage motors, Control of AC electromagnetic loads 	<ul style="list-style-type: none"> • Non-inductive or slightly inductive loads, resistance furnaces • Squirrel - cage motors: starting, switching off motors during running • AC Control electromagnetic loads • Switching of resistive loads, including moderate overloads • Switching of motor loads or other highly inductive loads • Switching of mixed resistive and inductive loads