




Floating Joints - NJ Series


Reduce Effects of Side Load due to Misalignment

- Align deflected loads for longer cylinder life
- High level of machining accuracy is unnecessary
- Increased range for concentric misalignment
- Compact design suitable for high tensile stresses
- Spherical rotation operating range $\pm 5^\circ$

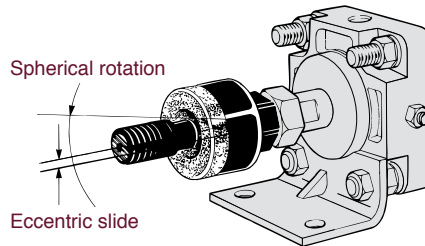

REDUCE

- Sideloading
- Misalignment
- Uneven Wear
- Piston Seal Leakage
- Inconsistent Travel Speed
- Internal Cylinder Damage

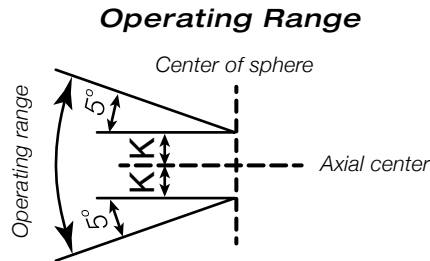


BENEFITS


- Decrease Maintenance Time
- Save Installation Time
- Aid Effective and Efficient Production
- Reduce Air Leaks
- Reduce Replacement Cylinder Costs



Compatible Cylinders

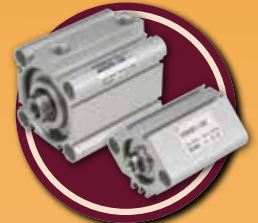

NCQ2

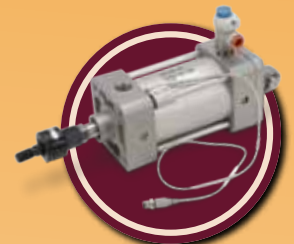

NCA1



NCM



NCG

NF283-B

Related Products

Metric Threads



JC Lightweight Male Threads





JA Standard Male Threads



JS Stainless Steel Male Threads

Dimensional Information

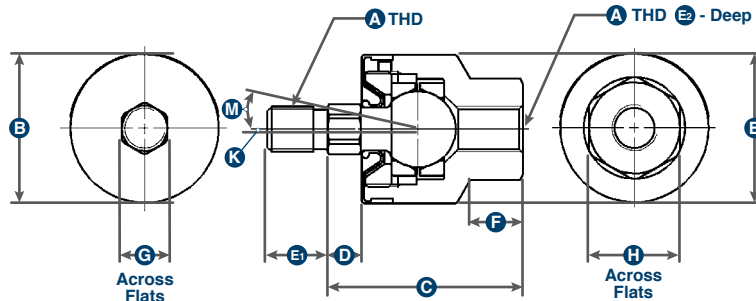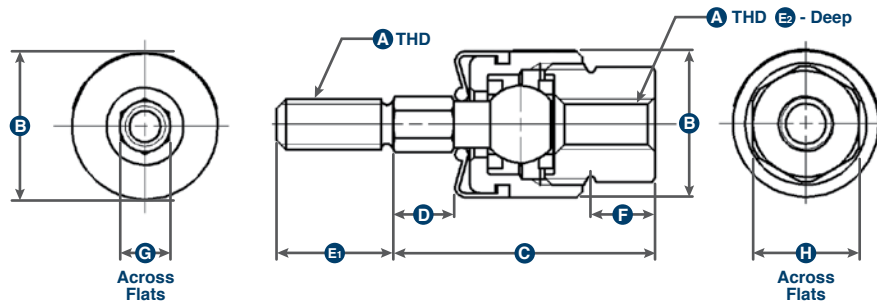

NJ5-40 6-40 8-32 10-32

NJ04 to NJ12

Model	A	Cylinder Max Pressure	Working Thrust (lbs)	B	C	D	E1	E2	F	G	H	K	M
NJ5-40	No.5-40 UNC	100 PSI (7 kgf/cm ²)	110	0.47	0.82	0.22	0.38	0.27	0.21	0.31	0.31	0.02	5°
NJ6-40	No.6-40 UNF		140	0.47	0.85	0.22	0.38	0.3	0.21	0.15	0.34	0.02	
NJ8-32	No.8-32 UNF		175	0.47	0.85	0.22	0.38	0.3	0.21	0.15	0.34	0.02	
NJ10-32	No.10-32 UNF	250	0.63	1.16	0.23	0.63	0.5	0.22	0.38	0.38	0.02		
NJ04	1/4-28 UNF	150 PSI (9.9kgf/cm ²)	760	0.94	1.38	0.25	0.5	0.41	0.31	0.56	0.03		
NJ05	5/16-24 UNF		1200	1.22	1.61	0.28	0.5	0.43	0.38	0.75	0.03		
NJ06	3/8-24 UNF		2500	1.22	1.83	0.31	0.75	0.63	0.44	0.75	0.03		
NJ07	7/16-20 UNF		2600	1.61	2.11	0.31	0.75	0.63	0.5	1	0.06		
NJ08	1/2-20 UNF		3500	1.61	2.18	0.39	0.74	0.75	0.63	0.62	1	0.06	
NJ10	5/8-18 UNF		6200	1.97	2.91	0.5	1.13	0.94	0.81	1.13	0.06		
NJ12	3/4-16 UNF		8500	1.97	2.91	0.5	1.13	0.94	0.81	1.13	0.06		

Care & Maintenance

- For applications other than air cylinder consult factory.
- Joint is not suitable for rotation applications.
- Do not reuse if disassembled.
- NJ floating joints are sealed and pre-lubricated.
- Ambient temperature range 40° to 140°F (5° to 60°C).
- Do not exceed an axial misalignment of 5°.
- Do not exceed an allowable eccentricity or the life of the joint could be shortened.
- For installation tighten completely and loosen 1 to 2 turns.

For CAD models: www.smcusa.com/CAD Actuator Accessories>Floating Joint



SMC Corporation of America
10100 SMC Blvd.
Noblesville, IN 46060
www.smcusa.com

(800) SMC.SMC1
(800 - 762 - 7621)

SMC Pneumatics (Canada) Ltd.
www.smc Pneumatics.ca

e-mail: sales@smcusa.com
For International inquires:
www.smcworld.com

All reasonable efforts to ensure the accuracy of the information detailed in this flyer were made at the time of publishing. However, SMC can in no way warrant the information herein contained as specifications are subject to change without notice.