


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAX BUNDLE DIAMETER	"L" LENGTH ±.3" [7]
MLTC2H-LP316	2" [51]	7.9" [201]
MLTC2.7H-LP316	2.7" [69]	10.15" [258]
MLTC4H-LP316	4" [102]	14.3" [362]
MLTC6H-LP316	6" [152]	20.5" [521]
MLTC8H-LP316	8" [203]	26.8" [679]
MLTC10H-LP316	10" [254]	33.0" [838]

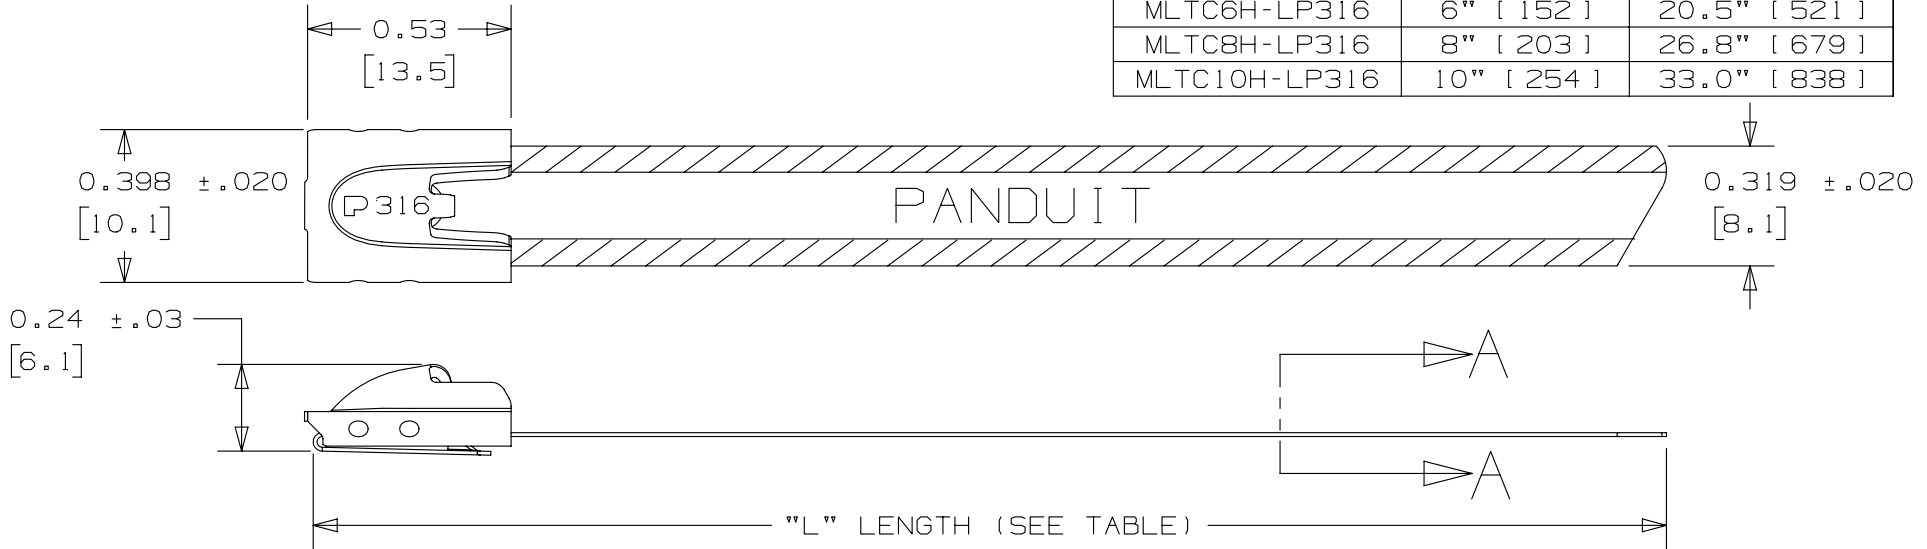

- NOTES:
- APPLICATION TOOLS - GS4MT, PPTMT, HTMT, & ST3MT
 - MINIMUM LOOP TENSILE STRENGTH - 250 lbs. [1112 NEWTONS]
 - BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 - TOLERANCES:
 .X = ±.030 [.8] .XX = ±.020 [.5]
 .XXX = ±.010 [.25]
 - MATERIAL: 316 STAINLESS STEEL
 - COATING: NYLON 11
 COATING THICKNESS: .003" / .005" [0.08-0.13] PER SIDE

316 STAINLESS STEEL (.010 REF)
 NYLON 11 COATING
 0.018 ±0.002
 [0.5 ±0.1]
 SECTION A-A
 SCALE 4:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL:	DRAWING NUMBER:
							SELECTIVELY COATED METAL LOCKING TIE HEAVY SERIES WITH NYLON 11 COATED BODY	N41140BS/08	N41140BS_DC/08A	SEE NOTES	N41140BS_DC
08A	7/14	JHNU	SKB	RGB	ADDED .010 REF TO SECTION A-A ADDED THICKNESS DIMENSION TO SECTION A-A	SSECN01155	CUSTOMER DRAWING				
07A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01042					
06A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				
							.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °				
							THIRD ANGLE PROJECTION				
							DRAWN BY/DATE JAMB 2/12	CHK DPN	SCALE 2:1	SHT 1 OF 1	SIZE A