


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2119420002](#)
Status: **Active**
Overview: Coeur CST High-Current Interconnect System
Description: PowerWize 6.00mm Receptacle Crimp Housing, Dual Row, 2 Circuits, Keying Option A, Red

Documents:

| | |
|---|---|
| 3D Model | Application Specification 2119410000-AS-000 (PDF) |
| 3D Model (PDF) | Packaging Specification 2119420000-PK-000 (PDF) |
| Drawing (PDF) | Test Summary 2119410000-TS-000 (PDF) |
| Product Specification 2119410000-PS-000 (PDF) | RoHS Certificate of Compliance (PDF) |

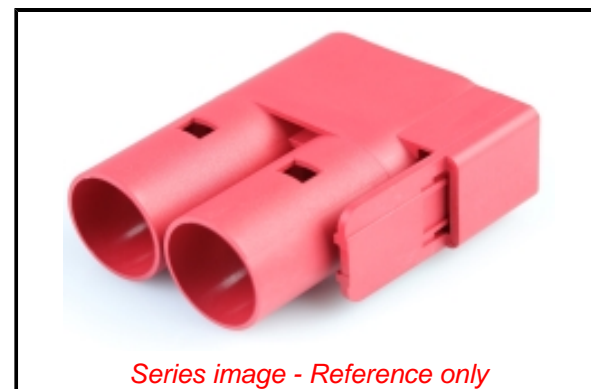

General

| | |
|----------------|--|
| Product Family | Crimp Housings |
| Series | 211942 |
| Application | Power, Wire-to-Board |
| Diameter | 6.00mm |
| Overview | Coeur CST High-Current Interconnect System |
| Product Name | Coeur CST, PowerWize |
| UPC | 191130961375 |

Physical

| | |
|-------------------------------|----------------|
| Circuits (maximum) | 2 |
| Color - Resin | Red |
| Gender | Receptacle |
| Glow-Wire Capable | No |
| Keying to Mating Part | Yes |
| Lock to Mating Part | Yes |
| Material - Resin | Polyester |
| Net Weight | 18.323/g |
| Number of Rows | 2 |
| Packaging Type | Bag |
| Panel Mount | N/A |
| Pitch - Mating Interface | 19.06mm |
| Polarized to Mating Part | Yes |
| Temperature Range - Operating | -40° to +105°C |

Material Info

Reference - Drawing Numbers

| | |
|---------------------------|-------------------|
| Application Specification | 2119410000-AS-000 |
| Packaging Specification | 2119420000-PK-000 |
| Product Specification | 2119410000-PS-000 |
| Sales Drawing | 2119420000-SD-000 |
| Test Summary | 2119410000-TS-000 |

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[211942](#) Series

Mates With

6.00mm Male Header [211937](#)

Use With

6.00mm Female Crimp Socket [204608](#)

 6.00mm Terminal Retention Housing
[211888](#)