

Straight Blade Devices  
 16A, 250V AC, 2 Pole, 3 Wire Grounding  
 Receptacle IEC 320 Compatible

# HUBBELL

## Features

- Compatible with IEC320
- Low profile
- Impact resistant
- Ring Terminal

## Ordering Information

Description	Device Color	UPC	Catalog Number
IEC Configuration compatible straight blade panel mount receptacle	Black	783585777016	H320RRT



## Listings

UL Recognized  
 CSA certified 20A 250V AC-File No. 17337

## Specifications

Device Type	2 Pole + earth
Housing	Nylon
Terminal Retainer	Nylon
Power Contacts	.032" (.81) Brass
Terminal Screws	Stainless steel
Terminal Clamp	Nickel plated steel
Assembly Screws	Zinc plated steel

## Performance

### Electrical


Dielectric Voltage	Withstands 2,000V minimum
Rating	16A 250V AC for European service; 20A 250V AC for North American service

### Mechanical

Terminal Accommodation	North American – #16-12 AWG stranded or solid copper conductor only. International – 1.55mm <sup>2</sup> -2.5mm <sup>2</sup>
Terminal Identification	Terminals identified in accordance with UL 498 and CSA

### Environmental

Flammability	UL 94 V0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

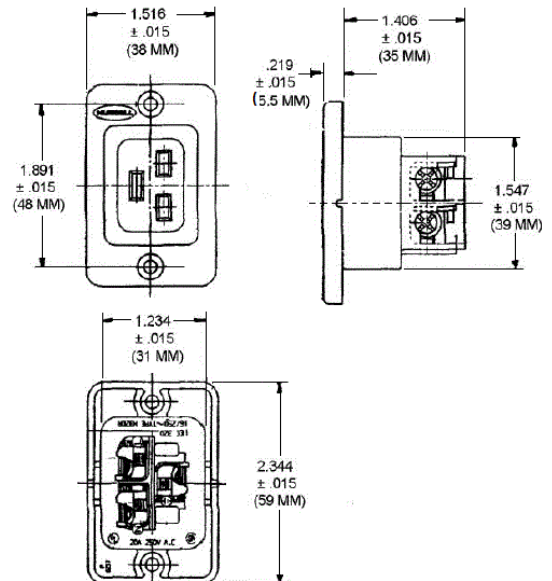

## Resources

Customer Use Drawing  
 eCatalog