




Representative

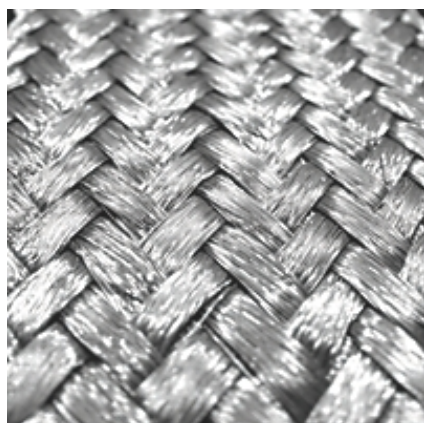

Representative

Catalog Number: FB2D18
Product ID: 7TAA014910R0008
UPC Number: 78378646681
Status: A

Tinned Copper Flexible Braid Connector for Grounding, 18 inch length x 1-1/4 inch wide x 1/4 inch thick, Number of Braids in Assembly 2 - 1 Across and 2 Layers Thick. Pad 1-1/4 inch wide x 2-1/2 inch long with (2) 7/16 inch Diameter holes on 1-1/4 inch Center to Center Spacing. 153600 Circular Mil Area, Bolt Holes 7/16. CSA and UL Certified.

- Flexible Copper Braid for Use in Substation and Grounding Applications.
- Enables Linear Expansion, Equipment Vibration and Offset Connections.
- Certified C22.2 No. 41 Grounding and Bonding Equipment
- Listed UL467 and UL486A Grounding & Bonding Equipment

North American Specifications (UNSPSC)

UNSPSC	39121465 Flexible braid
IGCC	4695 Flexible braid
Type	Flexible Braid Connector - 2-Hole
Special Features	Tin-Plated Copper Braids and Ferrules for High Conductivity and Corrosion Resistance. Enables Linear Expansion, Equipment Vibration and Offset Connections.
Application	Flexible Copper Braids for use in Substation and Grounding Applications
Standard	UL E3060, CSA LR29625
Conductor Material	Tin-Plated Copper
Cable Width	1.25 in
Cable Length	18 in
Conductor Category	Flexible
Shape Of Conductor	Flat

European Specifications (ETIM)

ETIM	EC000839 Braid wire
Conductor material	Cu, tinned
Conductor category	Class 5 = flexible
Shape of conductor	Flat
Cable height approx.	458mm

Packaging

Outer Quantity	1
Outer Dimensions (inches)	18.25x1.25x.25
Weight Uom	1 lbs. Each

Documents / Support Tools

Catalog Page	Available on Website
Catalog	Available on Website

For further technical assistance, please contact us...

ABB Installation Products - USA
 860 Ridge Lake Blvd.
 Memphis, TN 38120
 www.tnb.com

ABB Installation Products Technical Support
 MS 3B-50
 860 Ridge Lake Blvd.
 Memphis, TN 38120

Hours: 7AM - 6PM CDT
 Monday-Friday
 Phone: (888) 862-3289
 Fax: (901) 252-1321
 Email:techsupport@tnb.com