


BANNER'S CALL FOR PARTS CREATES A STEADY WORKFLOW AND PINPOINTS CRITICAL ISSUES. LEARN MORE.



## WLS15XDW0220DSC2

### ▶ WLS15 LOW PROFILE, LOW POWER LED STRIP LIGHT

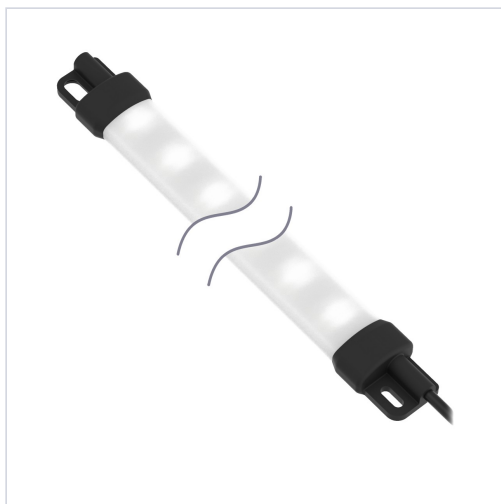

WLS15 Work Light Strip; Diffused Window; Length: 220 mm

Voltage: 12 or 24 V dc; Environmental Rating: IP66,67

Color: Daylight White

2 m (6.5 ft) Cable


Part Number: 802025

#### CERTIFICATIONS



### ACCESSORIES TO COMPLETE YOUR SYSTEM

Add all or individual items to your cart. More options available below.

|   |   |
|---|---|
|  | <p><b>LC15T-127AP2RBGQP</b></p> <p>LC15T Light Controller; 3-Color Touch Sensor<br/>         Voltage: 10-30 V dc; 4 Amps; Environmental Rating: IP66, IP67<br/>         Colors: Red Blue Green; 2-Wire PWM Control<br/>         Euro 4-Pin Male-Female 150 mm (6 in) PVC Pigtails</p> |
|---|---|

#### SPECIFICATIONS

 Chat with an Expert

|  |   |
|--|---|
| <b>Cable Length (m)</b>                            | 0.15  |
| <b>Power</b>                                       | DC  |
| <b>Power Source</b>                                | DC  |
| <b>Housing Style</b>                               | Linear Strip  |
| <b>Primary Housing Material</b>                    | Polycarbonate   |
| <b>Illumination</b>                                | Yes   |
| <b>Mounting Thread</b>                             | No Thread   |
| <b>Color Input Control</b>                         | Individual (One wire/color, same number of colors as input wires) |
| <b>Number of Colors / Segments</b>                 | 1   |
| <b>Product Size (mm)</b>                           | 15  |
| <b>Color Technology</b>                            | Standard LED  |
| <b>Color Option 1</b>                              | White   |
| <b>Connection</b>                                  | Cable   |
| <b>Lumens Color 1</b>                              | 175   |
| <b>Color 1 - Wavelength/Color Temp/Coordinates</b> | 5000K (Daylight)  |
| <b>Max Current Color (mA)</b>                      | 240   |
| <b>Dimming Option</b>                              | PWM   |
| <b>Number of Input Pins/Conductors</b>             | 2   |
| <b>Supply Voltage</b>                              | 12/24 V dc  |
| <b>Illuminated Length (LxWxH mm)</b>               | 146.4   |
| <b>Physical Dimensions (LxWxH or DxH mm)</b>       | 220.0 x 30.6 x 15.5   |
| <b>Environmental Rating</b>                        | IP66; IP67  |
| <b>Max Op. Temperature (°C)</b>                    | 60  |
| <b>Min Op. Temperature (°C)</b>                    | -40   |
| <b>Storage Temp (°C)</b>                           | -40 to 70   |
| <b>Primary Window Material</b>                     | Polycarbonate Diffused  |


[Chat with an Expert](#)

|   |           |
|---|-----------|
| <b>Secondary Material</b>               | Polyamide |
| <b>Feature: Hazardous Area</b>          | No        |
| <b>Feature: Audible</b>                 | No        |
| <b>Feature: Chemical Resistant</b>      | No        |
| <b>Feature: Quick Disconnect</b>        | No        |
| <b>IO Link</b>                          | No        |
| <b>Modbus RTU</b>                       | No        |
| <b>Wireless</b>                         | No        |
| <b>Pro-Editor Compatible (Discrete)</b> | No        |

## COMPATIBLE PRODUCTS

### BRACKET

|  |  |
|--|--|
|  | <p><b>LMBWLS15</b></p> <p>Bracket: For Use with WLS15<br/>Mounting Clip Kit<br/>Contains 3 Brackets</p>                    |
|  | <p><b>LMBWLS15-150S</b></p> <p>Bracket: For Use with WLS15<br/>150 Degree Rotation<br/>Set of Two<br/>Stainless Steel</p>  |
|  | <p><b>LMBWLS15MAG</b></p> <p>Bracket: For Use with WLS15<br/>Magnetic Mounting Kit<br/>Set of Two<br/>Up to 16 lb Pull</p> |

### MECHANICAL SWITCHES

**LC65P2T**

LED Dimmer Module; 2 -Wire  
Pulse Width Modulation  
12-30 V dc; 4 Amps  
Terminal Connection

**MISCELLANEOUS****LMBWLS15TD**

Two strips of 3M Dual Lock adhesive

**LMBWLS15TF**

Two strips of double sided foam urethane tape

**PSD-24-4**

DC Power Supply - Desktop Style  
Input: 90-264 V ac 50/60 Hz: 1.8 m (6 ft) US Style outlet plug  
Output: 24 V dc 4 A: 2 m (6.5 ft) Euro 4-pin Connector  
UL Listed Class 2



Banner Engineering Corp. | 9714 Tenth Avenue North | Minneapolis, MN 55441 | United States of America

 Chat with an Expert