



Datasheet

SP Lever Microswitch, 2 A@ 250 V ac

RS Stock 804-6262

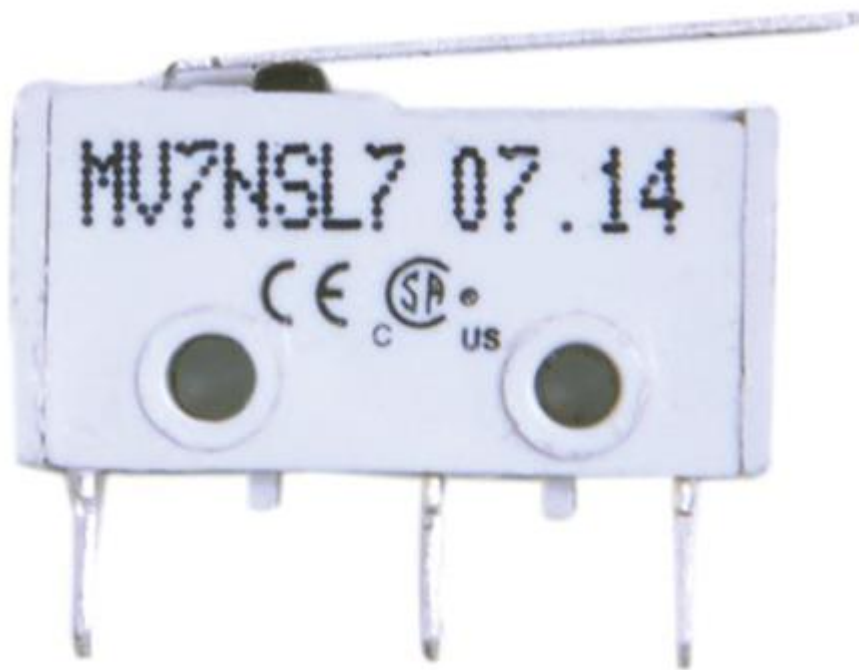

Dimensions: (mm)

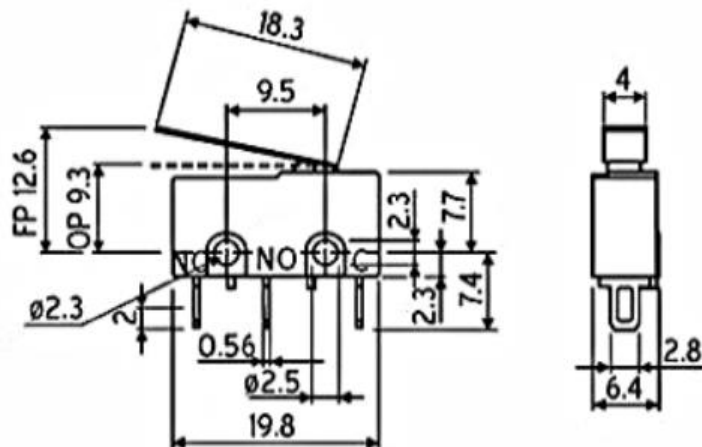



-
- Characteristics
- Single Pole changeover.
 - Fine Silver contacts.
 - Snap action mechanism.
 - Silver / Gold plated terminals.
 - Also available with low actuating force.
 - Conform to IEC 1058-1 standard.
-



Approval



■ LCSO

| | |
|-----------------------|--|
| Actuating force | 50 gms. (max.) |
| Release force | 2.5 gms. (min.) |
| Pretravel | 4.5 mm. (max.) |
| Overtravel | 1.18 mm. |
| Movement differential | 1.10 mm. (max.) |
| Salient features | Plain integral lever solder terminals |

ELECTRICAL RATINGS

| Load | Ratings |
|----------------|--|
| AC | 5 A at 250V 2 A at 250V (for low force models.) |
| DC (resistive) | 0.5 A at 125V or 0.25 A at 250V. 0.25A at 125V and 250V (for low force models.) |
| DC (inductive) | 0.06 A at 110V & 0.03 A at 250V. 0.03 A at 110V and 0.02A at 250V (for low force models.) |