


PCI-1761

8-ch Relay and 8-ch Isolated Digital Input PCI Card

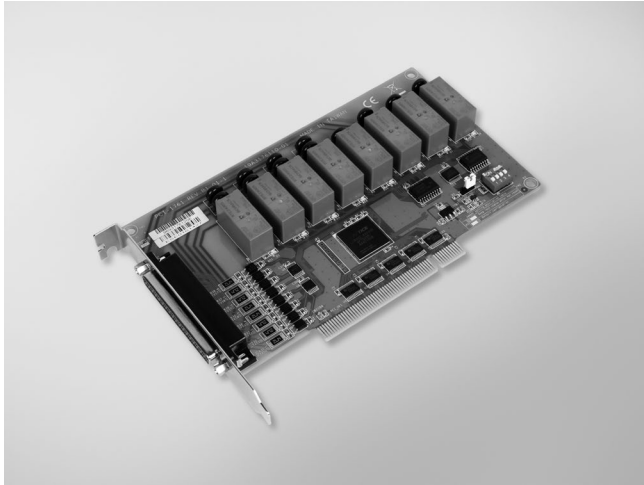

RoHS
COMPLIANT
2002/95/EC

FCC CE

Features

- 8 opto-isolated digital input channels
- 8 relay actuator output channels
- LED indicators to show activated relays
- BoardID switch

Introduction

The PCI-1761 provides 8 opto-isolated digital inputs with isolation protection of 2,500 V_{DC} for collecting digital inputs in noisy environments, 8 relay actuators that can be used as a on/off control devices or small power switches.

For easy monitoring, each relay is equipped with one red LED to show its on/off status. Each isolated input supports both dry contact and wet contact so that it can easily interface with other devices when no voltage is present in the external circuit.

Specifications

Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 3.0 V max.
Logic 1: 10 V min. (50 V max.)
- **Interrupt Capable Ch.** 8 (IDIO ~ IDI7)
- **Isolation Protection** 2,500 V_{DC}
- **Opto-Isolator Response** 100 μs
- **Input Resistance** 5.7 k Ohm @ 1 W

Relay Output

- **Channels** 8
- **Relay Type** 4 x Form C, and 4 x Form A
- **Contact Rating** 2 A @ 250 V_{AC}, 2 A @ 30 V_{DC}
- **Max. Switching Power** 500 VA, 60 W
- **Max. Switching Voltage** 400 V_{AC}, 300 V_{DC}
- **Operating Time** Typical: 7 ms, Max: 15 ms
- **Release Time** Typical: 2 ms, Max: 6 ms
- **Resistance** Contact: 100 m Ohm max.
- **Life Expectancy** 2 x 10⁸ cycles min. @ 2A/ 250V_{AC}

General

- **I/O Connectors** 1 x DB37 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 220 mA
Max.: 5 V @ 750 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

Ordering Information

- **PCI-1761** 8-ch Relay and 8-ch Isolated Digital Input PCI Card

Accessories

- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board