
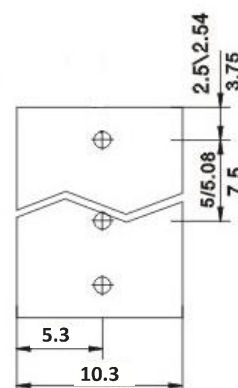




Datasheet

5mm Pitch Standard Rising Clamp Terminal

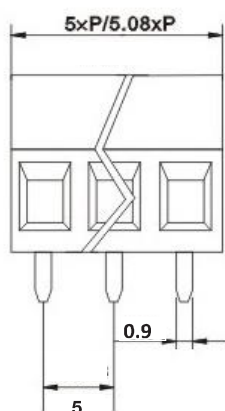

- 2-12 pole interlocking
- Professional rising clamp terminals
- Moulded in green UL94-V0 Flame retardant PA66
- 0.32-3.3 mm² (22-12 AWG)
- Guided pin alignment
-  approved

TYPE NO.	POLES	LENGTH
8970803	2	10mm
8970812	3	15mm
8970815	4	20mm
8970819	5	25mm
8970828	6	30mm
8970821	7	35mm
8970825	8	40mm
8970834	9	45mm
8970837	10	50mm
8970831	11	55mm
8970840	12	60mm

SPECIFICATION	
Rating	10A/300V
Insulation resistance	5000MΩ/1000V
Withstand Voltage	AC1500V/1min
Contact Resistance	20mΩ (max)
Working Temperature	-33°C to 120+°C
Mouldings	UL94-V0 Flame retardant PA66
Screw/Torque	M2.5 Steel, Nickel Plated 0.4Nm
Recommended PCB hole size	ø1.5mm