



# CC1322MTP

## T8 ELECTROMAGNETIC BALLAST



### DESCRIPTION

1 x 13W CFL | 120 Input Voltage | Normal Power Factor | Preheat Start

<b>STARTING METHOD:</b> Preheat
<b>LAMP CONNECTION:</b> Series
<b>INPUT VOLTAGE:</b> 120VAC + 5% -10%
<b>INPUT FREQUENCY:</b> 60 Hz
<b>BALLAST FACTOR (LIGHT OUTPUT):</b> Normal
<b>WARRANTY:</b> 3 Years


### PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

### ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F15T8	1	120	16	0.28	.55	≤1.70	0.84	≤15	≤1.60
F18T8	1	120	16	0.24	.39	≤1.70	0.6	≤15	≤1.60
F15T12	1	120	16	0.29	.51	≤1.70	0.84	≤15	≤1.60
F20T12	1	120	16	0.25	.39	≤1.70	0.64	≤15	≤1.60
CFT13W/GX23	1	120	16	0.24	.61	≤1.70	0.89	≤15	≤1.60

### WIRING DIAGRAM

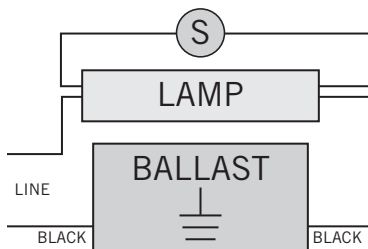




# CC1322MTP

## T8 ELECTROMAGNETIC BALLAST

### MECHANICAL SPECIFICATIONS

#### CASE DIMENSIONS



LENGTH	3.06"
WIDTH	1.74"
HEIGHT	1.34"
MOUNTING	2.75"
CASE STYLE	B2

#### STANDARD LEAD LENGTHS\*

BLACK	2 x 11.5"
-------	-----------

\*Consult Keystone for special lead length requirements.

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
CC1322MTP-CP	Carton Pack	TBD	Active

### CATALOG NUMBER BREAKDOWN

# CC1322MTP-CP

