



KTEB-275-1-TP-PIC-SL

T12 ELECTRONIC FLUORESCENT



PRODUCT FEATURES



STARTING METHOD: Instant	INPUT VOLTAGE: 120VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F96T12 75W	2	120	133.0	1.12	0.99	<1.70	0.88	0.66	10	F2-4
	1	120	82.0	0.68	0.99	<1.70	1.05	1.28	10	F1-4
F96T12/ES 60W	2	120	117.0	0.98	0.99	<1.70	0.88	0.75	10	F2-4
	1	120	72.0	0.60	0.99	<1.70	1.05	1.46	10	F1-4
F72T12 57W	2	120	107.0	0.92	0.99	<1.70	0.90	0.84	10	F2-4
	1	120	67.0	0.60	0.99	<1.70	1.05	1.57	10	F1-4
F48T12 40W	2	120	76.0	0.68	0.99	<1.70	0.92	1.21	10	F2-4
F48T12/ES 30W	2	120	64.0	0.60	0.99	<1.70	0.92	1.44	10	F2-4

WIRING DIAGRAMS

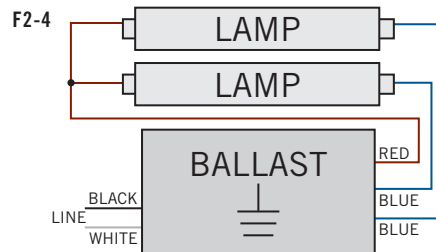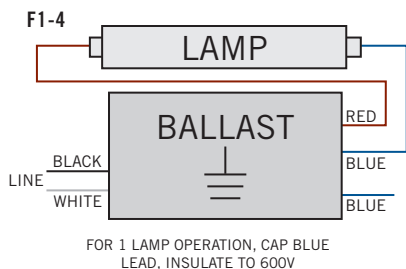




KTEB-275-1-TP-PIC-SL

T12 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

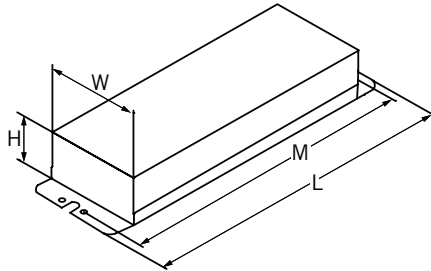

CASE DIMENSIONS


LENGTH: 9.45"
WIDTH: 1.80"
HEIGHT: 1.37"
MOUNTING: 8.90"
UNIT WEIGHT: 1.65 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 58.00" X 58.00"
RED: 66.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

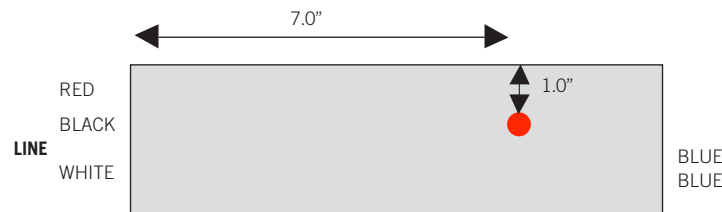

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-275-1-TP-PIC-SL-DP	Distributor	10	Quick Ship
KTEB-275-1-TP-PIC-SL-CP	Carton	10	Active
KTEB-275-1-TP-PIC-SL-BP	Bulk	1,008	Special Order

CATALOG NUMBER BREAKDOWN

KTEB-275-1-TP-PIC-SL

