



113SHPTP

ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST



DESCRIPTION

1 x 13W CFL | 120 Input Voltage | High Power Factor | Preheat Start

STARTING METHOD: Preheat

INPUT VOLTAGE: 120VAC +5% -10%

INPUT FREQUENCY: 60 Hz

BALLAST FACTOR (LIGHT OUTPUT): Normal

WARRANTY: 3 Years



PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermal Protection

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
CFT13W/GX23 CFFQ13W/GX23	1	120V	15W	0.13A	0.94	1.68	0.88	5.87	10%


WIRING DIAGRAMS

P1-4

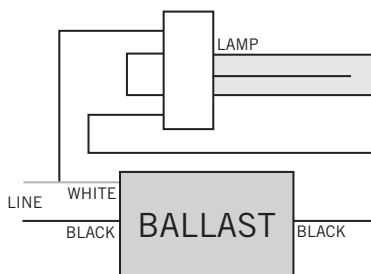

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	3.10"
WIDTH	1.89"
HEIGHT	1.43"
MOUNTING	2.75"
CASE STYLE	C7



113SHPTP

ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
113SHPTP-CP	Carton Pack	50	Active

CATALOG NUMBER BREAKDOWN

1 13SHPTP-CP

