



# CC579TP

## ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST



### DESCRIPTION

1 x 9W CFL | 120 Input Voltage | Normal Power Factor | Preheat Start

<b>STARTING METHOD:</b> Preheat
<b>INPUT VOLTAGE:</b> 120VAC +5% -10%
<b>INPUT FREQUENCY:</b> 60 Hz
<b>BALLAST FACTOR (LIGHT OUTPUT):</b> Normal
<b>WARRANTY:</b> 3 Years



### PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Case Temperature: 194°F, 90°C
- UL, cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermal Protection

### ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
F8T5	1	120V	9W	0.14A	0.55	1.61	0.82	9.11	15%
CFT7W/GX23	1	120V	9W	0.15A	0.52	1.57	0.87	9.67	15%
CFT9W/GX23	1	120V	9W	0.15A	0.54	1.58	0.75	8.33	15%

### WIRING DIAGRAMS

P1-3

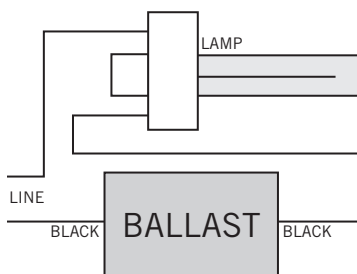

### MECHANICAL SPECIFICATIONS

#### CASE DIMENSIONS

	<b>LENGTH</b>	2.75"
	<b>WIDTH</b>	1.50"
	<b>HEIGHT</b>	1.20"
	<b>MOUNTING</b>	2.25"
	<b>CASE STYLE</b>	B1

#### STANDARD LEAD LENGTHS\*

<b>BLACK</b>	12"
--------------	-----

\*Consult Keystone for special lead length requirements.



# CC579TP

## ELECTROMAGNETIC COMPACT FLUORESCENT BALLAST

### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
CC579TP-CP	Carton Pack	72	Active

### CATALOG NUMBER BREAKDOWN

# CC579TP-CP

