

# Weather Proof Cover - Extra-Duty Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hrz, 2.75" Gray

### Item WP5100G



### **PRODUCT DESCRIPTION**

Plastic In-Use Weatherproof Covers are extra-duty rated and easy to install. Covers come with a gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

### **FEATURES**

- ► Complies with 2020 NEC Article 406.9 (B)(1) for wet locations and extra-duty applications
- ► CEC Article 26-702 Compliant
- ► UL Certified for Type 3R outdoor enclosures
- ► Meets requirements for cold impact testing: -60° F (-51° C)
- ► Heavy-duty UV stabilized polycarbonate cover, mounting base and inserts
- ▶ 1/8" (3 mm) thick, neoprene gasket with slits for mounting screws
- ► Lockable hasp: All models accept up to 1/4" (6 mm) dia shank
- ► Impact rated: 12 lbf. impact test to ensure cover remains intact
- ► Reinforced hinge pin designed to exceed 40 lbf. hinge hang/stress test
- ► Warranty: 1-year limited

#### **APPLICATIONS**

► Receptacle Protection

#### **TECHNICAL DATA**

General	
Model Number	WP5100G
Description	Extra-Duty Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hrz, 2.75" Gray
UPC Code	078275145306
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

Mechanical Specifications	
Number of Included Inserts	3
Insert Types Included	WP17
Hinge Direction	Vertical/Horizontal
Is Extra-Duty Rated	Yes

Dimensions		
Product Dimensions (H x W x D) in	6 1/3 x 4 2/3 x 2 3/4 in	
Accepted Cord Size Max	2x14 AWG; 1x12 AWG	
Box Type	Single	

Material Specifications	
Color	Gray
Weatherproof Cover Material	UV Stabilized Plastic

Packaging	
Shipping Weight (lbs)	0.5




Unit Ca	rton Dimensions (H x W x L) in	6.5 x 2.75 x 4.75 in
---------	--------------------------------	----------------------

Standards and Certifications	
UL Certification	cULus
CSA Certification	cCSAus
California Proposition 65	None



### **DRAWINGS AND DIAGRAMS**

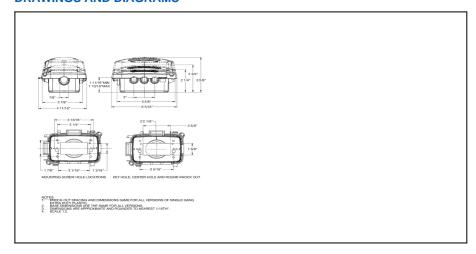



## **ACCESSORIES**



WP17 Single-Gang Inserts (3)