


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3779: DEFINED COLOR TO LIGHT GRAY, NEW FORMAT	1/7/09	D.FRISIELLO
F	ECN 6604: REVISED LOGO'S, ADDED PANTONE 400C, ALL NOTES	3/20/13	D.FRISIELLO
G	ECN 7231: REVISE DESCRIPTION FOR "HOOD", NEW FORMAT, ROHS NOTE	1/9/14	D.FRISIELLO

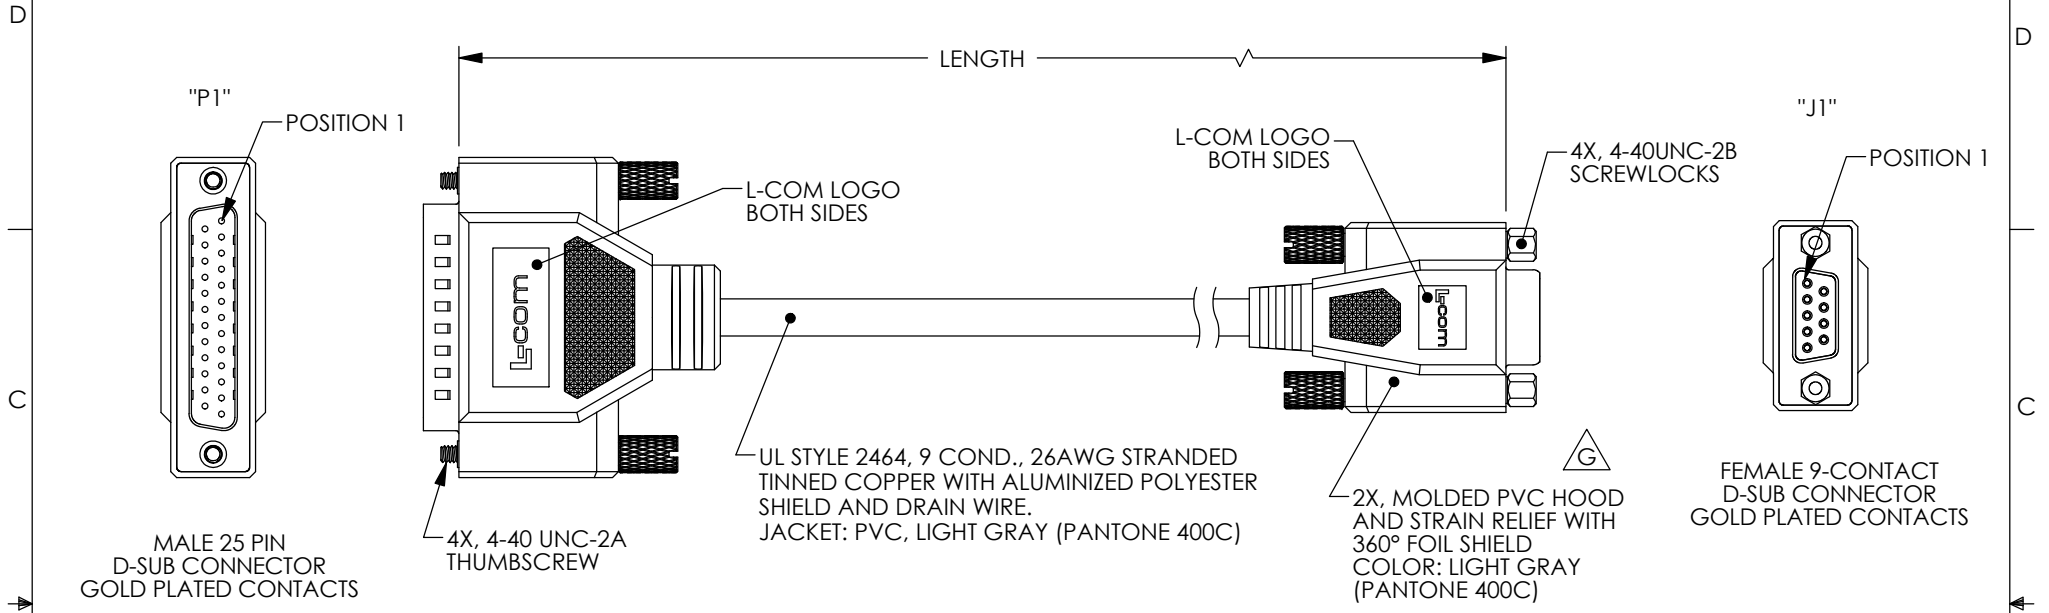

WIRING MAP		
"P1"	WIRE COLOR	"J1"
2	BLACK	2
3	GRAY	3
6, 8	RED	4
7	GREEN	5
20	BROWN	1, 6
5	BLUE	7
4	ORANGE	8
1, SHELL	DRAIN WIRE	SHELL

MODEL NUMBER	LENGTH	
	FEET	METERS
CNULL259MF-5	5.0	1.52
CNULL259MF-10	10.0	3.05
CNULL259MF-25	25.0	7.62

- NOTES:**
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY MCCORMICK	02/15/02		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.PARHAM	02/15/02	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY R.CARRICK	02/15/02	CABLE, DB25M/DB9F NULL MODEM	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. CNULL259MF	REV. G
	CSNULL-FS01	SCALE: NONE	CAD FILE: CSNULL259MF.SLDDRW	SHEET 1 OF 1