


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	11/5/01	T CLARK
B	ECN 3774: CN RELEASE AND NEW MORMAT	12/30/08	D.FRISIELLO
C	ECN 6749: UPDATED FORMAT, PACKAGING, & LOGOS. ADDED PANTONE #'S	3/25/13	D. DESJARDIN

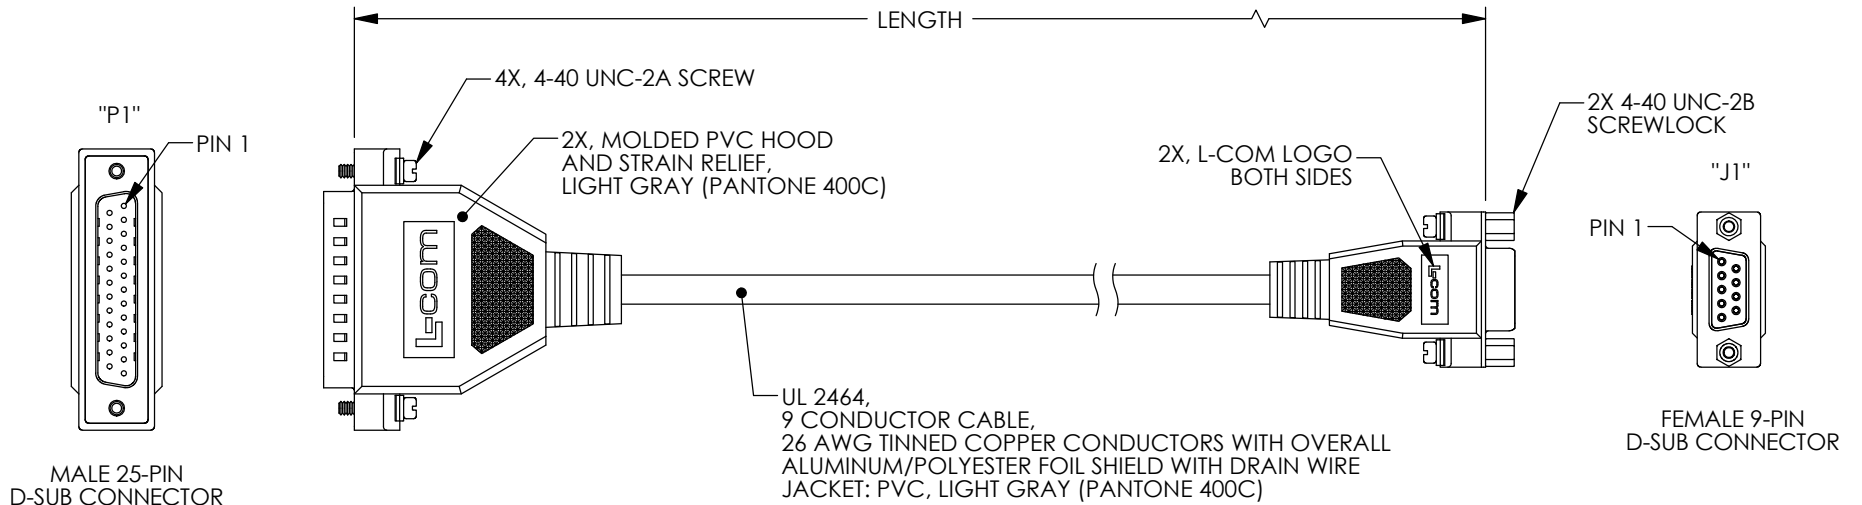

WIRING MAP	
"P1"	"J1"
8	1
3	2
2	3
20	4
7	5
6	6
4	7
5	8
22	9
SHELL	SHELL

PART NUMBER	LENGTH	
	FEET	METERS
CMZ6-IBM	6.0	1.83
CMZ10-IBM	10.0	3.05

NOTES:

- INTERNAL 360° FOIL SHIELDS IN CONNECTOR HOODS ARE CONNECTED TO THE CABLE DRAIN WIRE AND CONNECTOR FRAMES.
- CONNECTOR PINS ARE GOLD PLATED.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY T CLARK	11/2/2001	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D PARHAM	11/2/2001	PRODUCT DESCRIPTION CBL, AT MODEM DB25M/DB9F
	APPROVED BY C MCCORMICK	11/5/2001	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		
COLOR VARIATIONS MAY OCCUR			