


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES SD25P-PC-OD1	10/20/2015	D.CASTRO
B	ECN 9944: REVISED CURRENT RATING TO 1 AMP FROM 5 AMP	07/18/2019	BGATES

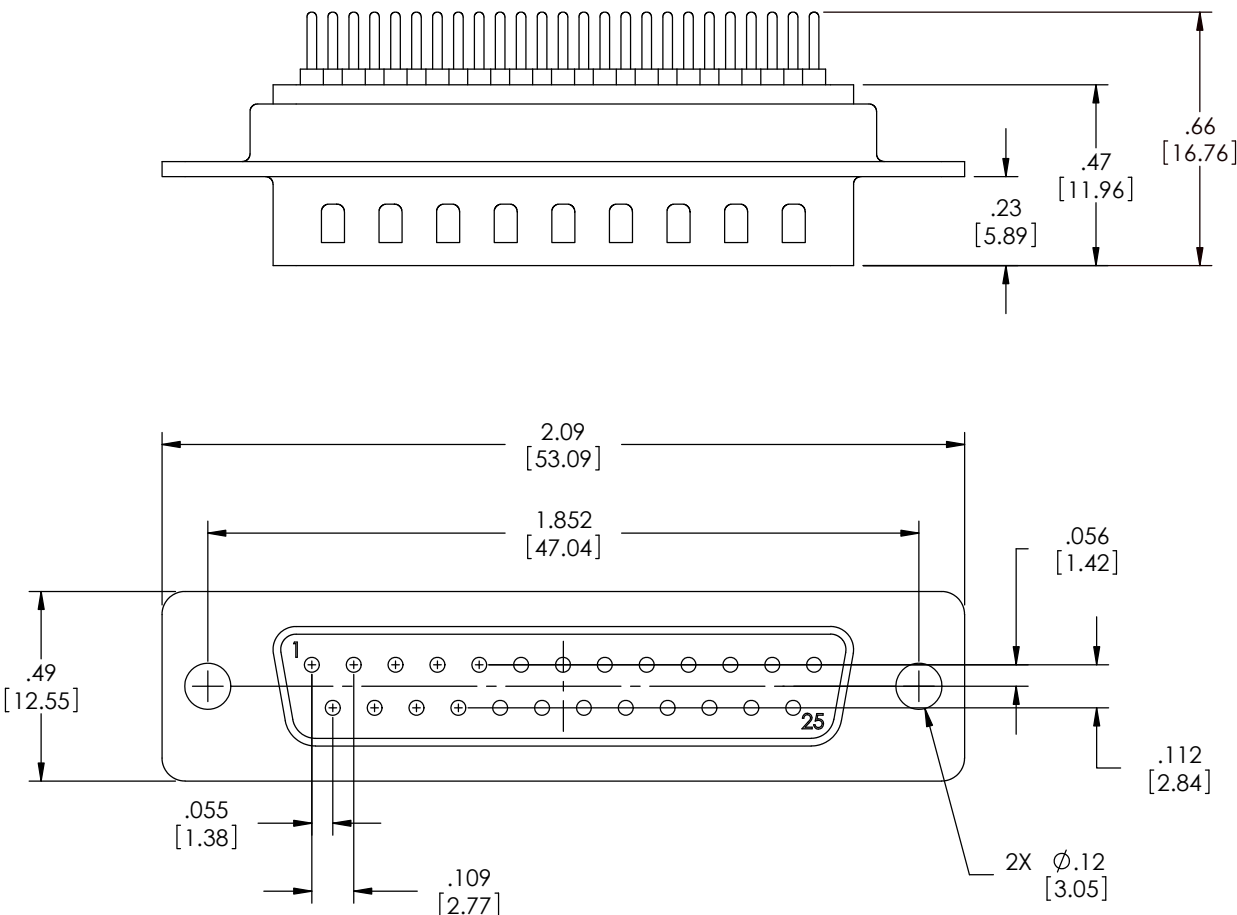

NOTES:

MATERIALS:
 SHELL: COLD ROLLED STEEL
 CONTACTS: BRASS
 INSULATOR: THERMOPLASTIC PBT, UL94V-0

FINISH:
 SHELL: TIN PLATED
 CONTACT SURFACES: GOLD

ELECTRICAL:
 CURRENT RATING: 1 AMP
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC
 INSULATION RESISTANCE: 1000 MΩ PER MINUTE @ 500 VDC
 CONTACT RESISTANCE: 20mΩ MAX

MISCELLANEOUS:
 OPERATING TEMPERATURE: -55°C ~ +105°C
 ALL DIMENSIONS ARE FOR REFERENCE ONLY

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY B.MAZEJKA CHECKED BY C.MCCORMICK APPROVED BY D.PARHAM	DATE 12/18/2003 12/19/2003 12/19/2003	L-com Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY D-SUBMINIATURE	
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION CONNECTOR, DB25M PCB	SCALE: NONE CAD FILE: SD25P-PC.SLDDRW SHEET 1 OF 1
	PROJECTION 	SIZE A	FSCM NO. 43321	DWG. NO. SD25P-PC REV. B