REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	2/25/2005
B	ADDED TABLE WITH R AND B	6/1/2006

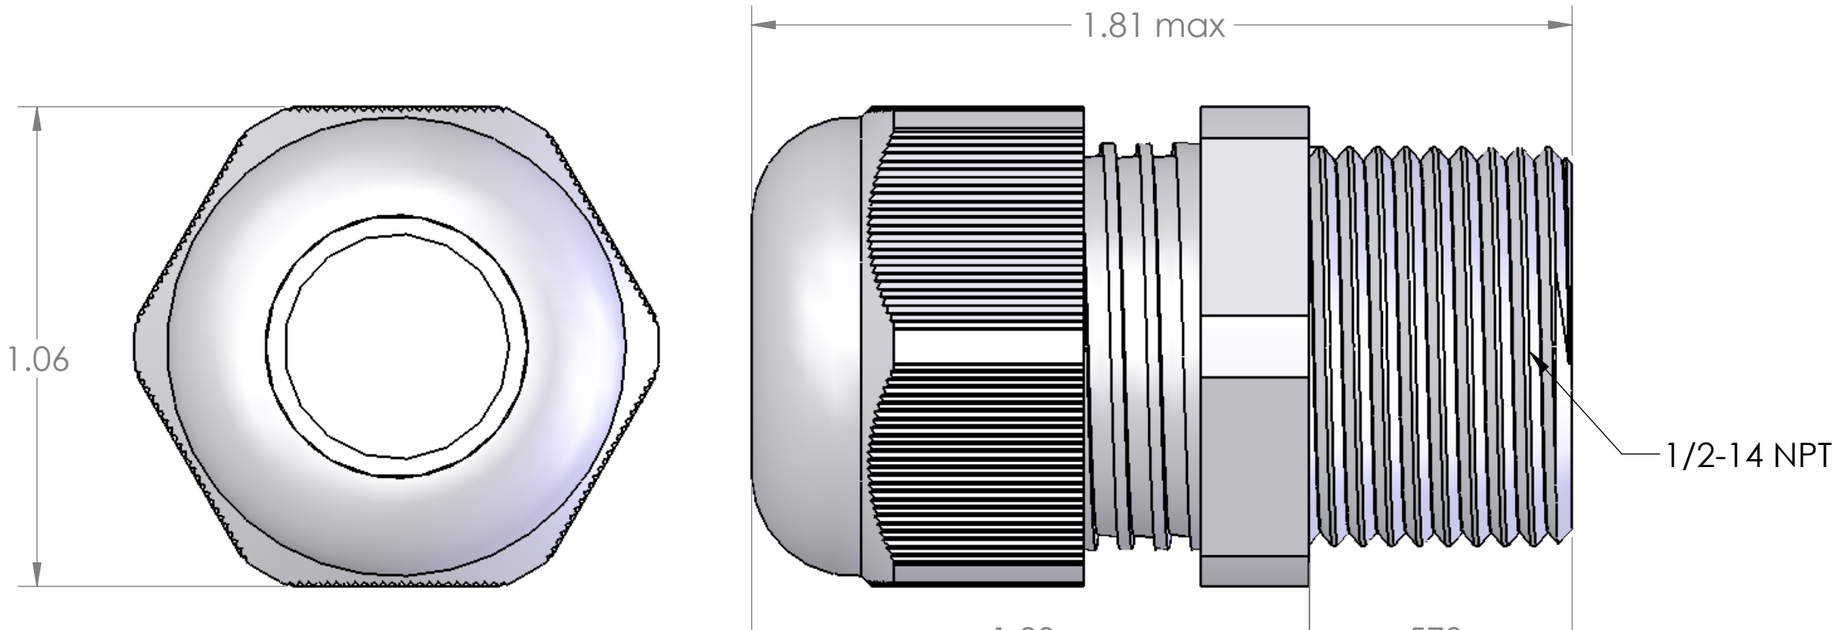

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

MATERIALS	
BODY:	GRAY POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	5.0 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

SEAL RATED T0: IP68

PART NUMBER	COLOR	SEALING RANGE
PCG-1/2	GRAY	.394 - .551 [10 - 14 MM]
PCG-1/2R	GRAY	.276 - .472 [7 - 12mm]
PCG-1/2-B	BLACK	.394 - .551 [10 - 14 MM]
PCG-1/2R-B	BLACK	.276 - .472 [7 - 12mm]

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
MATERIAL
FINISH
SPECIFICATIONS
DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. PCG-1/2 | REV B

SCALE: 3:1 | WEIGHT: | SHEET 1 OF 1