

Key Specifications - Electrical


Operating temperature:	-20 to +65°C
Impedance:	50 ohm
Gain:	2dBi
VSWR:	≤3.0
Frequency range:	0dBi @ 790 - 960MHz 1dBi @ 1710 - 2170MHz 2dBi @ 2500 - 2700MHz
Radiation:	Omni
Polarization:	Vertical

Key Specifications - Mechanical


Weight:	29g
Connector:	SMA
Body material:	PU/PC
Mounting method:	Direct connect

Test Reports


E Plane

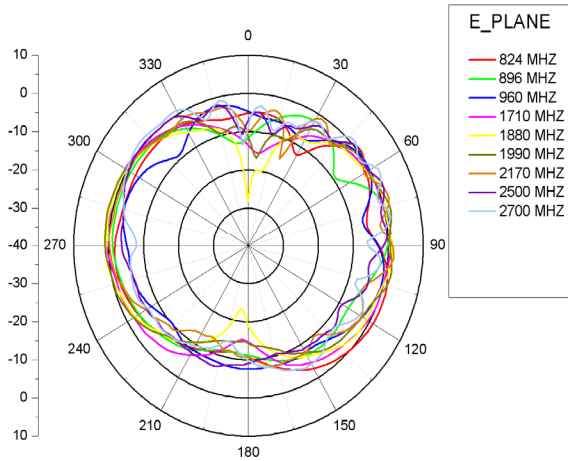

H Plane

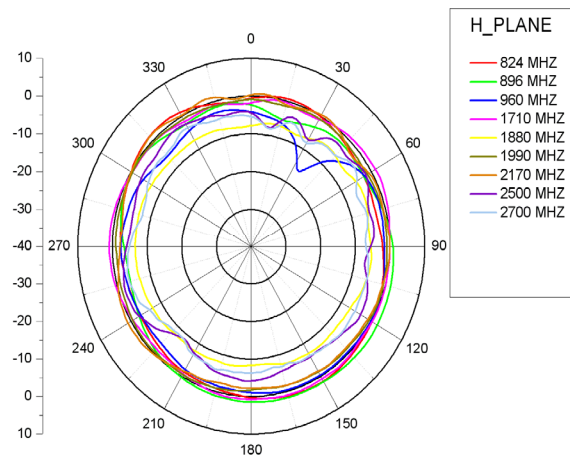

Return Loss

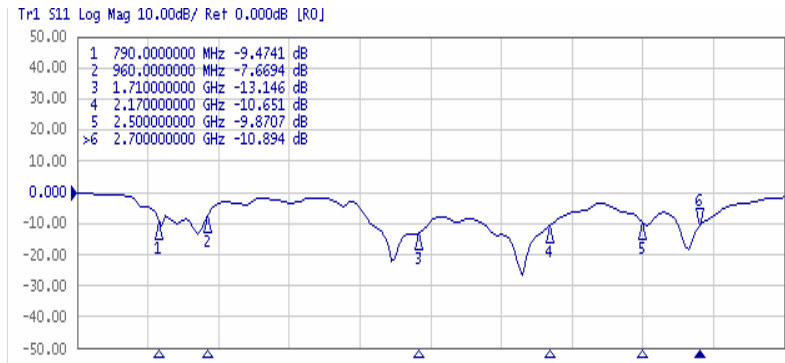

VSWR

