

APPROVALS



Available upon request


Dimensions

Picture is a representation of actual product

| Rated Capacity | H | L | L1 | L2 | L3 | L4 | L5 | L6 | W | W2 | D |
|----------------|------|-------|------|------|-----|------|------|------|------|------|-----|
| kg/mm | | | | | | | | | | | |
| 5-200 | 31.0 | 123.0 | 18.0 | 82.0 | 9.9 | 21.0 | 45.0 | 27.9 | 42.0 | 20.1 | 8.2 |

Order Information

| Load Rating | Part # | Est. Weight | Price |
|----------------|--------|-------------|---------|
| OIML C3 | | | |
| 10 kg | 36173 | 2 lb | Consult |
| 20 kg | 36174 | 2 lb | Consult |
| 50 kg | 36175 | 2 lb | Consult |
| 100 kg | 36176 | 2 lb | Consult |
| 200 kg | 36177 | 2 lb | Consult |
| OIML D1 | | | |
| 5 kg | 36172 | 2 lb | Consult |

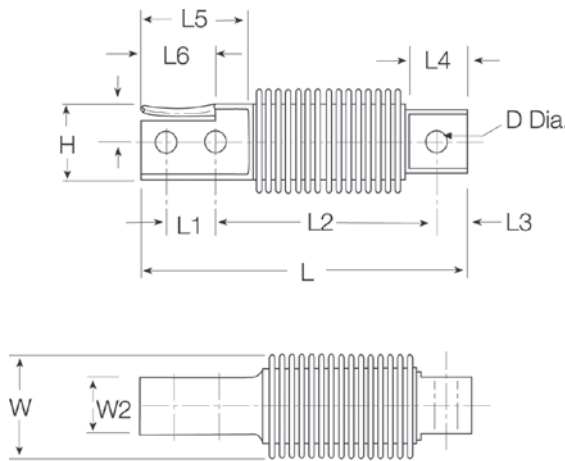

Interchangeable Products

| | |
|----------------------------|----------|
| RICE LAKE WEIGHING SYSTEMS | |
| RLHBB** | — |
| RICE LAKE WEIGHING SYSTEMS | |
| RL9018SS | page 141 |
| VPG® REVERE | |
| SHB | page 289 |
| VPG® TEDEA-HUNTLEIGH | |
| 355 | page 345 |
| METTLER TOLEDO® | |
| MTB*** | — |

** Except for 500 kg

** Color code is different

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

356 (± 0.12) ohms

Input Resistance:

350-400 ohms

Material/Finish:

Stainless steel

Temperature:

Operating range
0° F to 150° F (-18° C to 65° C)

Seal Type:

Welded-seal, IP68

Safe Overload:

150% full scale

Rated Excitation:

5- 10 V DC (15 V maximum)

Combined Error:

0.05% full scale

Insulation Resistance:

5,000 megohms

Cable Length:

10 ft

Cable Diameter:

0.190 in PVC jacket

Cable Color Code:

Blue +Excitation
Black -Excitation
White +Signal
Red -Signal
Green +Sense
Grey -Sense

Warranty:

One-year limited warranty

Approvals:

FM
OIML
Ex (available upon request)