


RI360P2-QR14-ESG25X2-0.3-RS8

Inductive Angle Sensor

Premium Line

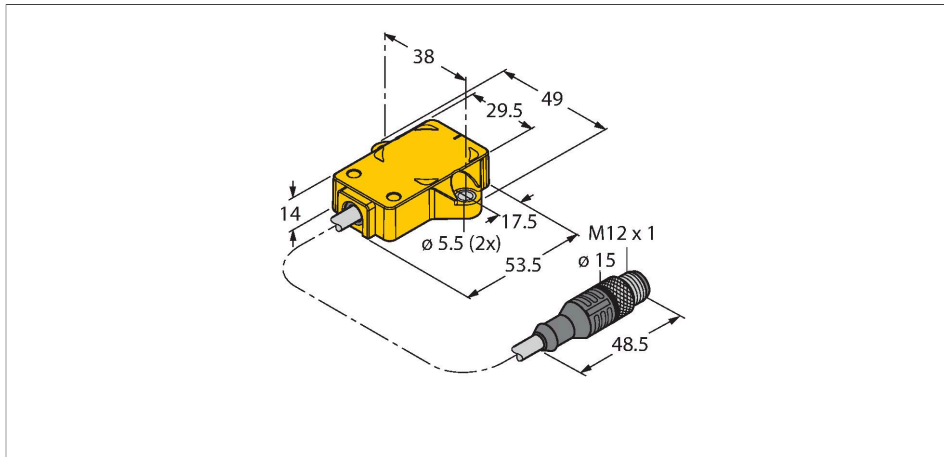



Features

- Rectangular, plastic
- Many mounting possibilities
- P2-Ri-QR14 included in delivery
- Measuring range displayed via LED
- Immune to electromagnetic interference
- Resolution, 16-bit
- 15...30 VDC
- Cable with male end M12 x 1, 8-pin
- SSI output
- 25 bit, Gray-coded
- 62.5 kHz ... 1 MHz

Technical data

Type	RI360P2-QR14-ESG25X2-0.3-RS8
ID no.	1590826
Measuring principle	Inductive
Starting torque shaft load (radial / axial)	Not applicable because of contactless measuring principle
Resolution	16 bit
Measuring range	0...360 °
Nominal distance	1.5 mm
Repeat accuracy	≤ 0.025 % of full scale
Linearity deviation	≤ 0.3 %f.s.
Temperature drift	≤ ± 0.001 % / K
Ambient temperature	-25...+70 °C
Operating voltage	15...30 VDC
Residual ripple	≤ 10 % U _{ss}
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes / yes (voltage supply)
Output type	Absolute singleturn
Communication protocol	SSi
Output function	8-pin, 25 Bit, Gray coded
Process data area	Bit 0 ... Bit 15
Diagnostic bits	Bit 22: Positioning element is in the measuring range, lower signal quality (e.g. distance too large)

Wiring diagram

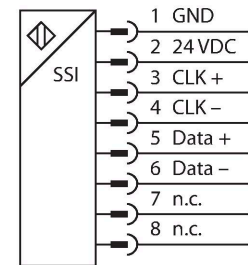

Functional principle


The measuring principle of inductive angle sensors is based on oscillation circuit coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the angle of the positioning element. The rugged sensors are wear and maintenance-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

Technical data

	Bit 23: Positioning element is outside the measuring range
Sample rate	500 Hz
Current consumption	< 100 mA
Design	Rectangular, QR14
Dimensions	53.5 x 49 x 14 mm
Flange type	Flange without mounting element
Shaft Type	Blind hole shaft
Shaft diameter D [mm]	6 6.35
Housing material	Plastic, PBT-GF30-V0
Electrical connection	Cable with connector, M12 × 1
Cable quality	0.3 m
Vibration resistance	55 Hz (1 mm)
Vibration resistance (EN 60068-2-6)	20 g; 10...3000 Hz; 50 cycles; 3 axes
Shock resistance (EN 60068-2-27)	100 g; 11 ms ½ sinus; each 3x; 3 axes
Continuous shock resistance (EN 60068-2-29)	40 g; 6 ms ½ sinus; each 4000 x; 3 axes
Protection class	IP68 IP69K
MTTF	138 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Measuring range display	multifunction LED, green green flashing
Included in delivery	positioning element P2-Ri-QR14; for technical details see data sheet


Mounting instructions

Mounting instructions/Description

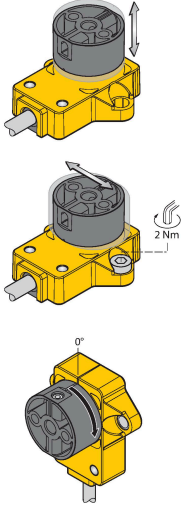


Accessories


P1-RI-QR14 1590812
Positioning element for angle sensors RI-QR14, for Ø 6 mm shafts

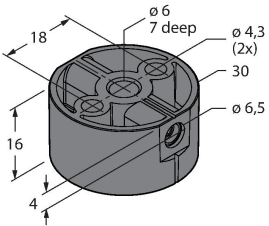


P2-RI-QR14 1590819
Positioning element for angle sensors RI-QR14, for Ø 6.35 mm shafts

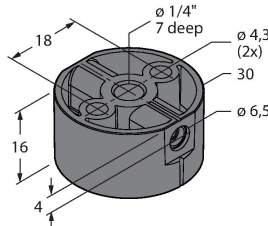


P3-RI-QR14 1590865
Positioning element for angle sensors RI-QR14, flat design, using shield plate SP1-QR14 is recommended

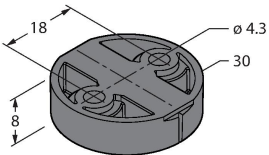


SP1-QR14 1590873
Shield plate Ø 30 mm, aluminium

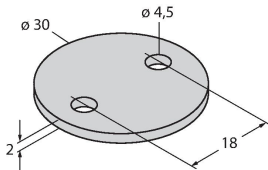

HSA-M6-QR14 6901051
Adapter for RI-QR14 specific positioning elements, hollow on solid shaft, Ø 6 mm

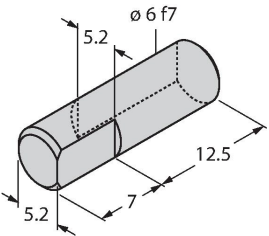

HSA-M8-QR14 6901052
Adapter for RI-QR14 specific positioning elements, hollow on solid shaft, Ø 8 mm

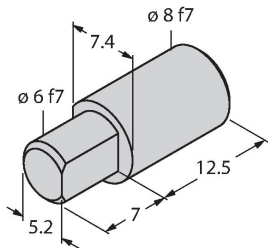

DS-RI-QR14

1590814

Spacer sleeves for rear mounting of
RI-QR14, 2 pcs. per bag