

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [5054311100](#)  
**Status:** **Active**  
**Overview:** Micro-Lock Plus Wire-to-Board Connector System  
**Description:** Micro-Lock Plus Female Crimp Terminal, Gold (Au) Plating, 26-30 AWG, Reel

**Documents:**

<a href="#">3D Model</a>	<a href="#">Product Specification 5055651002-PS-000 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification 5055650000-AS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Application Specification AS-505432-001-001 (PDF)</a>
<a href="#">Product Specification 2045320000-PS-001 (PDF)</a>	<a href="#">Application Specification AS-505565-001-001 (PDF)</a>
<a href="#">Product Specification 2045321000-PS-001 (PDF)</a>	<a href="#">Packaging Specification 5054319200-200 (PDF)</a>
<a href="#">Product Specification 5054320000-006 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification 5054321000-PS-006 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification 5055650002-000 (PDF)</a>	

**General**

Product Family	Crimp Terminals
Series	<a href="#">505431</a>
Application	Signal, Wire-to-Board
Crimp Quality Equipment	Yes
Overview	<a href="#">Micro-Lock Plus Wire-to-Board Connector System</a>
Product Name	Micro-Lock Plus
Taxonomy	Crimp Terminals
UPC	889056853989

**Physical**

Durability (mating cycles max)	30
Gender	Female
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	35.434/mg
Packaging Type	Reel
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	0.78-1.02mm
Wire Size AWG	26, 28, 30
Wire Size mm <sup>2</sup>	0.049-0.136


**Electrical**

Current - Maximum per Contact	1.5A
Voltage - Maximum	50V AC (RMS)/DC

**Material Info**

**Reference - Drawing Numbers**

Application Specification	5055650000-AS-000, AS-505432-001-001, AS-505565-001-001
Crimp Specification	CS-505431-001-001
Packaging Specification	5054319200-200
Product Specification	2045320000-PS-001, 2045321000-PS-001, 5054320000-006, 5054321000-PS-006, 5055650002-000, 5055651002-PS-000
Sales Drawing	5054311100-SD-000

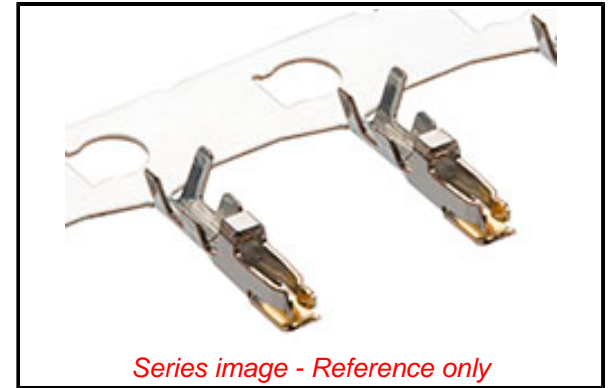

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[505431](#) Series

**Use With**

Micro-Lock Plus Receptacle Housing  
[505565](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Hand Crimp Tool for Micro-Lock Plus 1.25mm Pitch Wire-to-Board Receptacle Terminals, 26-30 AWG, UL1061 wire	<a href="#">2002180300</a>
Extraction and Activation Tool	<a href="#">638132700</a>
FineAdjust Applicator for Micro-Lock Plus,	<a href="#">639042300</a>

1.25mm (.049")  
Wire to Board Crimp  
Terminal, 26-30  
AWG

**Japan**

**Description**

**Product #**

S-1 Applicator for  
Micro-Lock Plus  
Terminals, 26-30  
AWG

5781463700

This document was generated on 09/23/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**