

SPECIFICATIONS:

- MATERIAL
HOUSING: POLYCARBONATE (PC),
CONTACT: PHOSPHOR BRONZE
FINE GOLD PLATED OVER NICKEL,
- MECHANICAL
CABLE TO PLUG TENSILE STRENGTH:
20lbs MINIMUM,
DURABILITY: 200 MATING CYCLES MIN,

- ELECTRICAL
UL APPLICATIONS: 250 VOLTS AC
MAX. AT 2 AMPS,
DIELECTRIC WITHSTANDING VOLTAGE:
500 VOLTS AC,
INSULATION RESISTANCE: 500 MEGOHMS,
TERMINATION RESISTANCE: 35 MILLIOHMS
MAX. AFTER ENVIRONMENTAL TESTING,

REACH

RoHS



UNLESS OTHERWISE SPECIFIED TOLERANCE : X.X ±0.3 X.XX ±0.15		ANGLES : ±2° DO NOT SCALE DRAWING		TITLE 8P8C		G00350	
DRAWN BY	Bonnie						
CHECKED BY	Eric			SCALE NA	THIRD ANGLE PROJECTION 	PAGE 1 OF 2	
APPROVED BY	Mark						ITEM NO. 331-6386
DWG NO.							
TOOLING NO.							


1 2 3 4 5 6 7 8

A

Logo color: Red


Text Color: White

Background Color: Red

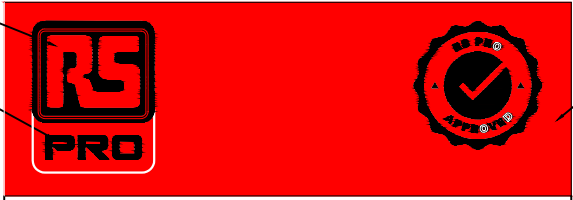


Bar code & RoHS ,PE
Loge ,Text color :
Black

Background Color: White

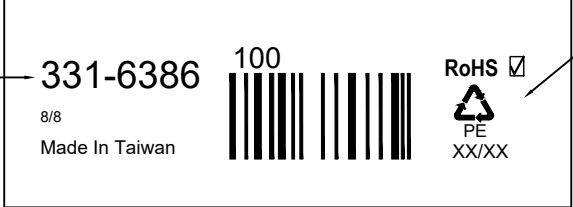

B

C

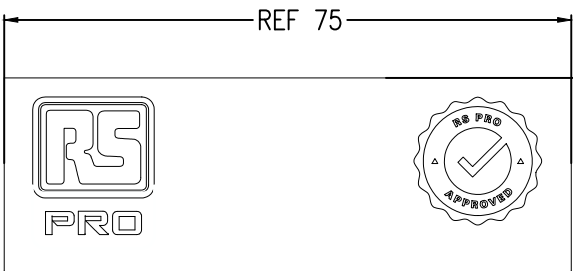


数量

RS PN

產地

台灣製造 Made in Taiwan

331-6386



RoHS狀態

可回收材料標示

生產周期 (年/周)

XX/XX

Week周

Year年

條碼內容: 3316386

RS PN: 料號中的“-”不可輸入
(Code 128)

REACH
RoHS

D

E

F

UNLESS OTHERWISE SPECIFIED
TOLERANCE :
X.X ±0.3
X.XX ±0.15
ANGLES : ±2°
DO NOT SCALE DRAWING

榮昌科技股份有限公司
GRAND-TEK TECHNOLOGY CO., LTD.

DRAWN BY Bonnie
CHECKED BY Eric
APPROVED BY Mark
DWG NO. -
TOOLING NO. -

TITLE 8P8C
G00350
SIZE A4 UNIT mm PART NO. - REV. D
SCALE NA THIRD ANGLE PROJECTION
PAGE 2 OF 2
ITEM NO. 331-6386
DATE 2018-10-09

1 2 3 4 5 6 7 8