




# INTERVOX Speakers from International C

215 McCormick Drive, Bohemia, NY 11716 (631) 952-9595 (631) 952-9597 www.icc107.com

1.	<b>MODEL:</b>	<b>S160RS-M-1W</b>			
2.	Dimension	Outer Diameter	<b>40</b> mm.	Baffle Opening	<b>35.8</b> mm.
		Height	<b>Refer to Drawing</b>	Weight	<b>9.2</b> Grams.
3.	Magnet	Materials	<b>Rare Earth</b>	Size	<b>∅ 12.5X 1.5</b> mm.
4.	Nominal Impedance	<b>8</b> Ω	± <b>15</b> %	At	<b>1000</b> Hz.
5.	Power Rating	Normal	<b>1000</b> mW.	Maximum	<b>1500</b> mW.
6.	Lowest Resonant Frequency	<b>430</b>	± <b>20</b> %		Hz.
7.	Output Sound Pressure Level (S.P.L.)	<b>84</b> ± <b>3</b> db / 1.0 Watt · 0.5 Meter.			
		Average at	<b>800,</b>	<b>1000,</b>	<b>1200,</b>
8.	Frequency Range	<b>200</b> ~ <b>5000</b> Hz.	Average SPL - 10 db.		
9.	Distortion	<b>5</b> %	Maximum At	<b>1000</b> Hz.	<b>1000</b> mW.
10.	Abnormal Sound Test	Must be Normal Tested By <b>2.9</b> Volts. Sine Wave.			
11.	Load Test	White Noise with Weighted Filter <b>2.9</b> Volts.(RMS) <b>24</b> Hrs.			
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			

### MOUNTING NOTICE

AT LEAST  
0.8mm  
FOR  
DIAPHRAGM  
MOVING

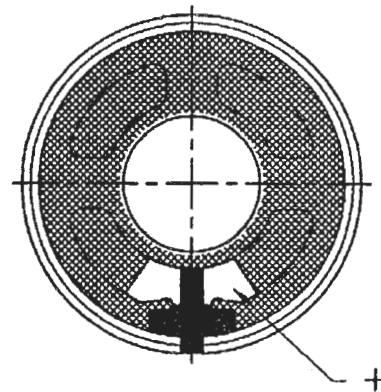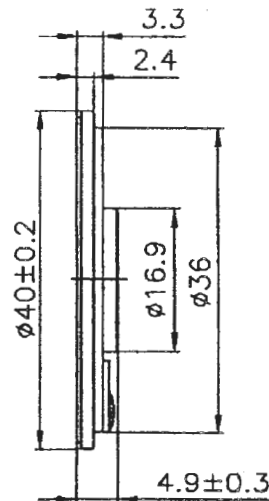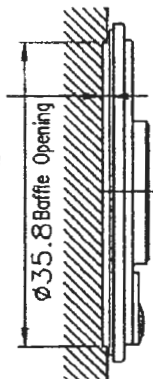

450

Unit : mm

Housing Material : METAL

# INTERVOX Speakers from International ©

S160RS-M-1W

450


UOL:2.828K 1W) DIS:0.5M

X:1.0000kHz

\*Y:85.31dB

ZA:Live Curve

SSR Fund.

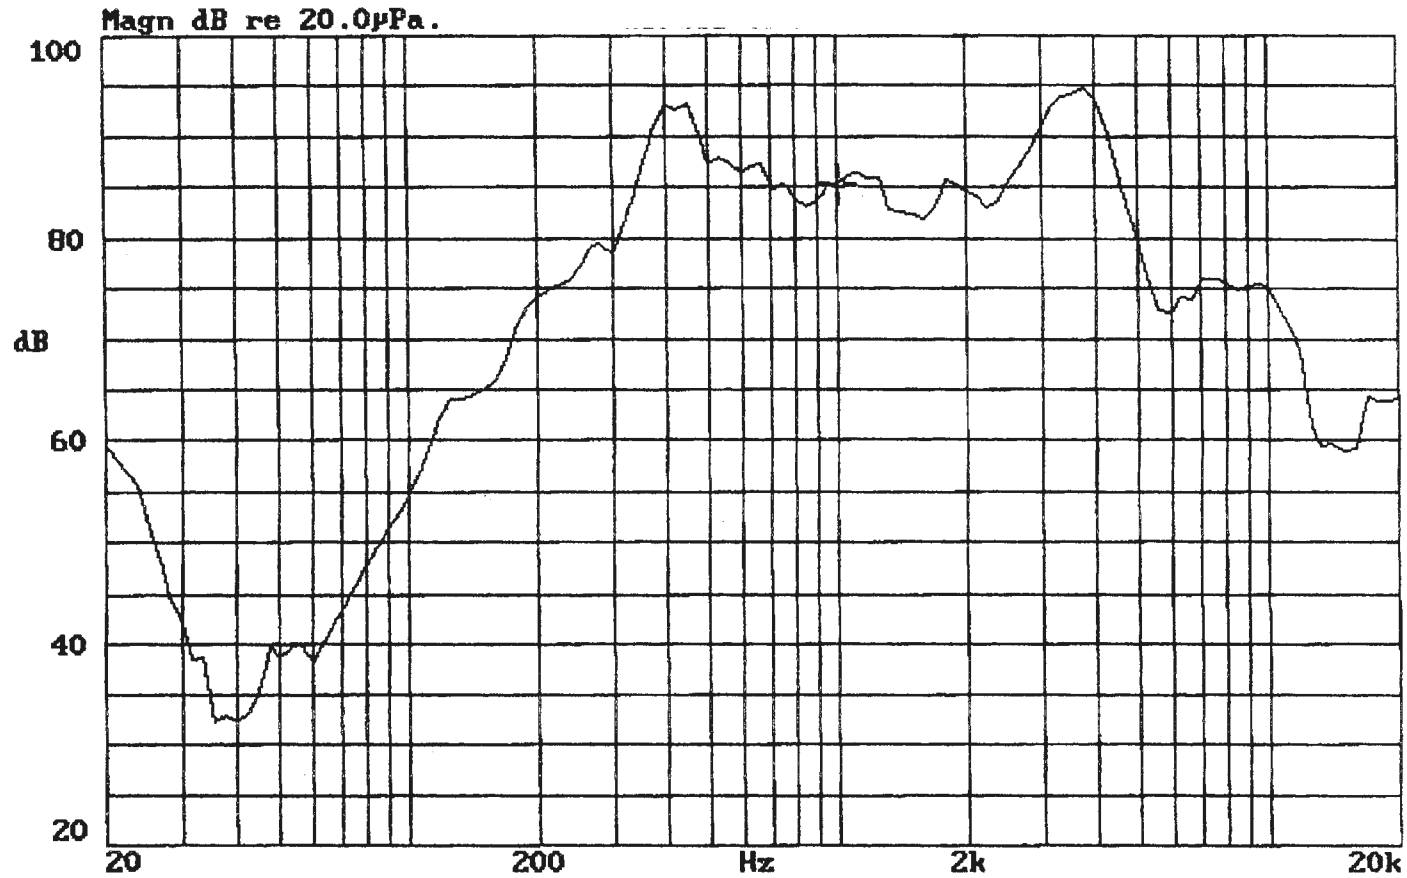

15-DEC-2000 14:38:12

Mode: SPEAKER

