

ADVANCE

by  Signify

T8 LED Driver

Centium

ICN-2P15-TLED-N



ICN-2P15-TLED-N

Brand Name	Centium
Driver Type	T8 LED Electronic
Lamp Connection	Parallel
Input Voltage	120-277V
Input Frequency	50/60 Hz
Status	Active



Specifications

Description	Product No.	Model No.	Ordering Code	Bare Lamp Watts (W)	Nom. Initial Lumens	Min. Start Temp (°F/°C)	Num. of Lamps	Input Current (A)	Input Power (W)	Max THD%	Power Factor	
Philips LED InstantFit T8 - 4' Ultra High Output MasterClass	545178	9290020162B	15.5T8/MAS/48-830/IF23/P/DIM 25/1	15.5	2300	-13/-25	2	0.300/0.135	34	10	0.99/0.97	
	533372	9290020163B	15.5T8/MAS/48-835/IF24/P/DIM 25/1		2400							
	545194	9290020164B	15.5T8/MAS/48-840/IF25/P/DIM 25/1		2500							
		545200	9290020165B	15.5T8/MAS/48-850/IF25/P/DIM 25/1		2500		1	0.160/0.070	19	15	0.99/0.91
		533372	9290020163A	15.5T8/MAS/48-835/IF24/P 10/1	15.5	2400	-13/-25	2	0.230/0.100	27	10	0.99/0.95
		545194	9290020164A	15.5T8/MAS/48-840/IF25/P 10/1		2500						
	545200	9290020165A	15.5T8/MAS/48-850/IF25/P 10/1	2500								
Philips LED InstantFit T8 - 3' MasterClass	539858	9290019675B	8.5T8/MAS/36-830/IF13/P/DIM 10/1	8.5	1300	-13/-25	2	0.160/0.070	18	10	0.99/0.91	
	539866	9290019679B	8.5T8/MAS/36-835/IF13/P/DIM 10/1		1300							
	539874	9290019676B	8.5T8/MAS/36-840/IF14/P/DIM 10/1		1400							
		539882	9290019677B	8.5T8/MAS/36-850/IF14/P/DIM 10/1		1400		1	0.090/0.050	11	15	0.97/0.79
		539858	9290019675A	8.5T8/MAS/36-830/IF13/P 10/1	8.5	1300	-13/-25	2	0.160/0.070	19	10	0.99/0.91
		539866	9290019679A	8.5T8/MAS/36-835/IF13/P 10/1		1300						
	539874	9290019676A	8.5T8/MAS/36-840/IF14/P 10/1	1400								
	539882	9290019677A	8.5T8/MAS/36-850/IF14/P 10/1		1400		1	0.090/0.060	10	15	0.97/0.79	
Philips LED InstantFit T8 - 2' MasterClass	541813	9290019869B	7T8/MAS/24-830/IF10/P/DIM 10/1	7	1050	-13/-25	2	0.150/0.070	17	10	0.98/0.90	
	541821	9290019870B	7T8/MAS/24-835/IF10/P/DIM 10/1		1050							
	541839	9290019871B	7T8/MAS/24-840/IF11/P/DIM 10/1		1150							
		541847	9290019872B	7T8/MAS/24-850/IF11/P/DIM 10/1		1150		1	0.080/0.050	10	15	0.96/0.77
		541813	9290019869A	7T8/MAS/24-830/IF10/P 10/1	7	1050	-13/-25	2	0.150/0.070	17	10	0.98/0.90
		541821	9290019870A	7T8/MAS/24-835/IF10/P 10/1		1050						
	541839	9290019871A	7T8/MAS/24-840/IF11/P 10/1	1150								
	541847	9290019872A	7T8/MAS/24-850/IF11/P 10/1		1150		1	0.080/0.050	10	15	0.96/0.77	
Philips LED InstantFit U-Bent T8 - 6U MasterClass	541854	9290019874B	13T8-6U/MAS/24-830/IF20/P/DIM 10/1	13	2000	-13/-25	2	0.250/0.110	30	10	0.99/0.96	
	541862	9290019875B	13T8-6U/MAS/24-835/IF20/P/DIM 10/1		2000							
	541870	9290019876B	13T8-6U/MAS/24-840/IF21/P/DIM 10/1		2100							
		541888	9290019877B	13T8-6U/MAS/24-850/IF21/P/DIM 10/1		2100		1	0.130/0.070	16	15	0.98/0.88
		541854	9290019874A	13T8-6U/MAS/24-830/IF20/P 10/1	13	2000	-13/-25	2	0.240/0.110	29	10	0.99/0.95
		541862	9290019875A	13T8-6U/MAS/24-835/IF20/P 10/1		2000						
	541870	9290019876A	13T8-6U/MAS/24-840/IF21/P 10/1	2100								
	541888	9290019877A	13T8-6U/MAS/24-850/IF21/P 10/1		2100		1	0.140/0.070	16	15	0.98/0.88	


Centium ICN-2P15-TLED-N

ICN-2P15-TLED-N

Brand Name	Centium
Driver Type	T8 LED Electronic
Lamp Connection	Parallel
Input Voltage	120-277V
Input Frequency	50/60 Hz
Status	Active


Enclosure

	In. (cm)
Case Width (W)	1.3 (3.3)
Case Height (H)	1.0 (2.5)
Mounting Length (M)	8.90 (22.6)
Overall Length (L1)	9.5 (24.1)

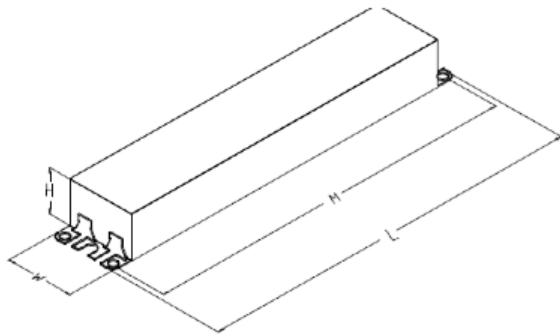

Wiring Diagram

	In. (cm)
Black	24 (61)
White	24 (61)
Blue	28 (71.1)
Red	43 (109.2)

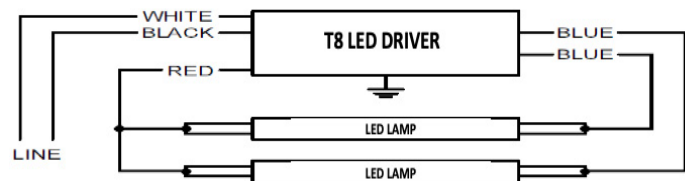

Electrical Specifications

Section I – Physical Characteristics

- 1.1 Driver shall be physically interchangeable with standard electromagnetic or standard electronic ballasts, where applicable.
- 1.2 Driver shall be provided with integral leads color coded per ANSI C82.11.

Section II – Performance Requirements

- 2.1 Driver shall energize compatible LED lamps within 1 second after mains power is applied.
- 2.2 Driver shall provide Independent Lamp Operation (ILO) allowing remaining lamp(s) to maintain full light output when one or more lamps fail.
- 2.3 Driver shall contain auto restart circuitry in order to restart lamps without resetting power.
- 2.4 Driver shall operate from a 50Hz or 60 Hz AC input source of 120V through 277V with sustained variations of +/- 10% (voltage and frequency).
- 2.5 Driver shall be high frequency electronic type and operate lamps at frequencies above 42 kHz to avoid interference with infrared devices and eliminate visible flicker.
- 2.6 Driver shall have a Power Factor of 0.90 or above when operating the maximum rated number of compatible lamps, and 0.77 or above when operating the minimum rated number of compatible lamps.
- 2.7 Driver input current shall Total Harmonic Distortion (THD) of 10% or less when operating the maximum rated number of compatible lamps and 15% or less when operating the minimum rated number of compatible lamps.
- 2.8 Driver shall have a Class A sound rating.
- 2.9 Driver shall have a minimum starting temperature of -13°F / -25°C.
- 2.10 Driver shall tolerate sustained open circuit and short circuit output conditions.
- 2.11 Driver shall be capable of operating lamps remotely and in tandem for wire lengths up to 20 ft.
- 2.12 Driver shall be suitable of operation in up to a 45°C ambient temperature.

Section III – Regulatory Requirements

- 3.1 Driver shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Driver shall be Underwriters Laboratories (UL) Recognized with Both UL and CSA Standards, and suitable for Damp and Dry conditions.
- 3.3 Driver shall comply with ANSI C62.41 Category A Transient protection.
- 3.4 Driver shall comply with the requirements of the Federal Communication Commission (FCC) rules and regulations, Title 47, CFR part 15, Non-Consumer (Class A) for EMI/RFI (conducted and radiated).
- 3.5 Driver shall comply with NEMA 410 for in-rush current limits.

Section IV – Other

- 4.1 Driver shall be manufactured in a factory certified to ISO 9001 Quality System Standards.
- 4.2 Driver shall carry a five year warranty from date of manufacture against defects in material and workmanship when operating in a 45°C ambient environment or less.

